




UNCONTROLLED DOCUMENT

PART NUMBER
SSA-LXB10XX-GF/LP

REV.

REV. E.C.N. NUMBER AND REVISION COMMENTS

DATE

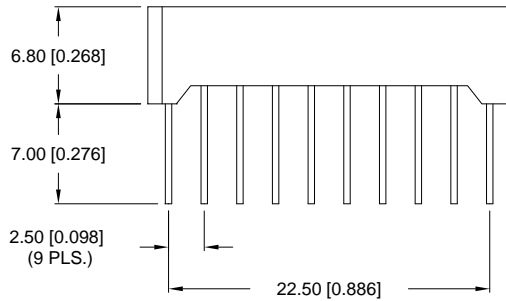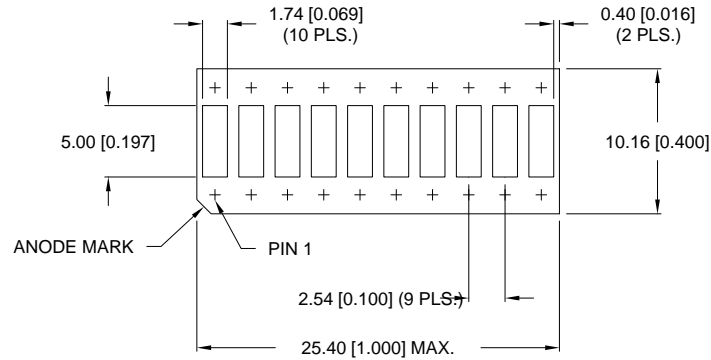

UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCE IS $\pm 0.25\text{mm}$ ($\pm 0.010''$)

REV. PART NUMBER
SSA-LXB10XX-GF/LP

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.



290 E. HELLEN ROAD
PALATINE, ILLINOIS 60067
PHONE: 1-847-359-2790
WEB: HTTP://WWW.LUMEX.COM

10 SEGMENT BAR GRAPH, 'X COLOR' LED,
LOW PROFILE, GRAY FACE WITH 'X COLOR' DIFFUSED EPOXY.

RELIABILITY NOTE
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

DRAWN BY:
BC

CHECKED BY:

APPROVED BY:

DATE: 5-20-99
PAGE: 1 OF 1
SCALE: N/A

- [Options](#)
 - [Order Samples](#)
 - [Stock/Price Request](#)
 - [Sales and Tech Support](#)
3. [Arrays - LEDs/Chips on Board](#)
 4. [10x25mm 10-Chip, 10-Segment](#)

[View](#) Image next to part no. indicates cad file.

Lumex drawings are in PDF format. If you don't have Adobe Acrobat, click on this icon to

[download a free copy](#)



Lumex Part Nbr.	Emitted Color	Peak (nm)	Epoxy Lens Color	Brightness Typical (mCD)	If (mA)	View Angle	Vf@20mA Typical	Vf@20mA Max.
SSA-LXB10GW-GF/LP View	Green <input type="checkbox"/>	565	White Dfsd <input type="checkbox"/>	8	20	160	2.2	2.6
SSA-LXB10HW-GF/LP View	Red <input type="checkbox"/>	700	White Dfsd <input type="checkbox"/>	4	20	160	2	2.5
SSA-LXB10IW-GF/LP View	Red <input type="checkbox"/>	635	White Dfsd <input type="checkbox"/>	8	20	160	2	2.5
SSA-LXB10SRW-GF/LP View	Red <input type="checkbox"/>	660	White Dfsd <input type="checkbox"/>	20	20	160	1.7	2.3
SSA-LXB10YW-GF/LP View	Yellow <input type="checkbox"/>	585	White Dfsd <input type="checkbox"/>	8	20	160	2.1	2.5

Applications

[\[top of page\]](#)

- Status Indicators

- Multi-Chip Assembly
- Molded White Reflector Case
- Addressable Sections
- Low Profile Reflector Height

Options

[\[top of page\]](#)

- Color Lenses Optional
- White Diffused Standard
- Multi-Color Units
- Bi-Color Units

[Home](#) | [What's New](#) | [Product Gallery](#) | [Product Search](#) | [X-Ref Search Engine](#) | [Tech Notes](#) | [Sales and Tech Support](#) | [Corporate Info](#)

290 East Helen Road Palatine, IL 60067 Telephone: (847) 359-2790 Facsimile: (847) 359-8904 E-mail us at sales@lumex.com

© 1997-2001 Lumex, Inc.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Bars and Arrays](#) category:

Click to view products by [Lumex](#) manufacturer:

Other Similar products are found below :

[SSA-LXB10GW-18751](#) [SSA-LXB10YW](#) [SSA-LXH1025I1G7XXD](#) [LTL-2450Y](#) [CSS-414G-11](#) [SSA-LXB10IW](#) [SSB-LX2301SIW](#) [TOS-4102BR-N](#) [SSA-LXB10-IYG8W-1](#) [ADI-AL4554-470](#) [LPB-R0112051S](#) [DI-5GWB](#) [LTA-1000E](#) [LTL-57173HR](#) [HLMP-2655-EF000](#) [HLMP-2820-FG000](#) [KB-2600ID](#) [L-1043GDT](#) [L-875/4IDT](#) [L-875/4SRDT](#) [DC10EGWA](#) [LF1B-NA3P-2THWW2-3M](#) [LF1B-NC3P-2THWW2-3M](#) [LTL-2500G](#) [LTL-2685HR](#) [SSA-LXB10GW](#) [LTA-1000HR](#) [HLMP-2685](#) [HLMP-2400](#) [HLMP-2300](#) [L-875/4YDT](#) [SSB-LXH100SRW](#) [SSB-LX2620IW](#) [SSB-LX2400YW](#) [LPB-S01110101S](#) [DC10SURKWA](#) [LF1B-NA4P-2THWW2-3M](#) [LF1B-NB3P-2THWW2-3M](#) [KB2450SYKW](#) [KB2835CGKD](#) [L-1043IDT](#) [L-1043YDT](#) [L-835/2GDT](#) [LF1B-NF3P-2THWW2-3M](#) [HLCP-B100](#) [HLMP-2450](#) [HLMP-2800](#) [HLCP-H100](#) [HLMP-2300-EF000](#) [HLMP-2400-EF000](#)