
UNCONTROLLED DOCUMENT


PART NUMBER
SSB-LX2500SGW

REV.
В

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
Α	E.C.N. #10241./	9-27-96
В	F.C.N. #10BRDR./REDRAWN & ADDED TOL.	8-31-98

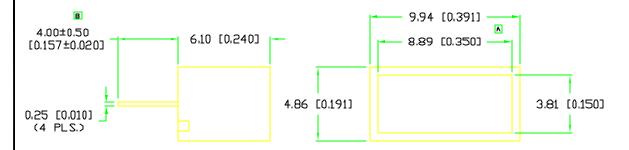

ELECTRO-OPTICAL CHARACTERISTICS TA=25°C If=20mA					
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH	-	65 (GREEN)	nm	
FORWARD VOLTAGE		2.2	2.6	v_f	
REVERSE VOLTAGE	5.0			٧r	I _Γ =100μΑ
axial intensity		25		mcd	$I_f = 20 \text{mA}$
VIEWING ANGLE		160		2x theta	
EMITTED COLOR:	GREEN				
POXY LENS FINISH: MILKY WHITE DIFFUSED					

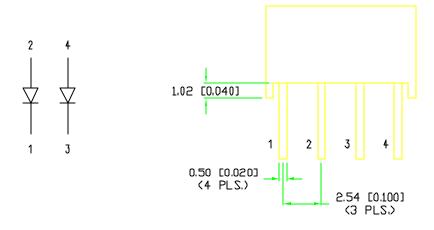

LIMITS OF SAFE OPERATION AT 25°C PER CHIP

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	25	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	- 1.2	mW/°C
OPERATING, STORAGE TEMP.	- 40 TO +85	2°
SOLDERING TEMP.	+ 260	2°
2.0mm FROM BODY		3 SEC. MAX

^{*} t<10µS

UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCE IS ±0.25mm (±0.010")

REV. PART NUMBER SSB-LX2500SGW В

B.89mm x 3.81mm VIEWING AREA LIGHT BAR,

2- 565nm SUPER GRN. LEDS, MILKY WHITE DIFFUSED EPOXY.

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLUSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

LUMEX
INCORPORATED IN

290 E. HELLEN ROAD PALATINE, ILLINOIS 60067 PHONE: 1-847-359-2790 WEB: HTTP://WWW.LUMEX.COM

DRAWN BY: CHECKED BY: APPROVED BY: DATE: 6-6-96 PAGE: 1 OF 1 SCALE: N/A ck/bu

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for LED Bars and Arrays category:

Click to view products by Lumex manufacturer:

Other Similar products are found below:

SSA-LXB10GW-18751 SSA-LXB10YW SSA-LXH1025I1G7XXD LTL-2450Y CSS-414G-11 SSA-LXB10IW SSB-LX2301SIW TOS4102BR-N SSA-LXB10-IYG8W-1 ADI-AL4554-470 LPB-R0112051S DI-5GWB LTA-1000E LTL-57173HR HLMP-2655-EF000 HLMP2820-FG000 KB-2600ID L-1043GDT L-875/4IDT L-875/4SRDT DC10EGWA LF1B-NA3P-2THWW2-3M LF1B-NC3P-2THWW2-3M

LTL-2500G LTL-2685HR SSA-LXB10GW LTA-1000HR HLMP-2685 HLMP-2400 HLMP-2300 L-875/4YDT SSB-LXH100SRW SSB
LX2620IW SSB-LX2400YW LPB-S01110101S DC10SURKWA DF3CGKD LF1B-NA4P-2THWW2-3M LF1B-NB3P-2THWW2-3M

KB2450SYKW KB2835CGKD L-1043IDT L-1043YDT L-835/2GDT LF1B-NF3P-2THWW2-3M HLCP-B100 HLMP-2450 HLMP-2800

HLCP-H100 HLMP-2300-EF000