UNCONTROLLED DOCUMENT


PART NUMBER


SSF-LXHM250XXX

REV. E.C.N. NUMBER AND REVISION COMMENTS

DATE

REV.

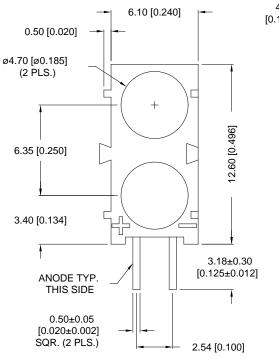

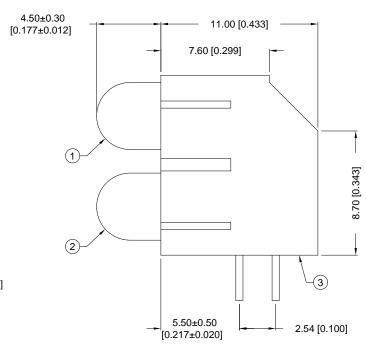

## NOTES:

- 1. SSL-LX509F3XD, LED.
- 2. SSL-LX509F3XD, LED.
- 3. SSH-LXHM250, BLACK HOLDER.

## UNCONTROLLED DOCUMENT

\*UNLESS OTHERWISE SPECIFIED TOLERANCE IS ±0.25mm (±0.010")

REV.

PART NUMBER

SSF-LXHM250XXX

T-5mm (T-1 3/4) LED, RIGHT ANGLE FAULT INDICATOR, FIRST 'X';TOP LED COLOR, SECOND 'X';BOTTOM LED COLOR, THIRD 'X';DIFFUSION OF LENS. CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF

LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

LESS INCORPORATED

290 E. HELLEN ROAD PALATINE, ILLINOIS 60067 PHONE: 1-847-359-2790

PHONE: 1-847-359-2790 WEB: HTTP://WWW.LUMEX.COM

DRAWN BY:

CHECKED BY:

APPROVED BY: DATE:

DATE: 7-7-93
PAGE: 1 OF 1

SCALE:

N/A

- Material Specifications
- Order Samples
- Stock/Price Request
- Sales and Tech Support
- 5. PCB LED Illuicators
- 4. PCB LEDs T-5mm (T-1 3/4)
- 5. P.C.B. LEDs Dual/Tower
- 6. PC LED Dual Mating Holder

View	Image next to part no.				
	indicates cad file.				

Lumex drawings are in PDF format. If you don't have Adobe Acrobat, click on this icon to

download a free copy

Lumex Part Nbr		Emitted Color	Peak (nm)	Operating Current (mA)	Operating Typical Volts (V)	Brightness Typical (mCD)	If (mA)	Led Series Used
SSF- LXHM250GGD	iew	Green	565	10-25	2.1	14	20	SSL- LX509F3XX
SSF- LXHM250IGIGW	iew	Red/Green	635/565	10-25	2.1	8/8	20	SSL- LX509F3IGW
SSF-LXHM250IID V	iew	Red 🗆	635	10-25	2.1	15	20	SSL- LX509F3XX
SSF- LXHM250LGGD	iew	Green	565	1-5	1.8	1.5	2	SSL- LX509F3LXX
SSF- LXHM250LIID	iew	Red 🗆	635	1-5	1.8	1.5	2	SSL- LX509F3LXX
SSF- LXHM250LYYD	iew	Yellow	585	1-5	1.8	1.5	2	SSL- LX509F3LXX
SSF- LXHM250SRSRD	iew	Red 🗆	660	10-25	1.7	70	20	SSL- LX509F3XX
SSF- LXHM250YYD	iew	Yellow	585	10-25	2.1	14	20	SSL- LX509F3XX
			,					,

- Easy P.C. Installation
- Expandable Dual Holder
- Choice of Colors, Current
- Blinking Type Option

## **Material Specifications**

[top of page]

• Holder: Black Nylon

Termination: 0.5mm LeadsInstallation: P.C. Mount/Solder

Home|What's<br/>New|Product<br/>Gallery|X-Ref Search<br/>Engine|Tech<br/>Notes|Sales and Tech<br/>Support|Corporate<br/>Info

290 East Helen Road Palatine, IL 60067 Telephone: (847) 359-2790 Facsimile: (847) 359-8904 E-mail us at sales@lumex.com

© 1997-2001 Lumex, Inc.

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for LED Circuit Board Indicators category:

Click to view products by Lumex manufacturer:

Other Similar products are found below:

568-0701-841F LTL-4221NH129 LTL-42DGNMHDP1 HLMP1521101 HLMP1523802F HLMP1700101F HLMP1700104F BHA-1564-G
SMF-HM1530YD-305 SSF-LXH409SYSUGW AM2520EHSGD HLMP1301104F HLMP1385101F HLMP1421101 HLMP1503103F
HLMP1503104F HLMP1700102F HLMP1700106F HLMP1700107F HLMP1790101F HLMP1790103F LTL-4211NHBP 5390H3 5390H5
551-2802F 552-0794-810F 553-0222-812F HT3-BC-T 564-0700-831F WP59BLGEW 103-3101-1231-403 5502407811F 550-3007-810F
551-3307MF 552080-1 573-2399-100F 592-2020-302F 5932-927-2701-3F SMF-HM1530SRD-509 SSF-LXH100MID SSFLXH2103SRSRDRP SSF-LXH555USBW WP937SB/4YGW WP937EB2EGW HT3-BLU-T 551-0312-802F 553-0110-802F 561-5501-050F 6202T3-5VLC MV60538MP7