


LED Indicators ~ Panel ~ Dome Lens



SSI-LXH312XD-150 Series

T-3mm Black Panel Indicator, 6" Leads

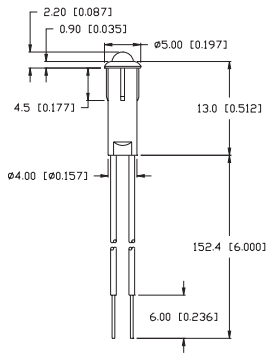

FEATURES / OPTIONS

- ▶ State-of-the-Art, High Brightness LED Chip Technology
- ▶ Choice of LED Colors and Lens Finishes
- ▶ Bi-Color Styles Optional
- ▶ Insulated Lead Lengths Optional
- ▶ Easy Installation Through Panel
- ▶ Small Volumes Acceptable
- ▶ Available Without Insulated Leads (Bare LED Pins)
- ▶ Blinking LED
- ▶ With Internal Resistor for 5V and 12V Operation
- ▶ With Connector



APPLICATIONS / USES

- ▶ Front Panel Status Indicators
- ▶ Alarm/Warning Indicators
- ▶ Front Panel Circuit Fault Indicators
- ▶ Instrument Control Panels
- ▶ Medical Diagnostics Indicators
- ▶ Industrial Automation Control Panels

Lumex Part Number	Die Material	Emitted Color	Peak (nm)	Lens	Operating Current (mA)	Operating TYP. Vf (V)	Brightness TYP. Mcd	@ mA	View Angle° 2θ	Component LED Used
HIGH BRIGHTNESS										
SSI-LXH312SID-150	AllnGaP	Super High Intensity Red	636	Red Diffused	5-25	2	100	20	60	SSL-LX3044SID
SSI-LXH312SOD-150	AllnGaP	Super Orange	610	Orange Diffused	5-25	2	100	20	60	SSL-LX3044SOD
SSI-LXH312SUGD-150	AllnGaP	Super Ultra Green	574	Green Diffused	5-25	2.2	60	20	60	SSL-LX3044SUGD
SSI-LXH312SYD-150	AllnGaP	Super Yellow	590	Yellow Diffused	5-25	2	100	20	60	SSL-LX3044SYD
SSI-LXH312USB-150	InGaN/SiC	Ultra Super Blue	470	Blue Diffused	5-25	3.5	200	20	60	SSL-LX3044USB
SSI-LXH312UWW-150	InGaN/SiC	Ultra White	-	White Diffused	5-25	3.5	500	20	30	SSL-LX3044UWW
STANDARD BRIGHTNESS										
SSI-LXH312GD-150	GaP	Green	565	Green diffused	5-25	2.2	40	20	60	SSL-LX3044GD
SSI-LXH312ID-150	GaAsP	High Intensity Red	635	Red Diffused	5-25	2	50	20	60	SSL-LX3044ID
SSI-LXH312SRD-150	GaAlAs	Super Red	660	Red Diffused	5-25	1.7	150	20	60	SSL-LX3044SRD
SSI-LXH312YD-150	GaAsP	Yellow	585	Yellow Diffused	5-25	2.1	40	20	60	SSL-LX3044YD

SSI-LXR1612XX-150 Series

T-3mm Chrome Indicator, Recessed LED, 6" Leads

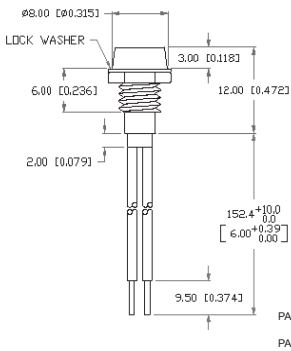

FEATURES / OPTIONS

- ▶ State-of-the-Art, High Brightness LED Chip Technology
- ▶ Choice of LED Colors and Lens Finishes
- ▶ Bi-Color Styles Optional
- ▶ Insulated Lead Lengths Optional
- ▶ Easy Installation Through Panel
- ▶ Small Volumes Acceptable
- ▶ Available Without Insulated Leads (Bare LED Pins)
- ▶ Black Anodized Holder Optional
- ▶ Blinking LED
- ▶ With Internal Resistor for 5V and 12V Operation
- ▶ With Connector

APPLICATIONS / USES

- ▶ Front Panel Status Indicators
- ▶ Alarm/Warning Indicators
- ▶ Front Panel Circuit Fault Indicators
- ▶ Instrument Control Panels
- ▶ Medical Diagnostics Indicators
- ▶ Industrial Automation Control Panels

Lumex Part Number	Die Material	Emitted Color	Peak (nm)	Lens	Operating Current (mA)	Operating TYP. Vf (V)	Brightness TYP. Mcd	@ mA	View Angle° 2θ	Component LED Used
HIGH BRIGHTNESS										
SSI-LXR1612SID-150	AllnGaP	Super High Intensity Red	636	Red Diffused	5-25	2	100	20	60	SSL-LX3054SID
SSI-LXR1612SOD-150	AllnGaP	Super Orange	610	Orange Diffused	5-25	2	100	20	60	SSL-LX3054SOD
SSI-LXR1612SUGD-150	AllnGaP	Super Ultra Green	574	Green Diffused	5-25	2.2	180	20	60	SSL-LX3054SUGD
SSI-LXR1612SYD-150	AllnGaP	Super Yellow	590	Yellow Diffused	5-25	2	250	20	60	SSL-LX3054SYD
SSI-LXR1612USB-150	InGaN/SiC	Ultra Super Blue	470	Blue Diffused	5-25	3.5	80	20	60	SSL-LX3054USB
SSI-LXR1612UWW-150	InGaN/SiC	Ultra White	-	White Diffused	5-25	3.5	500	20	30	SSL-LX3054UWW
STANDARD BRIGHTNESS										
SSI-LXR1612GD-150	GaP	Green	565	Green diffused	5-25	2.2	40	20	60	SSL-LX3054GD
SSI-LXR1612ID-150	GaAsP	High Intensity Red	635	Red Diffused	5-25	2	40	20	60	SSL-LX3054ID
SSR-LXR1612SRD-150	GaAlAs	Super Red	660	Red Diffused	5-25	1.7	80	20	60	SSL-LX3054SRD
SSI-LXR1612YD-150	GaAsP	Yellow	585	Yellow Diffused	5-25	2.1	12	20	60	SSL-LX3054YD



USA/Canada +1-800-278-5666
 Europe +49-6081-964380
 Asia +886-3-5821124



www.lumex.com



USA/Canada +1-847-359-8904
 Europe +49-6081-964381
 Asia +886-3-5821154



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Panel Mount Indicators](#) category:

Click to view products by [Lumex](#) manufacturer:

Other Similar products are found below :

[607-3232-140F](#) [821-0331-503](#) [FL2870C8R](#) [FL2950WL7B](#) [FL2950WL8G](#) [FL589WL8R](#) [FL67C8R](#) [H8630FBBA3](#) [NL177WL2A](#)
[NL177WL3G](#) [NL276C2A](#) [NL2950BWL3G](#) [NL589WL2R](#) [NL67C2C](#) [NL67C3R](#) [C480AABG3](#) [PB22BM41K](#) [PB22SIM40Y](#)
[PB22SKRS31KC](#) [L32R-R2-2311](#) [L3353-MWRG](#) [L39UR-R24-2111](#) [L58D-G2-W](#) [L58D-Y2-W](#) [L59D-R12-W](#) [L59UD-R12-W](#) [L625DG](#)
[L625DR](#) [LE177WL39007](#) [LE2950BWL39018](#) [LH1048BSWL3702](#) [LH1048BWL3702](#) [LH382A](#) [LH677G](#) [LHM628A](#) [FL276WL7R](#)
[FL2950BWL7R](#) [FL2950WL7R](#) [FL2950WL8R](#) [FL2950WL8R-12](#) [FL2951WL8G](#) [FL2951WL8R](#) [FL589C7R](#) [FL67WL8G](#) [MPC5BCW18.0](#)
[556-1605-808F](#) [556-1705-809F](#) [556-3008-839F](#) [558-0201-818F](#) [559-0001-813F](#)