


## SSI-LXR4815SOD-150

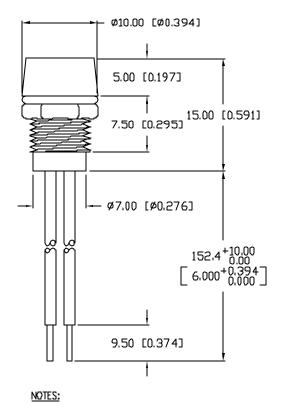





## PANEL CUTOUT

١.	SSL−LX5OB3SΩD,	ORANGE LED.	TRIM LEADS	TO 5mm.			
_							

- 2. SSI-LXR4815, CHROME HOUSING.
- 3. SSH-LXH4815BSC, BLACK NYLON BUSHING. (NOT SEEN)
- 4. ANODE LEAD: LXP-WST24RDTOC, RED INSULATION, 160mm LONG, STRIP 2mm & 9.5mm.
- 5. CATHODE LEAD: LXP-WST24BLTOC, BLACK INSULATION, 16Dmm LONG, STRIP 2mm & 9.5mm.

electro-optical	CHARACTERIS	TICS TA=25	5'C	lf=20mA		
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND	
PEAK WAVELENGTH		610		nm		
FORWARD VOLTAGE		2.0	2.5	$V_f$		
REVERSE VOLTAGE	5.0			$V_r$	Ir=100μA	
AXIAL INTENSITY		100		mcd	$I_f = 20 \text{mA}$	
VIEWING ANGLE		60		2x theta		
EMITTED COLOR:	ORANGE					
epoxy lens finisi	H: ORANGE	DIFFUSED				

### LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	<i>3</i> 0	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	- 1.2	m₩/°C
OPERATING, STORAGE TEMP.	- 40 TO + 85	•ć

\* t<10µS

UNCONTROLLED DOCUMENT

\*UNILESS OTHERWISE SPECIFIED TOLERANCES PER DECINAL PRECISION ARE: X=±1 (±0.039), XXX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECINAL PRECISION MAX.= +0.00 (±0.000), XXX=±0.127 (±0.000), XXXX=±0.127 (±0.000), XXXX=±0.000, XXX=±0.000, XXX=±0.00

REV.

PART NUMBER

SSI-LXR4815SOD-150

T-5mm 610nm AllnGaP ORANGE LED PANEL INDICATOR LED, ORANGE DIFFUSED LENS, WITH 6" WIRE LEADS.

Confidential information

The information contained in this document is the property of Lumex No., except as specifically authorized in writing by Lumex inc., the holder of this document shall keep all information contained herein confidential and shall protect same in whole or

IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



BC

290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com TW WEB: www.lumex.com.tw

CHECKED BY: APPROVED BY: DRAWN BY:

DATE: 1.10.02 PAGE: 1 OF 1 SCALE: N/A

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for LED Panel Mount Indicators category:

Click to view products by Lumex manufacturer:

Other Similar products are found below:

607-3232-140F 821-0331-503 FL2870C8R FL2950WL7B FL2950WL8G FL589WL8R FL67C8R H8630FBBA3 NL177WL2A NL177WL3G NL276C2A NL2950BWL3G NL589WL2R NL67C2C NL67C3R C480AABG3 PB22BM41K PB22SIM40Y PB22SKRS31KC L32R-R2-2311 L3353-MWRG L39UR-R24-2111 L58D-G2-W L58D-Y2-W L59D-R12-W L59UD-R12-W L625DG L625DR LE177WL39007 LE2950BWL39018 LH1048BSWL3702 LH1048BWL3702 LH382A LH677G LHM628A FL276WL7R FL2950BWL7R FL2950WL8R FL2950WL8R-12 FL2951WL8G FL2951WL8R FL589C7R FL67WL8G MPC5BCW18.0 556-1605-808F 556-1705-809F 556-3008-839F 558-0201-818F 559-0001-813F