


UNCONTROLLED DOCUMENT



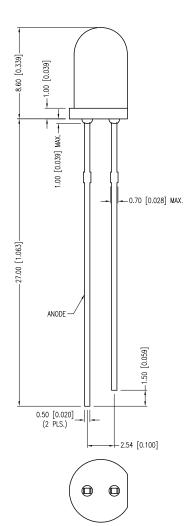

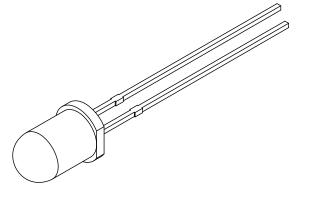

PART NUMBER	SSL-LX5093GT	REV.	E
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.
01.31.95	UPDATED SPECS.		Α
11.10.97	REDRAWN.		В
05.29.01	E.C.N. #10BRDR. & REDRAWN IN 3D.		С
10.19.06	E.C.N. #11148		D
02.01.12	E.C.N. #10BRDR. & REDRAWN.		E

ELECTRO-OPTICAL CHARACTERISTICS Ta=25°C If=20mA PARAMETER TYP UNITS TEST COND PEAK WAVELENGTH 565 FORWARD VOLTAGE 2.2 2.6 Vf REVERSE VOLTAGE 5.0 Vr Ir=100µA AXIAL INTENSITY 50 If=20mA mcd VIEWING ANGLE 30 2x theta EMITTED COLOR: GREEN EPOXY LENS FINISH: GREEN TRANSPARENT

LIMITS OF SAFE OPERATION AT 25°C PARAMETER MAX UNITS 150 PEAK FORWARD CURRENT\* mΑ 25 STEADY CURRENT mΑ POWER DISSIPATION 105 mW -1.2mW/°C DERATE FROM 25°C OPERATING TEMP. -40 TO +85 °C STORAGE TEMP. -40 TO +85 °C SOLDERING TEMP. +260 ·C 2.0mm FROM BODY SEC. \* t<10µS

\*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN=  $^{+DECIMAL}_{-0.00}$  PRECISION MAX.=  $^{+0.00}_{-0.00}$  MAX.=  $^{+0.00}_{-0.00}$  PRECISION ARE: X=±1 (±0.039), X.XX=±0.5 (±0.020), X.XX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD SIZE=±0.05 (±0.003). MIN=  $^{+DECIMAL}_{-0.00}$  PRECISION MAX.=  $^{+0.00}_{-0.00}$  MAX.=  $^{+0.00}_{-0.00}$  PRECISION MAX.=  $^{+0.00}_{-0.00}$  MAX.=  $^{+0.00}_{-0.00}$  PRECISION MAX.=  $^{+0.00}_{-0.00}$  MAX. UNCONTROLLED DOCUMENT



425 N. GARY AVE. CAROL STREAM, IL 60188-4900 PHONE: +1.800.278.5666 FAX: +1.630.315.2152 WEB: WWW.LUMEX.COM MEMBER OF ITW PHOTONICS GROUP QUASARBRITE T-5mm (T-1 3/4) 565nm GREEN LED, GREEN TRANSPARENT LENS.

\*\*THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.\*\*

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE: 02.01.12 DRAWN BY: AΒ PAGE: 1 OF CHKD BY: KF SCALE: NTS APRVD BY: KF UNIT: mm [INCH] (Pb)

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Standard LEDs - Through Hole category:

Click to view products by Lumex manufacturer:

Other Similar products are found below:

LTL-10254W LTL-1214A LTL-2231AT LTL-3251A LTL-4262N LTL-433P LTL-5234 LTL87HTBK LTW-87HD4B HLMP-EL30-PS0DD 1L0532V23G0TD001 NSPW500CS NTE30036 NTE30044 NTE30059 NTE3020 LD CQDP-1U3U-W5-1-K

LP379PPG1C0G0300001 SLR-342MC3F SLX-LX3044GD SLX-LX3044ID SLX-LX3044YD 1.90690.3330000 SSS-LX4673ID-410B

1L0532Y24I0TD001 264-7SYGD/S530-E2 HLMP-1301-G00FG HLMP1385 LTL-10224W LTL-1224A LTL-1234A LTL-2251AT LTL-403HR LTL-4222 LU7-E-B 4380H1 HLMP-3962-F0002 HLMP-GG15-R0000 323-2SURD/S530-A3 L53SRC/E-Z L-7679C1ZGC

4302T1-5V 4306D23 4363D1/5 WP1503SRC/J4 WP153GDT WP153YDT WP1543SGC WP1543SURC WP53MGD