

DESCRIPTION

The **PDV-P9005-1** are (CdS), Photoconductive photocells designed to sense light from 400 to 700 nm. These light dependent resistors are available in a wide range of resistance values. They're packaged in a two leaded plastic-coated ceramic header.

FEATURES

- Visible light response
- Sintered construction
- Low cost

RELIABILITY

This Luna high-reliability device is in principle able to meet military test requirements (Mil-STD-750, Mil-STD-883) after proper screening and group test. Contact Luna for recommendations on specific test conditions and procedures.

APPLICATIONS

- Camera exposure
- Shutter controls
- Night light controls

ABSOLUTE MAXIMUM RATINGS

SYMBOL	MIN		MAX	UNITS	(TA)= 23°C UNLESS OTHERWISE NOTED
Applied Voltage	-	-	150	V	-
Continuous Power Dissipation	-	-	90	mW/°C	-
Operation and Storage Temperature	-30	to	+75	V	-
Soldering Temperature*	-	-	+260	°C	-

* 0.200 inch from base for 3 seconds with heat sink.

OPTO-ELECTRICAL PARAMETERS

T_a = 23°C UNLESS NOTED OTHERWISE


PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Dark Resistance	After 10 sec. @ 10 Lux @ 2856°K	20	-	-	MΩ
Illuminated Resistance	10 Lux @ 2856°K	48	-	140	KΩ
Sensitivity	$\frac{\text{Log}(R100) - \text{Log}(R10) **}{\text{Log}(E100) - \text{Log}(E10) ***}$	-	0.9	-	Ω/Lux
Spectral Application Range	Flooded	400	-	700	nm
Spectral Application Range	Flooded	-	520	-	nm
Rise Time	10 Lux @ 2856 °K	-	60	-	ms
Fall Time	After 10 Lux @ 2856 °K	-	25	-	MΩ

**R100, R10: cell resistances at 100 Lux and 10 Lux at 2856 °K respectively .

***E100, E10: luminances at 100 Lux and 10 Lux 2856 °K respectively.

TYPICAL PERFORMANCE

CELL RESISTANCE vs. ILLUMINANCE

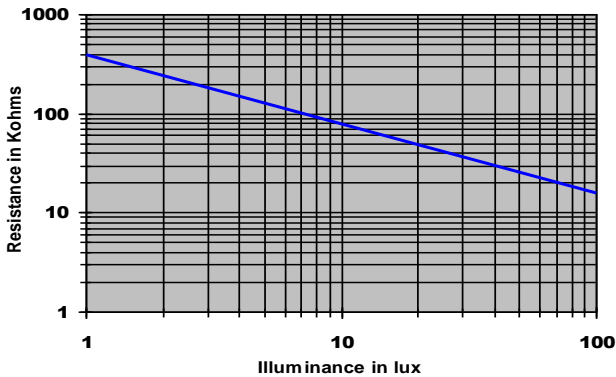

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [luna optoelectronics](#) manufacturer:

Other Similar products are found below :

[PDI-E804](#) [PDB-V615-2](#) [PDB-V601-1-25](#) [PDB-C110](#) [PDV-P9004](#) [PDB-C109](#) [PDB-V107](#) [PDB-C612-2](#) [PDB-C107](#) [SLSD-71N300](#) [PDV-P9103](#) [NSL-4960](#) [PDB-C609-2](#) [PDB-C158F](#) [PDV-P5002](#) [NSL-6910](#) [PDB-C613-2](#) [NSL-5150](#) [NSL-5510](#) [PDV-P8101](#) [PDV-P8005](#) [NSL-32SR2S](#) [PDV-P8107](#) [PDB-C160SM](#) [PDV-P5001](#) [PDV-P7002](#) [PDV-P9003-1](#) [SLD-70BG2A](#) [PDV-P5003](#) [PDV-P9003](#) [NSL-5540](#) [NSL-32SR2](#) [PDV-P8006](#) [PDV-P8102](#) [PDB-C158](#) [NORPS-12](#) [PDV-P8001](#) [PDB-C171SM](#) [PDV-P9002](#) [PDV-P9200](#) [PDV-P9005](#) [APW-MW2-1210-010](#) [NSL-5152](#) [NSL-5162](#) [NSL-5112](#) [PDV-P9203](#) [NSL-6110](#) [NSL-06S53](#) [PDV-P9002-1](#) [PDB-C139](#)