

# Technical data sheet - Interface Technology

Microcompact current/analog converter



<b>Identification</b>	Type Part-No.	WAA 7-0540 750540
<b>Description</b>	Input: AC/DC 0 – 1 A Output: 0 – 10 V / 0 – 20 mA / 4 – 20 mA - adjustable Insulation: 2.5 kV, 3-way isolation	
<b>Input</b>	Input signal AC/DC 0–1 A, $\pm 1$ A Input variable Single analog signal Galvanic isolation I/O 3-way isolation Zero /Span Production comparison Line frequency 15 – 400 Hz Input resistance typ. 0.06 $\Omega$	
<b>Output</b>	Output signal adjustable via DIP switch S1 Max. load impedance at I-output 400 $\Omega$ Output current max. 21 mA Residual ripple <5 mV <sub>eff</sub>	
<b>Operating data</b>		

15.10.2019 – Subject to technical modification

Part-No. 750540

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA  
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223  
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park  
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU  
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2  
www.lutze.com • sales.gb@lutze.co.uk

## Technical data sheet - Interface Technology

---

Accuracy	0.5 % FSR @ 23 °C
Linearity error	0.1 % FSR @ 23 °C
Build-up time (Accuracy 1%)	150 ms
Temperature coefficient	<150 ppm / K FSR

---

### General

Rated voltage $U_N$	DC 24 V
Operation voltage range	DC 16.8–30 V
Status indication	LED yellow
Insulation voltage input / output	2.5 kV <sub>eff</sub>
Housing material	PA 6.6 (UL 94 V-0, NFF I2, F2)
Color of the housing	light grey
Mounting	DIN rail mountable TS35 (EN 60715)
Protection class	IP20
Installation position	any
Connection type	Screw terminal
Operation temperature range	-25 °C ... +60 °C
Storage temperature range	-40 °C ... +85 °C
Dimensions (w × h × d)	6.2 × 90.0 × 115.5 mm
Weight	0.055 kg/piece
PU	1 piece
Approvals	cULus Cl.1 Div2, Gr. A, B, C, D, T4A

---

### Failure Rate Prediction (MTBF)

Standards	Electronic components – Reliability – Reference conditions for failure rates and stress models for conversion: EN/IEC 61709 Failure Rates of Components – Expected values: SN 29500
Failure rate at +45 °C	639 fit
Failure rate at +45 °C	1564896 h 1 fit equals one failure per 10 <sup>9</sup> component hours The indicated temperature is the mean component ambient temperature.
Comments	The results are valid under following conditions: Automotive environment or industrial areas without extreme dust levels and harmful substances Continuous operation 8760 h per year

15.10.2019 – Subject to technical modification

Part-No. 750540

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA  
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223  
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.


Unit 3, Sandy Hill Park  
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU  
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2  
www.lutze.com • sales.gb@lutze.co.uk




SYSTEMATIC TECHNOLOGY

# Technical data sheet - Interface Technology

## Dimensions

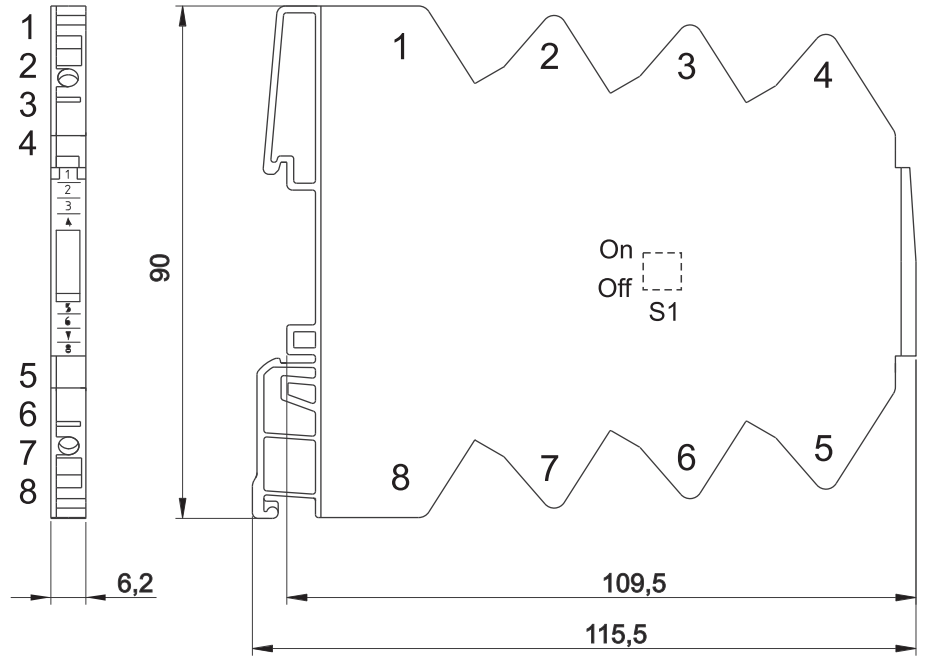

## PIN assignment



## Range adjustment

		S1			
Input	Output	1	2	3	4
0-1A	0-10V				
0-1A	0-20mA	●			
0-1A	4-20mA	●			

15.10.2019 – Subject to technical modification

Part-No. 750540

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA  
 Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223  
 www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park  
 Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU  
 Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2  
 www.lutze.com • sales.gb@lutze.co.uk

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Measuring Tools](#) category:*

*Click to view products by [LUTZE](#) manufacturer:*

Other Similar products are found below :

[G336](#) [M225203-01](#) [G426](#) [G1333](#) [G1327](#) [G1154](#) [G1150](#) [G1152](#) [G1157](#) [G1153](#) [G1155](#) [G1009](#) [1051-03](#) [121010D](#) [121050D](#) [25541](#) [8255](#)  
[NF-221200130](#) [20323](#) [20329](#) [20363](#) [20365](#) [20515](#) [20516](#) [G800](#) [G1229](#) [5205000](#) [5206000](#) [5223000](#) [6921000](#) [YT-30061](#) [W002900](#)  
[W061008](#) [W061009](#) [W061010](#) [W062004](#) [W066005](#) [W066006](#) [15225](#) [16135](#) [16456](#) [17215](#) [17218](#) [17221](#) [17670](#) [17672](#) [17677](#) [17953](#)  
[18115](#) [18879](#)