


## Specifications

| Parameter             | Specification                                  |
|-----------------------|--|
| Bias Current          | 0  |
| Output Polarity       | Negative <sup>4</sup>                          |
| Video Resistance      | 80 Ohms Nominal <sup>2</sup>                   |
| Maximum Power         | 40 mW CW or 3 erg spike                        |
| Temperature Stability | ± 1 dB over operating range of -65°C to +100°C |
| Temperature Range     | -65°C to +100°C                                |
| Finish                | Passivated Stainless Steel                     |

## Mechanical Outline Drawing

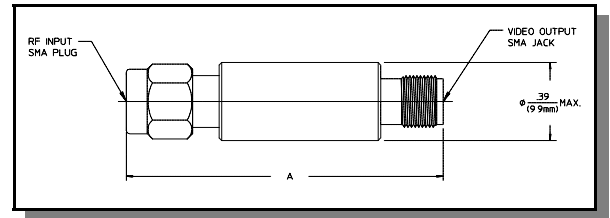

| Detector Part Number | Frequency Range (GHz) | Flatness <sup>1</sup> Typical (± dB) | VSWR <sup>1</sup> Typical | Open Circuit Sensitivity <sup>2</sup> (mV/mW) |      | Tangential Sensitivity <sup>3</sup> (-dBm) |      | Output Capacitance Typical (pF) | Dim. A Inches (mm) |
|----------------------|-----------------------|--------------------------------------|---------------------------|---|------|--|------|---------------------------------|--------------------|
|                      |                       |                                      |                           | Typ.  | Min. | Typ.                                       | Min. |                                 |                    |
| 2085-6010-00         | 1.0 - 18.0            | 1.5                                  | 4.0                       | 500   | 400  | 47.0                                       | 46.0 | 12                              | 1.35 (34.3)        |
| 2085-6013-00         | 1.0 - 2.0             | 0.2                                  | 2.5                       | 780   | 700  | 53.0                                       | 52.0 | 18                              | 1.35 (34.3)        |
| 2085-6014-00         | 2.0 - 4.0             | 0.3                                  | 1.8                       | 840   | 750  | 53.5                                       | 52.5 | 18                              | 1.55 (39.4)        |
| 2085-6015-00         | 4.0 - 8.0             | 0.4                                  | 2.5                       | 610   | 525  | 52.0                                       | 51.0 | 12                              | 1.55 (39.4)        |
| 2085-6016-00         | 8.0 - 12.4            | 0.5                                  | 2.0                       | 640   | 550  | 52.5                                       | 51.5 | 12                              | 1.55 (39.4)        |
| 2085-6017-00         | 12.4 - 18.0           | 0.5                                  | 2.5                       | 600   | 500  | 52.0                                       | 51.0 | 9                               | 1.55 (39.4)        |

## Typical Extended Band Performance

| Detector Part Number | Frequency Range (GHz) | Flatness <sup>1</sup> Typical (± dB) | VSWR <sup>1</sup> Typical | Open Circuit Sensitivity <sup>2</sup> (mV/mW) Typical | Tangential Sensitivity <sup>3</sup> (-dBm) | Output Capacitance Typical (pF) |
|----------------------|-----------------------|--------------------------------------|---------------------------|---|--|---------------------------------|
| 2085-6013-00         | 0.85 - 6.0            | 1.0                                  | 3:1                       | 500   | 50.0                                       | 18                              |
| 2085-6014-00         | 1.4 - 5.0             | 1.0                                  | 3:1                       | 500   | 50.0                                       | 18                              |
| 2085-6015-00         | 3.9 - 9.5             | 1.0                                  | 3:1                       | 500   | 50.0                                       | 12                              |
| 2085-6016-00         | 6.5 - 14.0            | 1.0                                  | 3:1                       | 400   | 49.0                                       | 12                              |
| 2085-6017-00         | 2.7 - 18.5            | 1.0                                  | 3:1                       | 400   | 49.0                                       | 9                               |

1. For RF Power levels below -20 dBm, and with 1,000 ohm load.
2. For RF power levels below -20 dBm.
3. With video amplifier of 1 MHz bandwidth, and 2 dB noise figure.
4. For Positive Output change suffix to -13.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [RF Detector](#) category:*

*Click to view products by [MACOM](#) manufacturer:*

Other Similar products are found below :

[HMC439QS16GTR](#) [HMC7447-SX](#) [MACP-010562-TR1000](#) [R451075000](#) [2085-6013-13](#) [2085-6010-00](#) [32-2018-BU](#) [32-3033-BU](#) [32-3203-BU](#) [AD8361ARMZ-REEL](#) [LT5534ESC6#TRPBF](#) [AD8361ARM-REEL7](#) [AD8314ARMZ-REEL](#) [AD8311ACBZ-P7](#) [AD8312ACBZ-P7](#) [AD8313ARMZ](#) [AD8313ARMZ-REEL7](#) [AD8314ARMZ](#) [AD8314ARMZ-REEL7](#) [AD8315ARMZ](#) [AD8317ACPZ-R7](#) [AD8319ACPZ-R7](#) [AD8361ARMZ](#) [AD8361ARMZ-REEL7](#) [AD8362ARUZ-REEL7](#) [AD8363ACPZ-R7](#) [AD8302ARUZ-RL7](#) [ADL5906ACPZN-R7](#) [ADL5500ACBZ-P7](#) [ADL5502ACBZ-P7](#) [ADL5504ACBZ-P7](#) [ADL5505ACBZ-P7](#) [ADL5506ACBZ-R7](#) [ADL5506WACBZ-R7](#) [ADL5513ACPZ-R7](#) [ADL5903ACPZN-R7](#) [ADL5903SCPZN-R7](#) [ADL6010ACPZN-R2](#) [ADL6010SCPZN](#) [ADL6010SCPZN-R7](#) [ADL6010SCPZN-R2](#) [ADL6010ACPZN](#) [ADL6012ACPZN](#) [ADL5511ACPZ-R7](#) [ADL5904ACPZN-R7](#) [ADL5910ACPZN-R7](#) [HMC1010LP4E](#) [HMC1010LP4ETR](#) [HMC1021LP4E](#) [HMC1030LP5E](#)