

#### Hybrid Junction, 10 - 500 MHz

Rev. V3


#### **Features**

- · Broad Frequency Range
- Fully Hermetic Package (HHS-110)
- · High Isolation: Typically 30 dB
- Impedance: 50 Ohms Nominal
- Input Power: 1 Watt Maximum
- MIL-STD-202 Screening Available


#### **Description**

3 dB Hybrids are ideal for dividing a signal into two signals of equal amplitude and a constant 90° or 180° phase differential and for Quadrature combining or performing summation/differential combining.


#### SF-1 (HHS-110)

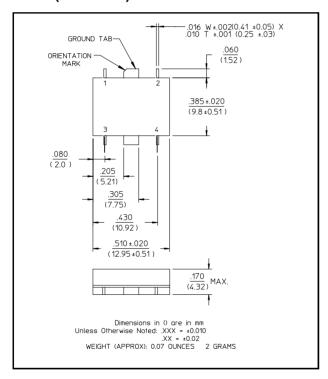

#### FP-2 (HH-110)

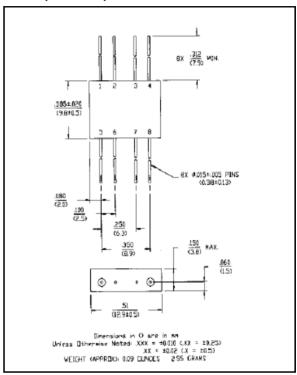

#### TO-8-2 (HH-127)

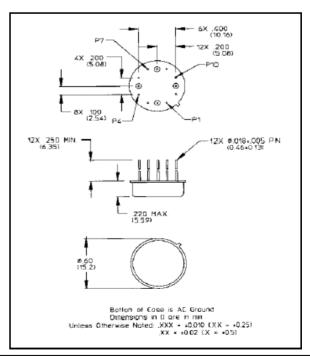

1

# HH-/HHS-110/HH-127



## Hybrid Junction, 10 - 500 MHz

Rev. V3

#### **Pin Configuration (HH-110)**

Pin No.	Function	Pin No.	Function	
1	А	5	В	
2	GND	6	GND	
3	GND	7	GND	
4	С	8	D	


# Pin Configuration (HHS-110)

Pin No.	Function	Pin No.	Function
1	Α	3	В
2	С	4	D

## Pin Configuration (HH-127)

Pin No.	Function	Pin No.	Function
1	GND	7	GND
2	С	8	В
3	GND	9	GND
4	GND	10	GND
5	А	11	D
6	GND	12	GND

### **Functional Diagram**





### Hybrid Junction, 10 - 500 MHz


Rev. V3


## Electrical Specifications<sup>1</sup>: T<sub>A</sub> = -55°C to +85°C


Parameter	Test Conditions	Frequency	Units	Min	Тур	Max
Insertion Loss	Less Coupling	10 - 500 MHz 25 - 200 MHz	dB dB		_	1.4 1.0
Isolation		10 - 500 MHz 25 - 200 MHz	dB dB	20 30	_	_
Amplitude Balance	_	10 - 500 MHz 25 - 200 MHz	dB dB		_	0.6 0.4
VSWR	_	10 - 500 MHz 25 - 200 MHz	Ratio Ratio	_	_	2.0:1 1.6:1
Phase Balance	_	10 - 500 MHz 25 - 200 MHz	0	_	_	7 5

1. All specifications apply with 50 ohm source and load impedance.

## **Typical Performance Curves**







#### **Ordering Information**

Part Number	Package
HH-110 PIN	FP-2
HHS-110	SF-1
HH-127 PIN	TO-8-2

# HH- / HHS-110 / HH-127



Hybrid Junction, 10 - 500 MHz

Rev. V3

#### M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppels or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Signal Conditioning category:

Click to view products by MACOM manufacturer:

Other Similar products are found below:

MAPDCC0001 MAPDCC0004 PD0409J5050S2HF 880157 HHS-109-PIN DC1417J5005AHF AFS14A30-2185.00-T3 AFS14A35-1591.50-T3 DS-323-PIN B39321R801H210 1A0220-3 JP510S LFB212G45SG8C341 LFB322G45SN1A504 LFL182G45TC3B746 SF2159E 30057 FM-104-PIN CER0813B MAPDCC0005 3A325 40287 41180 ATB3225-75032NCT BD0810N50100AHF BD2425J50200AHF C5060J5003AHF JHS-115-PIN JP503AS DC0710J5005AHF DC2327J5005AHF DC3338J5005AHF 43020 LFB2H2G60BB1C106 LFL15869MTC1B787 X3C19F1-20S XC3500P-20S 10013-20 SF2194E CDBLB455KCAX39-B0 TGL2208-SM, EVAL RF1353C PD0922J5050D2HF 1E1305-3 1G1304-30 B0922J7575AHF 2020-6622-20 TP-102-PIN TP-103-PIN BD1222J50200AHF