

## Features

- ◆ May be Driven Directly by TTL Signals
- ◆ RoHS Compliant
- ◆ Low Series Resistance
- ◆ Fast Switching Speed
- ◆ No Reverse Bias Required
- ◆ RoHS Compliant

## Description


Gallium Arsenide PIN diodes offer improved performance characteristics over silicon in many microwave semiconductor applications. These benefits result from the intrinsic semiconductor properties of GaAs. Its inherent high carrier mobility results in a low resistance fast switching device. The low carrier concentration in the I region layer produces a near zero punch through bias voltage. Gallium Arsenide's high band gap also assures it will operate at high operating temperatures.

Switching speeds in the low nanosecond range using an inexpensive TTL buffer logic is attainable with GaAs PIN diodes. This performance can be achieved because GaAs PIN diodes exhibit high impedance at a positive bias (up to .5V). Reverse bias is not required for many GaAs PIN diode applications. Low loss, in switch and phase shifter circuits at frequencies up to 40 GHz is possible as a result of low parasitic series resistance in the conducting and non-conducting states.

*M/A-COM's Technology Solutions GaAs PIN diode chips are also available in several different package styles. (See page 4 of this datasheet)*

## Absolute Maximum Ratings<sup>1</sup>

Parameter	Maximum Value
Operating Temperature	-65°C to +175°C
Storage Temperature	-65°C to +175°C
Power Dissipation	0.25W @ 25°C
Junction Temperature	+175°C
Mounting Temperature	+320°C for 10 seconds

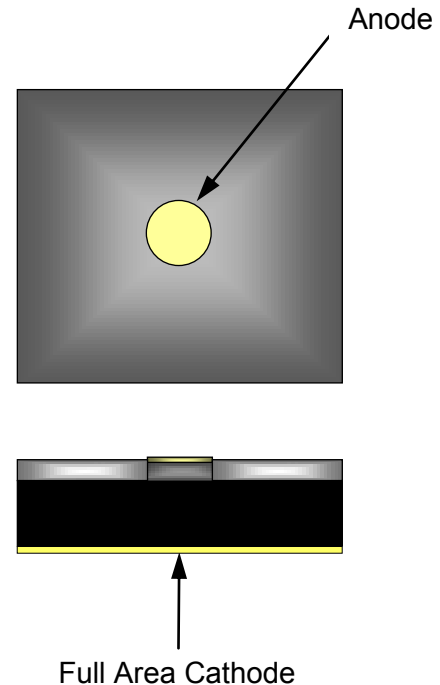

## MIL-STD 750 Environmental Ratings

Parameter	Method	Level
Temp. Cycling	1051	5cycles -65°C to +150°C
Vibration	2056	15g's
Constant Acceleration	2006	20,000g's
Moisture Resistance (Packaged diodes)	1021	10 Days

<sup>1</sup> 1. Exceeding these limits may cause permanent damage.


## GaAs Chip Specification @ $T_{AMB} = +25^{\circ}\text{C}$

Part Number	Max. Rev. Volt. <sup>1</sup> $V_R < 10 \mu\text{A}$ $V_{DC}$	Max. Cap. 1 MHz $C_j @ -10 \text{V}$ pF	Max. Series Res. <sup>2</sup> 1 GHz $R_S @ 20 \text{mA}$ $\Omega$	Nominal Characteristics	
				Carrier Lifetime $T_L @ I_{FOR} = 10 \text{mA}$ $I_{REV} = 6 \text{mA}$ $\eta\text{S}$	Switching Speed <sup>3</sup> 7 GHz $\eta\text{S}$
MA4GP022-277	50	0.15	1.0	20	10
MA4GP030-277 <sup>4</sup>	100	0.06	2.0	25	15

**Notes:**


- $V_R$  ( Reverse Voltage ) is sourced and the resultant reverse leakage current,  $I_r$ , is measured to be  $<10\mu\text{A}$ .
- Chip is mounted into case style ODS 30 ceramic package.
- Switching speed is measured between 1 dB and 20 dB loss in a shunt mounted switch.
- Available as chip with flying leads. Part number is MADP-000030-13930G.

### Case Style 277 (Chip)

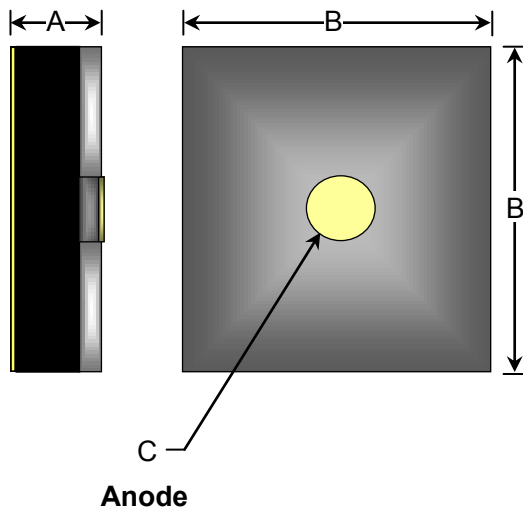

Dimension	Mils	Millimeters
A	$7 \pm .5$	$.178 \pm .013$
B	$11 \pm 1$	$.279 \pm .025$
C	$2.2 \pm .3$	$.056 \pm .008$

### Typical TTL Driver Circuit

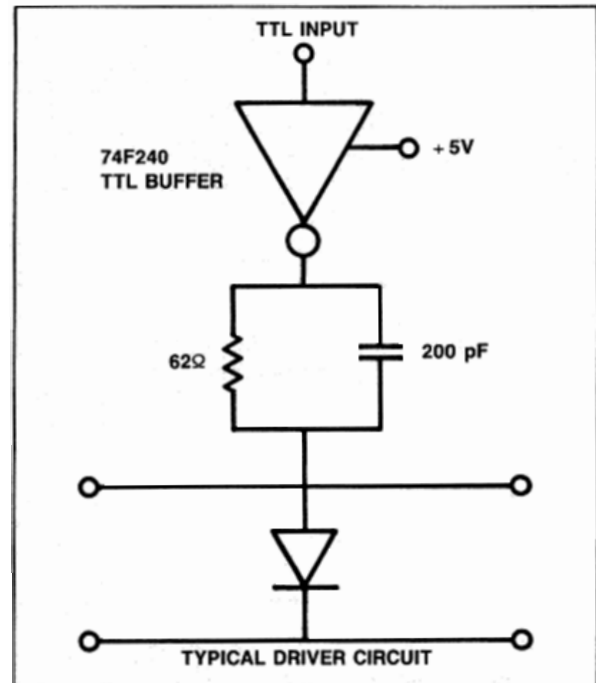

## Typical Performance @ $T_{AMB} = +25^{\circ}C$

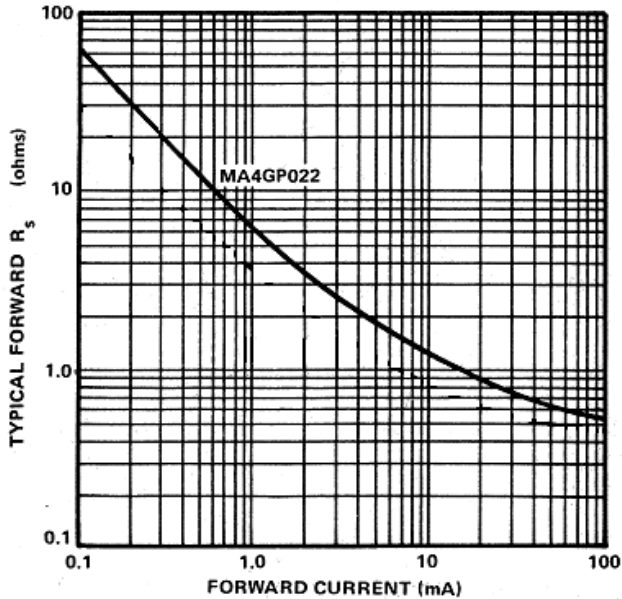


FIGURE 1. Typical Forward  $R_S$  vs. Forward Current at 1 GHz

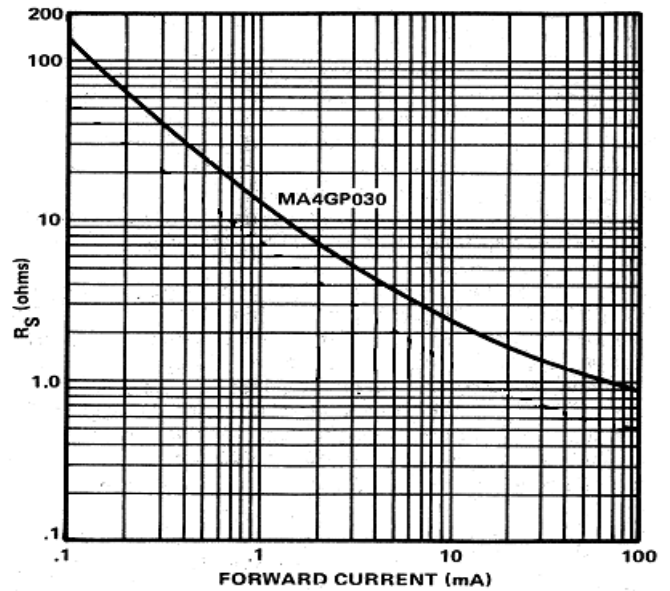


FIGURE 2. Typical Forward  $R_S$  vs. Forward Current at 1 GHz

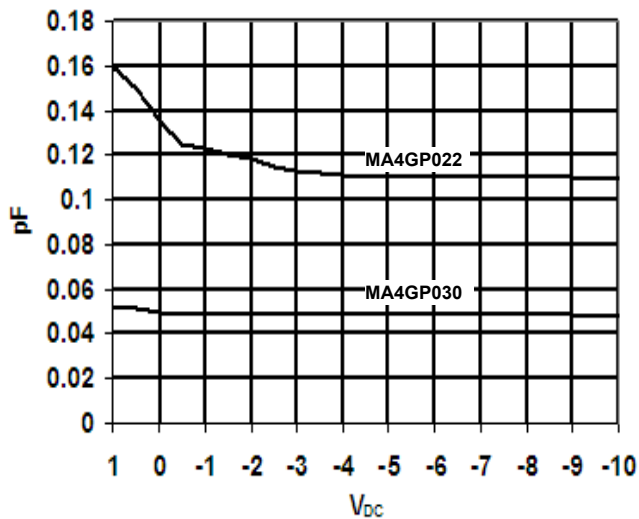


Figure 3. Typical Capacitance vs. Voltage at 1 GHz

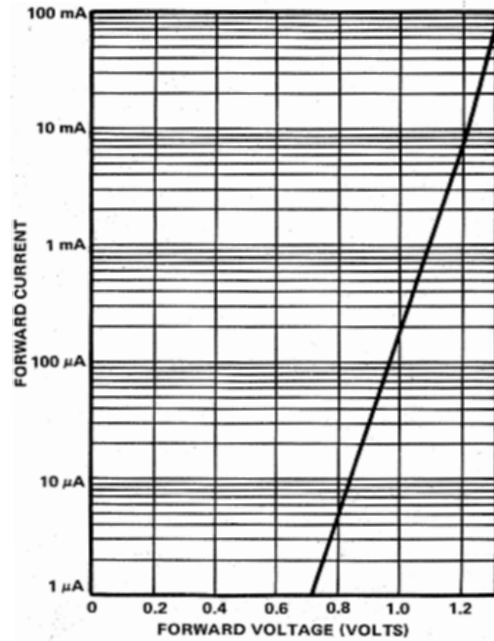


FIGURE 4. Typical Characteristics at 25° C Forward Current vs. Forward Voltage (All GaAs PIN Diodes)

## Ordering Information

The GaAs Chip Specifications shown in the table on page 2 are for the stand alone die, package style 277. Note that the table lists the bare die junction capacitance and that the total capacitance for the base part in an alternative package will differ. The total capacitance in an alternative package can be computed by adding the capacitance shown in the table on page 2 to the parasitic capacitance of the alternative package as defined in the **Package Parasitics** table below. The base part numbers are only available in the case styles shown in the **Package Style Availability** table below. To order, indicate the base part number followed by a dash and the desired package style.

**For example:** The MA4GP030-30 is the MA4GP030 chip in the 30 style package.

**Package Parasitics**

Package Style	Inductance (nH)	Cap. (pF)
30	0.40	0.18
120	0.40	0.13
137	0.40	0.13
276	0.40	0.13
277	N/A (Chip)	N/A (Chip)
1056	0.20	0.20
1393*	See note*	See note*


**Package Style Availability**

Base Part Number	Package Styles
MA4GP022	137, 277
MA4GP030	30, 120, 276, 277, 1056, 1393*

**\*Note:** To order the MA4GP030 chip with flying leads use part number MADP-000030-13930G.


**Note:** Chip with flying leads. Inductance and capacitance will vary according to final lead length after installation.

## Alternative Package Styles

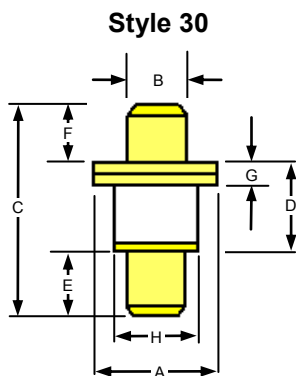

Dimension	Mils	Millimeters
A	121 ± 4	3073 ± 102
B	62 ± 2	1575 ± 51
C	215 ± 10	5461 ± 254
D	91 ± 6	2311 ± 152
E	62 ± 2	1575 ± 51
F	62 ± 2	1575 ± 51
G	20 ± 4	508 ± 102
H	81 ± 2	2057 ± 51


**Style 120**



Dimension	Mils	Millimeters
A	53 ± 2	1346 ± 51
B	45 ± 5	1143 ± 127


## Alternative Package Styles (cont'd)

**Style 137**

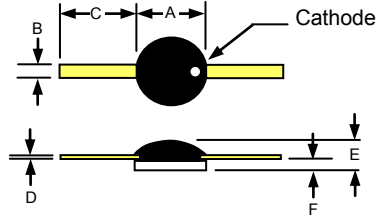


Dimension	mils	mm
A	100 ± 10	2540 ± 254
B	20 ± 2	508 ± 51
C	100 ± 5	2540 ± 127
D	4 ± 1	102 ± 25
E	50 max.	1270 max.
F	14 max.	356 max.

**Style 276**




Dimension	mils	mm
A	15 ± 5	381 ± 127
B	45 ± 5	1143 ± 127
C	5 max.	127 max.
D	53 ± 2	1346 ± 51
E	200 min.	5080 min.
F	20 ± 1	508 ± 25

**Style 1056**

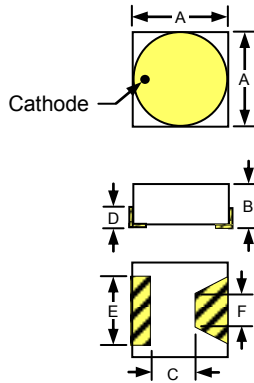

Dimension	mils	mm
A	70 ± 5	1778 ± 127
B	37 ± 4	940 ± 102
C	33 ± 3	838 ± 76
D	15 ± 2	381 ± 51
E	12 ± 2	305 ± 51
F	48 ± 5	1219 ± 127

**Style 1393**

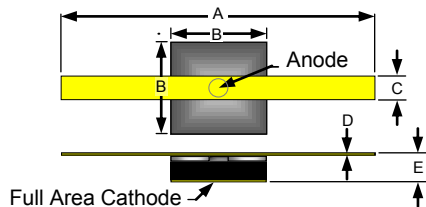

Dimension	mils	mm
A	300 ± 50	7.62 ± 1.27
B	12 ± 1	0.305 ± 0.025
C	5 ± 1	0.127 ± 0.025
D	0.25 ± .05	0.0064 ± 0.0013
E	7 ± 1	0.178 ± 0.025

## Die Handling and Mounting Information

**Handling:** All semiconductor chips should be handled with care to avoid damage or contamination from perspiration, salts, and skin oils. The use of plastic tipped tweezers or vacuum pickups is strongly recommended for individual components. Bulk handling should ensure that abrasion and mechanical shock are minimized.

**Die Attach Surface:** Die can be mounted with an 80Au/Sn20, eutectic solder preform or electrically conductive silver epoxy. The metal RF and D.C. ground plane mounting surface must be free of contamination and should have a surface flatness of  $< \pm 0.002$ ".

**Eutectic Die Attachment Using Hot Gas Die Bonder:** A work surface temperature of 255°C is recommended. When hot forming gas is applied, the work area temperature should be approximately 290°C. The chip should not be exposed to temperatures greater than 320°C for more than 10 seconds.

**Eutectic Die Attachment Using Reflow Oven:** See [Application Note M538 pgs 13&14](#), "Surface Mounting Instructions" at [www.macomtech.com](http://www.macomtech.com) for recommended time-temperature profile.

**Electrically Conductive Epoxy Die Attachment:** A controlled amount of electrically conductive, silver epoxy, approximately 1–2 mils in thickness, should be used to minimize ohmic and thermal resistance. A thin epoxy fillet should be visible around the perimeter of the chip after placement to ensure full area coverage. Cure conductive epoxy per manufacturer's schedule. Typically 150°C for 1 hour.

**Wire and Ribbon Bonding:** It is recommended that thermo-compression or thermo-sonic bonding be used with little or no ultrasonic power. The wire or ribbon used should be smaller than the anode contact diameter. A bonder heat stage temperature setting of 200°C, tool tip temperature of 150°C and a force of 18 to 50 grams is suggested. If ultrasonic scrubbing is necessary, the amplitude should be adjusted to the minimum level required to achieve a good bond. Use of excessive energy may cause the GaAs to fracture and the metallization on the anode to delaminate from the chip.

**For more detailed handling and assembly instructions, see [Application Note M541](#), "Bonding and Handling Procedures for Chip Diode Devices" at [www.macomtech.com](http://www.macomtech.com).**

M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.

7

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [PIN Diodes](#) category:*

*Click to view products by [MACOM](#) manufacturer:*

Other Similar products are found below :

[MA45471](#) [MA4SPS502](#) [APD2220-000](#) [APD0810-000](#) [MA4GP907](#) [MA4L032-186](#) [MA4L401-30](#) [MA4P606-258](#) [MA4P7435NM-1091T](#)  
[MA4PK2000](#) [MA4PK2001](#) [MA4PK2004](#) [MADP-007167-12250T](#) [MADP-030025-13140P](#) [MA4SPS421](#) [MA4PBL027](#) [MA4P404-30](#)  
[MA4AGFCP910](#) [MA4P7101F-1072T](#) [MA4L022-30](#) [MA47047-54](#) [BAR 89-02LRH E6327](#) [UM7108B](#) [UM9701](#) [1SV308,L3F](#) [UM9301SM](#)  
[5082-3077](#) [GC4723-42](#) [MA4L011-1088](#) [MSW2001-200](#) [SMP1321-000](#) [M17X1008](#) [UM4010SM](#) [UM6002B](#) [UM7006A](#) [UM7006B](#)  
[UM7108C](#) [GC4742-42](#) [MADP-000015-000030](#) [MGPN1503-C01A](#) [UMX512](#) [LXP1000-23-2](#) [LXP1004-23-2](#) [MPP4205A-206](#) [MPP4201-206](#)  
[LXP1002-23-0](#) [LXP1004-23-0](#) [MPP4202-206](#) [MPP4205-206](#) [MPC8050-206](#)