


Features

- Excellent Repeatability
(Wafer-to-Wafer and Lot-to-Lot)
- Small Size
- Low Loss, High Q
- Available with Round or Square Bond Pads

Case Style

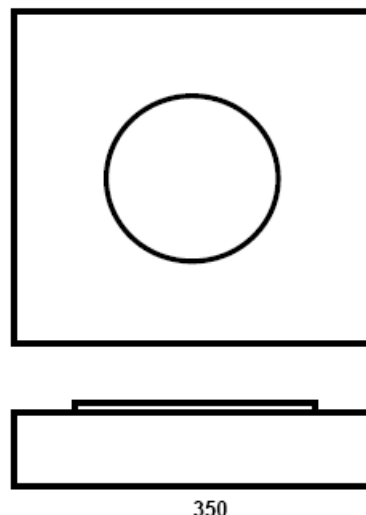

Description and Applications

The 4M series of MNS (metal-nitride-silicon) chip capacitors is designed specifically for high reliability and repeatable performance in microwave circuit applications. These capacitors are made using a low pressure chemical vapor deposition (LPCVD) that results in dense, uniform nitride layers. These devices exhibit higher capacitance per unit area (resulting in smaller chip size) and improved ruggedness over similar MOS, MIS and ceramic capacitors. Evaporated gold contacts are used to provide an easily bondable metal pad on the capacitor chip. M/A-Com MNS capacitors have shown no measurable capacitance change when subjected to the rated standoff voltage at 150 Degrees C.

The MA4M series of chip capacitors is an excellent choice for use in hybrid microwave circuits up through Ku-band, where low loss, high reliability, small size and temperature stability are prime concerns.

These chip capacitors are suited for applications requiring DC blocks, coupling capacitors, bypass capacitors, capacitive loads and tuning elements in oscillators, multipliers and filters.

Comparison of M/A-COM MNS Capacitors to Ceramic Chip Capacitors

Characteristics Compared	MNS	Ceramic
Operating Temperature Range	-55 Deg C. to + 200 Deg. C.	-55 Deg C. to + 200 Deg. C.
Temperature Coefficient	180 PPM	1000 PPM
Insertion Loss of a 20 pf Capacitor in a 50 Ohm Line @ 15 GHz	.1 dB	.2 dB
Chip Size		
200 pF, 100V	40 x 40 mils	70 x 70 mils
20 pF, 100V	22 x 22 mils	50 x 50 mils

Specifications

Chip Capacitors with Round Bonding Pads

Model Number	Capacitance (pF)	Maximum Standoff Voltage Rating (Volts)	Chip Style	Nominal Top Contact Diameter (mils)
MA4M2020	20	200	132	13
MA4M1050	50	100	132	11
MA4M1100	100	100	199	20

Chip Capacitors with Square Bonding Pads

Model Number	Capacitance (pF)	Maximum Standoff Voltage Rating (Volts)	Chip Style
MA4M3010	10	200	350
MA4M3030	30	200	352
MA4M3050	50	200	354
MA4M3100	100	50	358
MA4M3150	150	50	359


Notes :

1. Capacitance is measured @ 1 MHz.
2. Temperature coefficient of capacitance is nominally 180 PPM/Degrees C.
4. Device failure may occur is standoff voltage rating is exceeded.
5. Other capacitance and standoff voltage values are available on request.

Maximum Ratings

Applied Voltage	Specified standoff voltage
Operating Temperature	-55 Deg.C to + 200 Deg. C
Storage Temperature	-55 Deg.C to + 200 Deg. C

TYPICAL CAPACITANCE CHANGE FOR MNS and CERAMIC CAPACITOR vs TEMPERATURE (200 pF CAPACITOR)

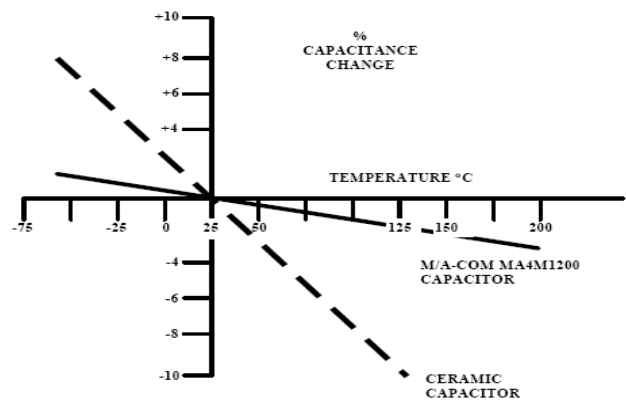


MA4Mxxxx Series



MNS Microwave Chip Capacitors


Rev. V6

Case Style

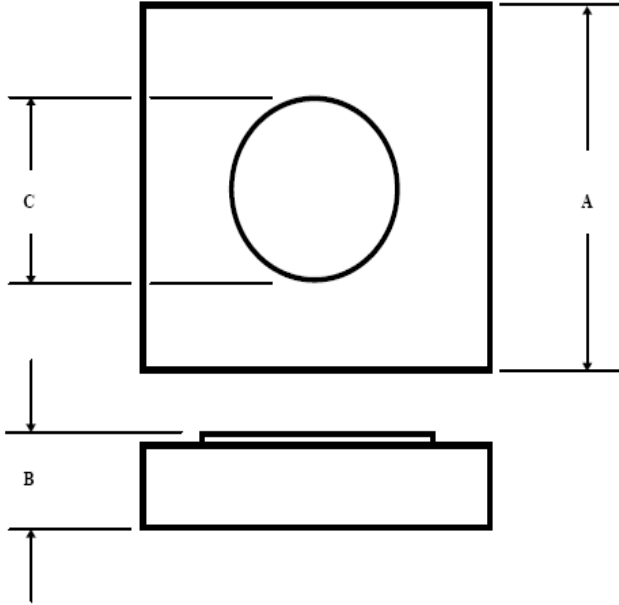

Chip Style	DIM.	INCHES		MILLIMETERS	
		MIN.	MAX.	MIN.	MAX.
132	A	0.020	0.024	0.51	0.61
	B	0.003	0.008	0.08	0.203
199	A	0.027	0.031	0.69	0.79
	B	0.004	0.008	0.10	0.203
200	A	0.037	0.041	0.94	1.04
	B	0.004	0.008	0.10	0.203
201	A	0.047	0.051	1.19	1.30
	B	0.004	0.008	0.10	0.203
263	A	—	0.060	—	1.52
	B	0.004	0.008	0.10	0.203

Note:
For "C" dimension on above case styles, see specifications.

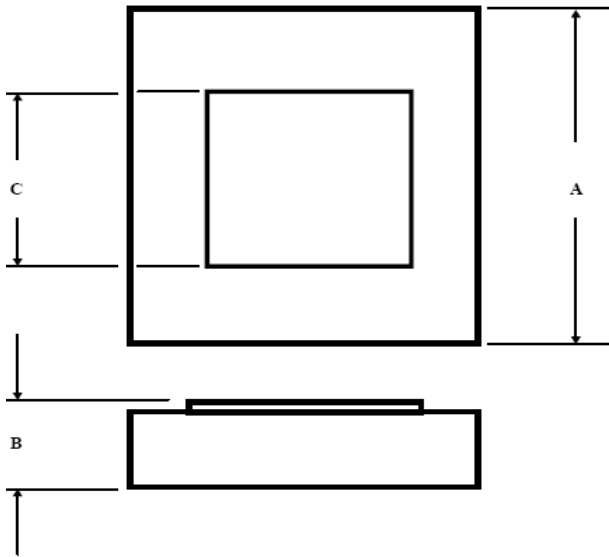

Chip Style	DIM.	INCHES		MILLIMETERS	
		MIN.	MAX.	MIN.	MAX.
350	A	0.018	0.021	0.46	0.53
	B	—	0.008	—	0.203
	C	—	0.009	—	0.23
351	A	0.018	0.021	0.46	0.53
	B	—	0.008	—	0.203
	C	—	0.012	—	0.30
352	A	0.018	0.021	0.46	0.53
	B	—	0.008	—	0.203
	C	—	0.015	—	0.38
354	A	0.020	0.023	0.51	0.58
	B	—	0.008	—	0.203
	C	—	0.018	—	0.46
358	A	0.018	0.021	0.46	0.53
	B	—	0.008	—	0.203
	C	—	0.013	—	0.33
359	A	0.018	0.021	0.46	0.53
	B	—	0.008	—	0.203
	C	—	0.016	—	0.41

Bonding and Handling Considerations for MNS Chip Capacitors

Handling

Normal precautions that are common to the handling of hybrid semiconductors also apply to MNS chip capacitors. Removal of chips from waffle packs and subsequent handling should be done with a vacuum pencil. Pencils equipped with either metallic or nonmetallic tips are acceptable.

Surface Preparation

Each MNS chip and substrate should be free of oils and other surface contamination. Such contaminants may result in poor solder wetting. Cleansing can be done with acetone, alcohol, freon, TMS or other common microelectronic solvents. Bur-nishing of MNS capacitor chips is not necessary or recom-mended.

Solder

Soldering temperatures up to 300°C are acceptable for a duration not greater than 5 seconds for MNS chip capacitors. Any of the common tin-lead-silver, lead-indium, or higher temperature gold alloy solders are acceptable provided that the 300°C temperature is not exceeded. Pure tin or tin-antimony solders are not recommended. Cleaning of residual flux is required and can be accomplished with a fluorinated or chlorinated solvent.

Conductive Epoxy

Any of the conductive epoxies that are available for semicon-ductor die attachment are acceptable for MNS chip capacitor attachment. Follow the manufacturer's recommendations for mixing and application carefully. Take care to seat the capacitor on the substrate using a soft implement.

Lead Bonding

Ball, ultrasonic, TC or pulse bonding of the wire or ribbon leads are all acceptable methods. Temperature for the pulse bonder should not exceed 300°C. Maximum pressure applied to the MNS capacitor chips should not exceed 25 grams for any of the methods used. Proper procedure will result in bond strength that exceeds MIL-STD-883B Method 2011.2 for gold wire or gold ribbon.

Notes :

1. For additional bonding, handling and chip mounting information, reference MACOM application note M541.

M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Silicon RF Capacitors / Thin Film category](#):

Click to view products by [MACOM manufacturer](#):

Other Similar products are found below :

[MA4M3050](#) [MA4M3100](#) [MA4M3010](#) [MV0204CA1R0MQAW](#) [MV0802CA150MAAW](#) [MV0804CA1R0MABW](#) [MV3204CA150MABW](#)
[02013J3R0ABSTR](#) [02015J1R2ABSTR](#) [04021JR05Z4STR\500](#) [400Z0R1AT100T](#) [400Z0R1PT100T](#) [400Z100FT16T](#) [400Z150FT16T](#)
[400Z170FT16T](#) [400Z180FT16T](#) [400Z1R8QT25T](#) [400Z2R0QT25T](#) [400Z2R4QT25T](#) [400Z3R0AT25T](#) [400Z4R7AT25T](#) [400Z5R6BT25T](#)
[400Z8R2BT16T](#) [04023J4R6ABSTR](#) [02013J1R8PBSTR](#) [02015J0R9PBSTR](#) [02015J1R0PBSTR](#) [0201ZK8R2BBWTR](#) [04021JR65PBSTR](#)
[04021J0R4ZBSTR\500](#) [04023J0R6PBSTR\500](#) [04021J1R4PBSTR\500](#) [02011JR25ZBSTR\500](#) [02015J1R5PBSTR\500](#)
[04025J2R2QBWTR\500](#) [06035J2R2QBSTR](#) [06033J6R8BBSTR](#) [04023J5R6ABSTR](#) [100B300GT500XT](#) [100B1R0CT500XT](#)
[02015J2R0PBSTR\500](#) [100B470GT500XT](#) [700B271JT200XT](#) [100B5R1DT500XT](#) [100B0R6DT500XT](#) [100B160FT500XT](#)
[100B3R3DT500XT](#) [100B180FT500XT](#) [100B2R0DT500XT](#) [04021J0R8P4STR\500](#)