



High Q Hyperabrupt Tuning Varactors

MA4ST550 Series

V.2.00

Features

- High Q
- Usable Capacitance Change of 7:1
- Low Reverse Leakage for Good Post Tuning Drift Characteristics
- Reproducible C-V Curves

Description

The MA4ST550 family of high Q Silicon Hyperabrupt Tuning Varactors is available in a series of low parasitic capacitance microwave packages or in chip form. The MA4ST550 series of diodes is available with junction capacitances of approximately 0.8 pF to 8.2 pF at -4 volts. These diodes have capacitance change ratios as high as 7:1.


Applications

The MA4ST550 series is appropriate for use in VCOs with frequencies within the range of approximately 1-14 GHz where a large capacitance change is required. These diodes are suited for VCOs in missile seekers, telecommunication systems and electronic warfare systems with critical post tuning drift specifications.

Environmental Performance

All tuning varactors in ceramic packages are capable of meeting the performance tests dictated by the methods and procedures of the latest revisions of MIL-S-19500, MIL-STD-202 and MIL-STD-750 which specify mechanical, electrical, thermal and other environmental tests common to semiconductor products.

Case Styles



30

31



134

Maximum Ratings

| | |
|-------------------------|---------------------------|
| Reverse Voltage | Same as Breakdown Voltage |
| Operating Temperature | -65°C to +150°C |
| Storage Temperature | -65°C to +200°C |
| Temperature Coefficient | 400 ppm/°C at -4 Volts |

High Q Hyperabrupt Tuning Varactors

MA4ST550 Series

V.2.00

Specifications @ T_A = +25°C

Breakdown Voltage = 22 Volts Minimum @ 10 Microamps

Reverse Current = 50 nAmps Maximum @ 20 Volts and 25°C

| Model Number | Case ¹ Style | Total Capacitance ^{2,3} | | Typical Q - 4 Volts 50 MHz |
|--------------|-------------------------|----------------------------------|------------------------|----------------------------|
| | | @ - 4V (pF) Min./Max. | @ - 20V (pF) Min./Max. | |
| MA4ST551 | 30 | 0.72-0.88 | 0.30-0.38 | 850 |
| MA4ST552 | 30 | 0.90-1.10 | 0.34-0.42 | 650 |
| MA4ST553 | 30 | 1.08-1.32 | 0.38-0.48 | 600 |
| MA4ST554 | 30 | 1.35-1.65 | 0.43-0.58 | 600 |
| MA4ST555 | 30 | 1.62-1.98 | 0.51-0.68 | 550 |
| MA4ST556 | 30 | 1.98-2.42 | 0.58-0.78 | 500 |
| MA4ST557 | 30 | 2.43-2.97 | 0.68-0.88 | 500 |
| MA4ST558 | 30 | 2.97-3.63 | 0.82-1.02 | 500 |
| MA4ST559 | 30 | 3.51-4.29 | 0.93-1.18 | 450 |
| MA4ST560 | 30 | 4.23-5.16 | 1.13-1.43 | 450 |
| MA4ST561 | 30 | 5.04-6.16 | 1.33-1.83 | 450 |
| MA4ST562 | 30 | 6.12-7.48 | 1.58-1.98 | 400 |
| MA4ST563 | 30 | 7.38-9.02 | 1.88-2.38 | 400 |


Notes:

1. The standard case style is 30. Other packages and chips shown at the bottom of this page are available. When ordering, specify the desired case style by adding the case designation as a suffix to the model number, i.e. MA4ST550-134 is a 15 X 15 mil chip diode. See appendix for complete dimensions.

2. Capacitance is measured at 1 MHz.

3. The total capacitance values shown are for devices housed in case style 30. Other case styles will result in different values due to different case parasitics. Case parasitics (C_p and L_g) are given for available case styles along with the outline drawings in the appendix.

Case Styles

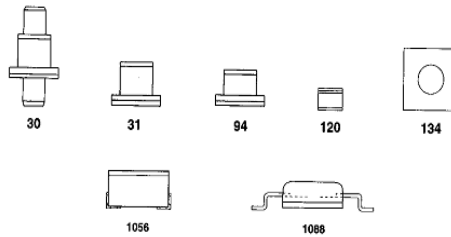

30

31

94

120

134

1056

1088

4-18

Specifications Subject to Change Without Notice.

North America: Tel. (800) 366-2266
Fax (800) 618-8863

Asia/Pacific: Tel. +81 (03) 3226-1671
Fax +81 (03) 3226-1451

Europe: Tel. +44 (1344) 888 595
Fax +44 (1344) 300 020

M/A-COM, Inc.

M/A-COM, Inc.


Specifications Subject to Change Without Notice.

North America: Tel. (800) 366-2266
Fax (800) 618-8863

Asia/Pacific: Tel. +81 (03) 3226-1671
Fax +81 (03) 3226-1451

Europe: Tel. +44 (1344) 888 595
Fax +44 (1344) 300 020

4-19

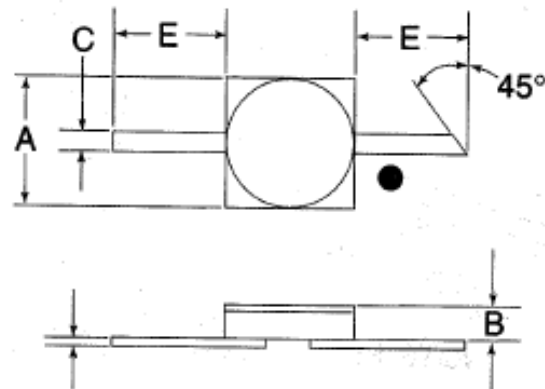

| DIM. | INCHES | | MILLIMETERS | |
|------|--------|-------|-------------|------|
| | MIN. | MAX. | MIN. | MAX. |
| A | 0.094 | 0.102 | 2.39 | 2.59 |
| B | 0.031 | 0.044 | 0.79 | 1.12 |
| C | 0.019 | 0.021 | 0.48 | 0.53 |
| D | 0.003 | 0.006 | 0.076 | 0.15 |
| E | 0.130 | 0.170 | 3.30 | 4.32 |

Notes:

$C_p = 0.15$ pF Typical

$L_s = 0.40$ nH Typical

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [PIN Diodes](#) category:

Click to view products by [MACOM](#) manufacturer:

Other Similar products are found below :

[MA45471](#) [MA4SPS502](#) [APD2220-000](#) [APD0810-000](#) [MA4GP907](#) [MA4L032-186](#) [MA4L401-30](#) [MA4P606-258](#) [MA4P7435NM-1091T](#)
[MA4PK2000](#) [MA4PK2001](#) [MA4PK2004](#) [MADP-007167-12250T](#) [MADP-030025-13140P](#) [MA4SPS421](#) [MA4PBL027](#) [MA4P404-30](#)
[MA4AGFCP910](#) [MA4P7101F-1072T](#) [MA4L022-30](#) [MA47047-54](#) [BAR 89-02LRH E6327](#) [UM7108B](#) [UM9701](#) [1SV308,L3F](#) [UM9301SM](#)
[5082-3077](#) [GC4723-42](#) [MA4L011-1088](#) [MSW2001-200](#) [SMP1321-000](#) [M17X1008](#) [UM4010SM](#) [UM6002B](#) [UM7006A](#) [UM7006B](#)
[UM7108C](#) [GC4742-42](#) [MADP-000015-000030](#) [MGPN1503-C01A](#) [UMX512](#) [LXP1000-23-2](#) [LXP1004-23-2](#) [MPP4205A-206](#) [MPP4201-206](#)
[LXP1002-23-0](#) [LXP1004-23-0](#) [MPP4202-206](#) [MPP4205-206](#) [MPC8050-206](#)