

## Features

- 75  $\Omega$  Input / Output Match
- CTB: -80 dBc
- Noise Figure: 2.7 dB
- Gain: 14.8 dB
- Lead Free SOT-89 Package
- Halogen-Free “Green” Mold Compound
- 260°C Re-flow Compatible
- RoHS\* Compliant Version of MAAMSS0031

## Description

The MAAMSS0041 CATV amplifier is a GaAs MMIC which exhibits low distortion in a lead-free surface mount plastic package. The MAAMSS0041 employs a monolithic single stage design featuring a convenient 75  $\Omega$  input/output impedance that minimizes the number of external components required.

The MAAMSS0041 provides low noise and high linearity. It is ideally suited for set top boxes, home gateways, and other broadband internet based appliances.

The MAAMSS0041 is fabricated using M/A-COM's PHEMT process to realize low noise and low distortion. The process features full passivation for robust performance and reliability.


## Ordering Information<sup>1,2</sup>

| Part Number       | Package                          |
|-------------------|----------------------------------|
| MAAMSS0041        | Lead Free SOT-89 Plastic Package |
| MAAMSS0041TR-3000 | 3000 Piece Tape and Reel         |
| MAAMSS0041SMB     | Sample Test Board                |

1. Reference Application Note M513 for reel size information.
2. All sample boards include 5 loose parts.

\* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

## Functional Schematic

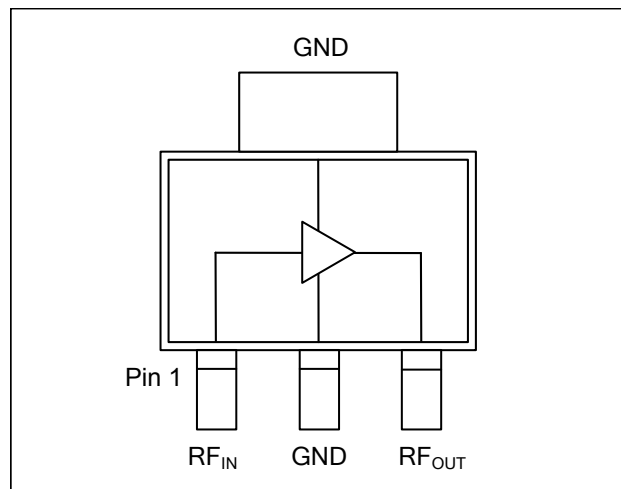

## Pin Configuration

| Pin No. | Pin Name          | Description              |
|---------|-------------------|--------------------------|
| 1       | RF <sub>IN</sub>  | RF Input                 |
| 2       | GND               | Ground                   |
| 3       | RF <sub>OUT</sub> | RF Output / Drain Supply |

## Absolute Maximum Ratings<sup>3,4,5</sup>

| Parameter                         | Absolute Maximum |
|-----------------------------------|------------------|
| RF Input Power                    | 15 dBm           |
| Voltage                           | 10.0 volts       |
| Operating Temperature             | -40°C to +85°C   |
| Junction Temperature <sup>6</sup> | +150°C           |
| Storage Temperature               | -65°C to +150°C  |

3. Exceeding any one or combination of these limits may cause permanent damage to this device.
4. M/A-COM does not recommend sustained operation near these survivability limits.
5. These operating conditions will ensure MTTF > 1 x 10<sup>6</sup> hours.
6. Junction Temperature ( $T_J$ ) =  $T_C + \Theta_{jc} * (V * I)$   
Typical thermal resistance ( $\Theta_{jc}$ ) = 75° C/W.
  - a) For  $T_C = 25^\circ\text{C}$ ,  
 $T_J = 85^\circ\text{C} @ 8\text{ V}, 100\text{ mA}$
  - b) For  $T_C = 85^\circ\text{C}$ ,  
 $T_J = 139^\circ\text{C} @ 8\text{ V}, 90\text{ mA}$


## Broadband CATV Amplifier 50 - 1000 MHz

Rev. V4


Electrical Specifications:  $T_A = 25^\circ\text{C}$ , Freq: 50 - 1000 MHz,  $V_{DD} = +8$  Volts,  $Z_0 = 75 \Omega$

| Parameter                   | Test Conditions                               | Units | Min. | Typ. | Max. |
|-----------------------------|---|-------|------|------|------|
| Gain                        |   | dB    | 14.0 | 14.8 | 16.0 |
| Gain Flatness               |   | dB    | —    | 0.5  | 1.0  |
| Noise Figure                |   | dB    | —    | 2.7  | 3.8  |
| Input Return Loss           |   | dB    | —    | 20   | —    |
| Output Return Loss          |   | dB    | —    | 18   | —    |
| Output IP3                  | 6 MHz Spacing, -10 dBm output per tone        | dBm   | —    | 36   | —    |
| Composite Triple Beat, CTB  | 132 channels, +23 dBmV/channel at the output. | dBc   | —    | -80  | —    |
| Composite Second Order, CSO | 132 channels, +23 dBmV/channel at the output. | dBc   | —    | -70  | —    |
| P1dB                        |   | dBm   | —    | 23   | —    |
| $I_{DD}$                    | + 8 Volts                                     | mA    | —    | 100  | 130  |

### Schematic Including Off-Chip Components

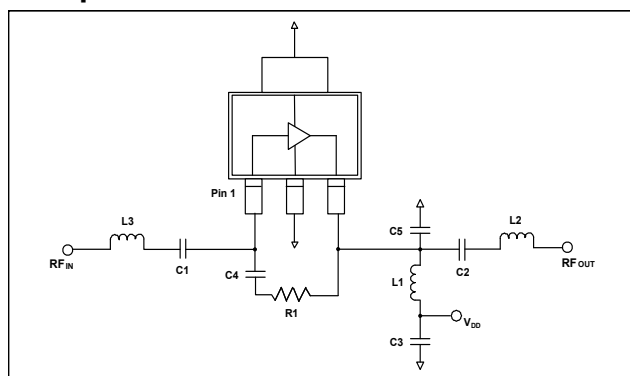

### Recommended Board Layout

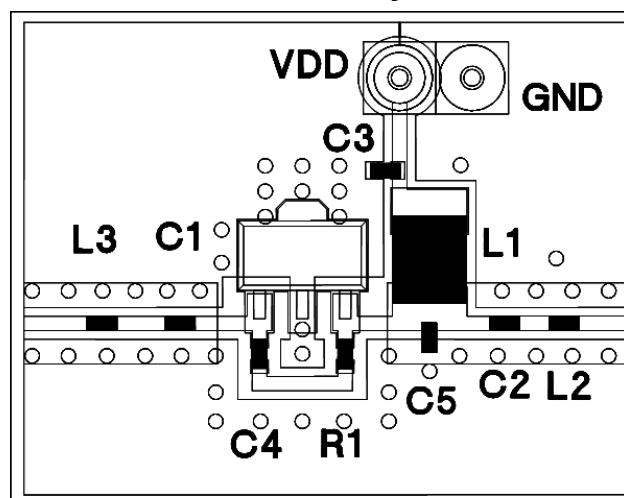


### Off-Chip Component Values

| Component       | Value              | Package |
|-----------------|--------------------|---------|
| C1 - C4         | 0.01 $\mu\text{F}$ | 0402    |
| C5              | 0.5 pF             | 0402    |
| L1 <sup>7</sup> | 1000 nH            | 1210    |
| L2              | 8.2 nH             | 0402    |
| L3              | 5.6 nH             | 0402    |
| R1              | 523 $\Omega$       | 0402    |


7. L1 supplied from EPCOS, part number B82422A1102K100.

## Typical Performance Curves


**Gain vs. Frequency over Temperature to 1 GHz**

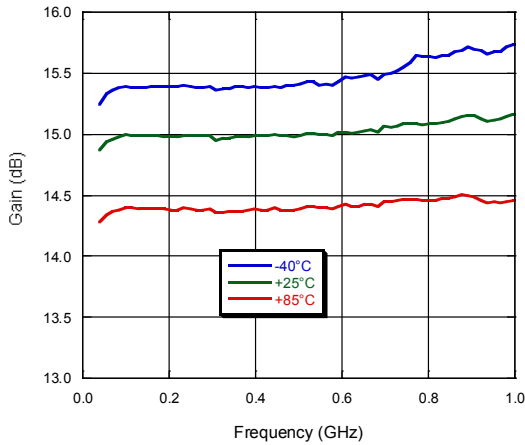


**Gain vs. Frequency over Temperature to 3 GHz**

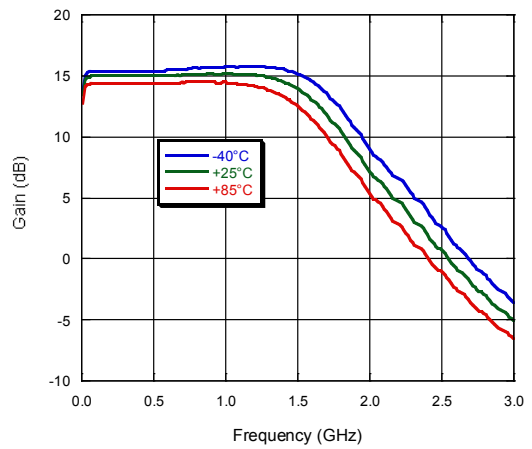


**Input Return Loss vs. Frequency over Temperature**

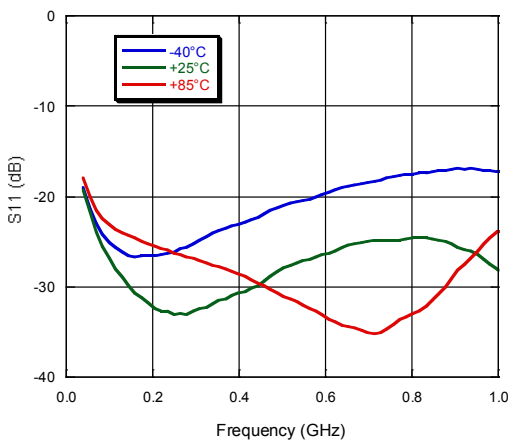


**Output Return Loss vs. Frequency over Temperature**

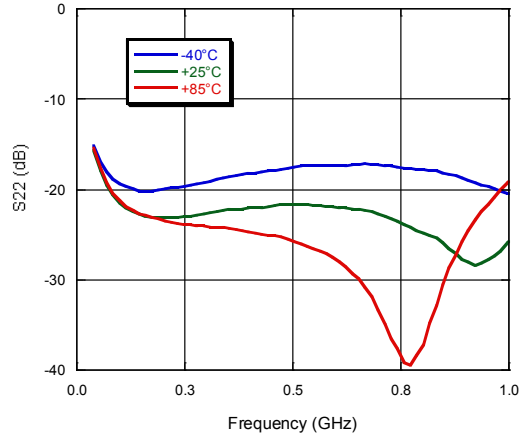

**Noise Figure vs. Frequency**

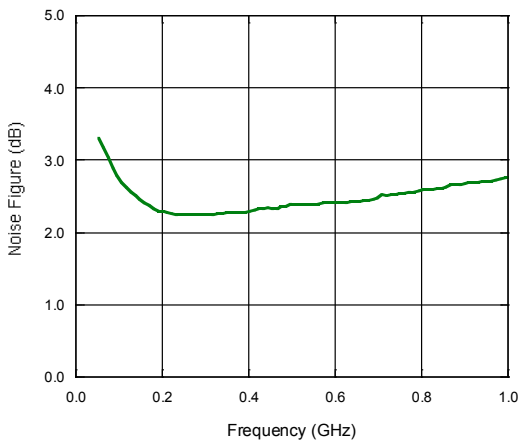

## Lead Free SOT-89 Plastic Package†

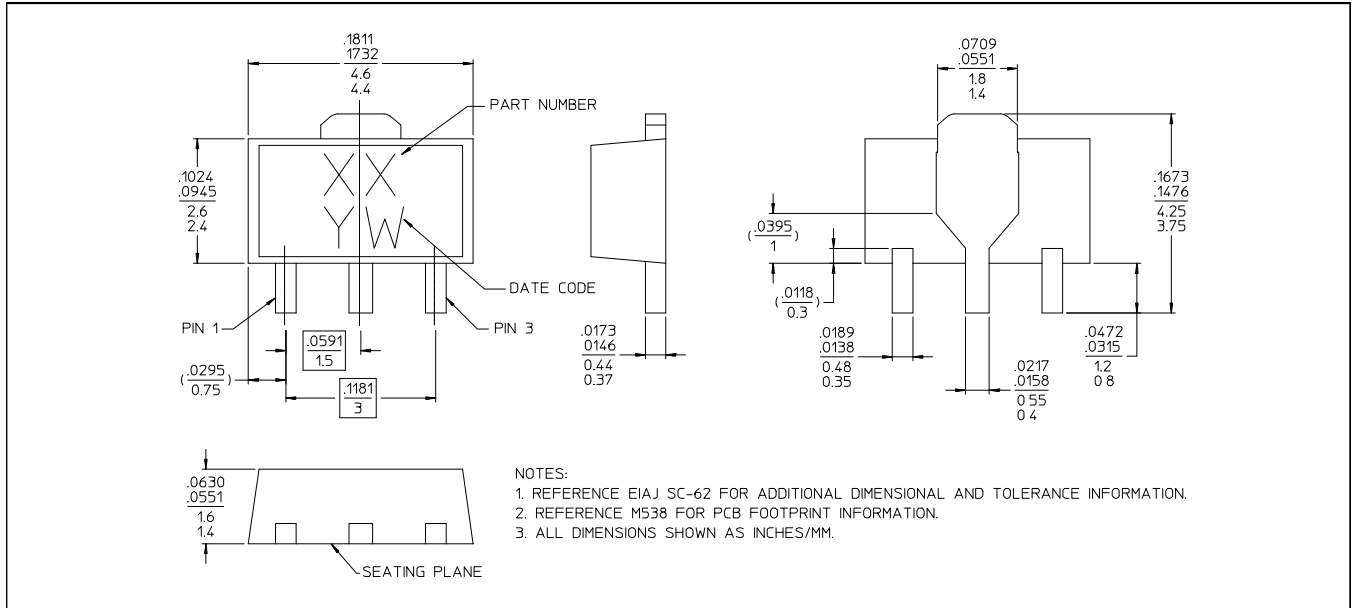

† Reference Application Note M538 for lead-free solder reflow recommendations.  
 Meets JEDEC moisture sensitivity level 1 requirements.  
 Plating is 100% matte tin over copper

### Handling Procedures

Please observe the following precautions to avoid damage:

### Static Sensitivity

Gallium Arsenide Integrated Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.

M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [RF Amplifier](#) category:*

*Click to view products by [MACOM](#) manufacturer:*

Other Similar products are found below :

[A82-1](#) [BGA622H6820XTSA1](#) [BGA 728L7 E6327](#) [BGB719N7ESDE6327XTMA1](#) [HMC397-SX](#) [HMC405](#) [HMC561-SX](#) [HMC8120-SX](#)  
[HMC8121-SX](#) [HMC-ALH382-SX](#) [HMC-ALH476-SX](#) [SE2433T-R](#) [SMA3101-TL-E](#) [SMA39](#) [A66-1](#) [A66-3](#) [A67-1](#) [LX5535LQ](#) [LX5540LL](#)  
[MAAM02350](#) [HMC3653LP3BETR](#) [HMC549MS8GETR](#) [HMC-ALH435-SX](#) [SMA101](#) [SMA32](#) [SMA411](#) [SMA531](#) [SST12LP17E-XX8E](#)  
[SST12LP19E-QX6E](#) [WPM0510A](#) [HMC5929LS6TR](#) [HMC5879LS7TR](#) [HMC1126](#) [HMC1087F10](#) [HMC1086](#) [HMC1016](#) [SMA1212](#)  
[MAX2689EWS+T](#) [MAAMSS0041TR](#) [MAAM37000-A1G](#) [LTC6430AIUF-15#PBF](#) [CHA5115-QDG](#) [SMA70-2](#) [SMA4011](#) [A231](#) [HMC-](#)  
[AUH232](#) [LX5511LQ](#) [LX5511LQ-TR](#) [HMC7441-SX](#) [HMC-ALH310](#)