

17 dB Coupler 5 - 300 MHz



MACP-010507

Rev. V4

Features

- 17 dB Coupling ratio
- Surface Mount Package
- Available on Tape and Reel
- 260° Reflow Compatible
- RoHS Compliant and Lead-Free
- Excellent Temperature Stability
- Can be used on 50 Ω and 75 Ω Systems
- Suitable for all CATV, Broadband and FTTX Applications.


Applications

- CATV Broadband

Description

The MACP-010507 is a 17 dB coupler in a surface mount package. Ideally suited for CATV broadband applications.

Functional Schematic

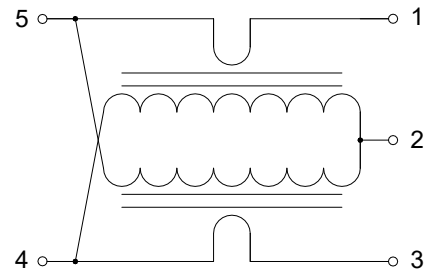

Pin Configuration

Pin #	Function	Pin #	Function
1	Output	4	Coupled
2	Ground	5	Input
3	Isolated		

Electrical Specifications: Freq. = 5 - 300 MHz, $T_A = 25^\circ\text{C}$, $Z_0 = 75 \Omega$, $P_{IN} = 0 \text{ dBm}$

Parameter	Freq. Test Conditions (MHz)	Units	Min.	Typ.	Max.
Coupling Ratio	—	dB	—	17	—
Coupling (Pin 5-4)	5 - 120 120 - 300	dB	16.0 16.5	17 17	18.0 17.5
Coupling Flatness	5 - 120 120 - 300	dB	—	—	0.4 0.2
Main Line Loss (Pin 5-1)	5 - 120 120 - 300	dB	—	0.4 0.4	0.8 0.5
Directivity	5 - 120 120 - 300	dB	16.0 12.5	19 19	—
Input Return Loss (Pin 5)	5 - 120 120 - 300	dB	20 20	31 31	—
Output Return Loss (Pin 1)	5 - 120 120 - 300	dB	20 20	27 27	—
Coupling Return Loss (Pin 4)	5 - 120 120 - 300	dB	20 20	31 31	—

Ordering Information

Part Number	Package
MACP-010507-CH0160	2000 piece reel
MACP-010507-CH01TB	customer test board

Recommended Maximum Ratings

Parameter	Units
Input RF Power	0.5 W
DC Current	500 mA
Operating Temperature	-40°C to +85°C







17 dB Coupler 5 - 300 MHz



MACP-010507

Rev. V4

Typical Performance Curves

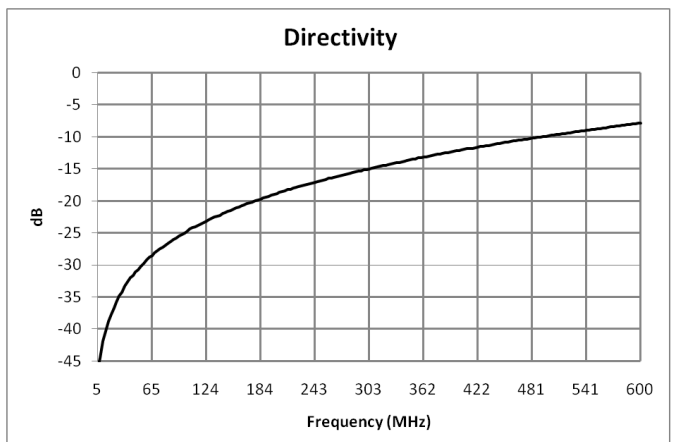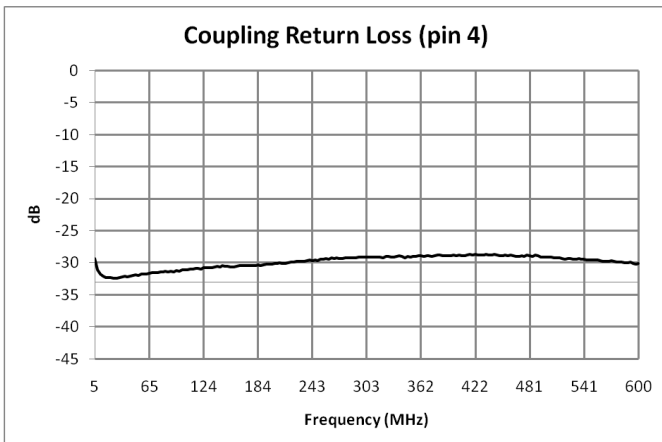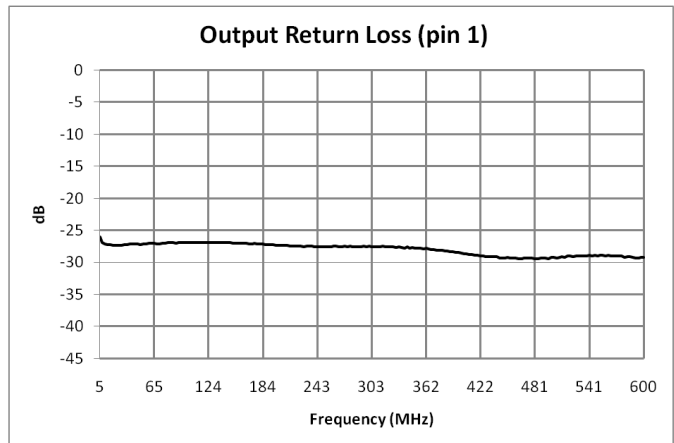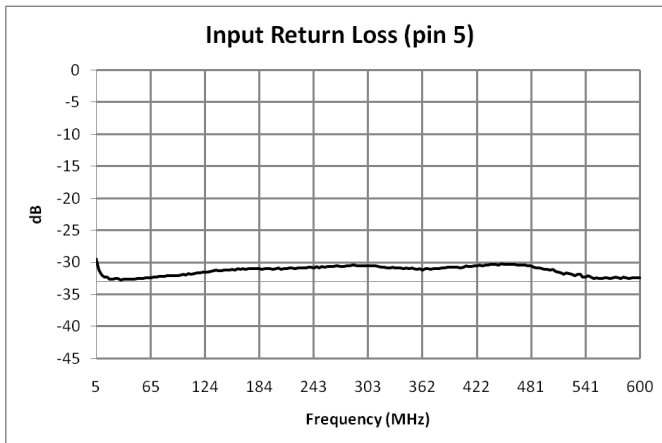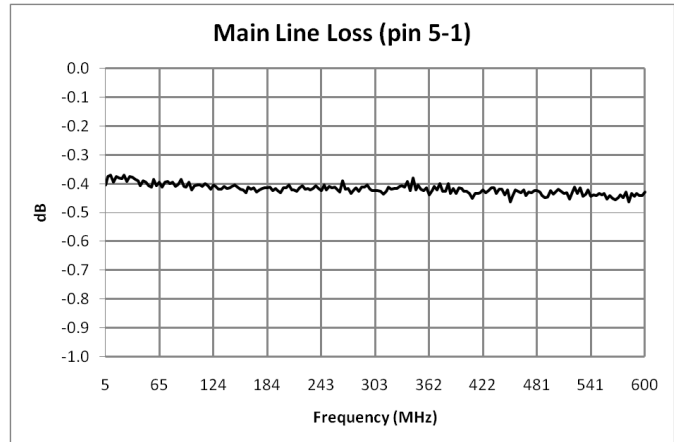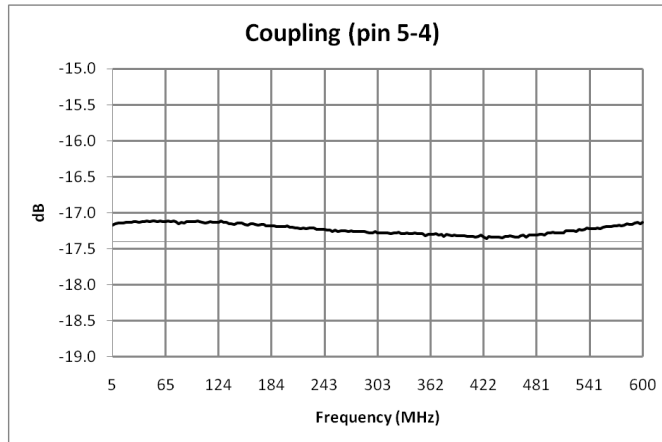


17 dB Coupler 5 - 300 MHz




MACP-010507

Rev. V4


Application Circuit

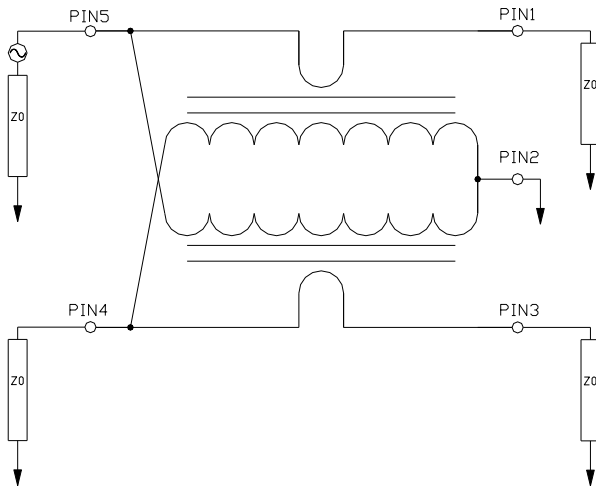

Outline Drawing

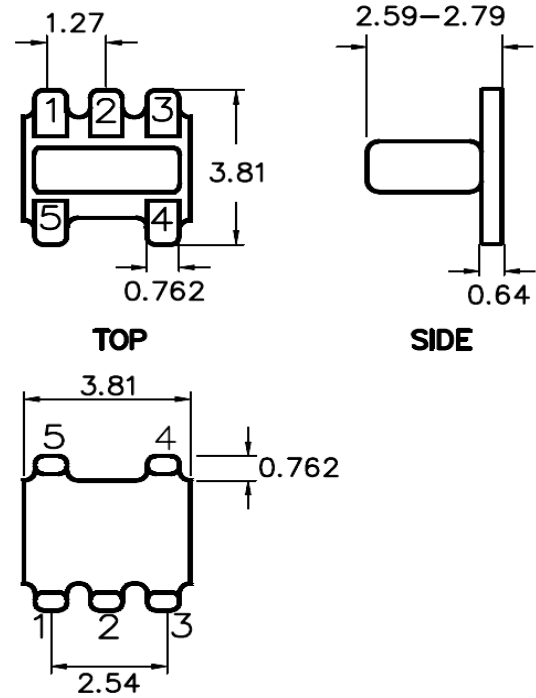

PCB Footprint

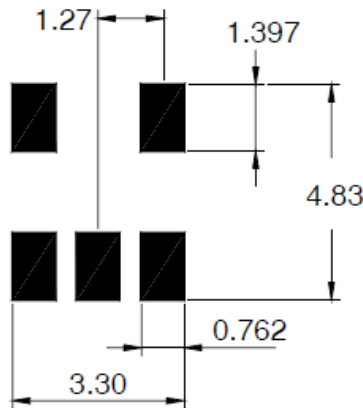

1. Dimensions in mm.
2. Tolerance: ± 0.2 mm unless otherwise noted.
3. Model number and lot code are printed on the reel.
4. Lead plating (CuSn6) Lead finish SAC-305.

Tape & Reel Information

Parameter	Units	Value
Qty per reel	-	2000
Reel Size	mm	330
Tape Width	mm	12.00
Pitch	mm	8.00
Ao	mm	4.00
Bo	mm	4.00
Ko	mm	2.90
Orientation	-	F5
Reference Application Note ANI-019 for orientation		

17 dB Coupler 5 - 300 MHz



MACP-010507

Rev. V4

MACOM Technology Solutions Inc. ("MACOM"). All rights reserved.

These materials are provided in connection with MACOM's products as a service to its customers and may be used for informational purposes only. Except as provided in its Terms and Conditions of Sale or any separate agreement, MACOM assumes no liability or responsibility whatsoever, including for (i) errors or omissions in these materials; (ii) failure to update these materials; or (iii) conflicts or incompatibilities arising from future changes to specifications and product descriptions, which MACOM may make at any time, without notice. These materials grant no license, express or implied, to any intellectual property rights.

THESE MATERIALS ARE PROVIDED "AS IS" WITH NO WARRANTY OR LIABILITY, EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHT, ACCURACY OR COMPLETENESS, OR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning](#) category:

Click to view products by [MACOM](#) manufacturer:

Other Similar products are found below :

[MAPDCC0001](#) [MAPDCC0004](#) [PD0409J5050S2HF](#) [880157](#) [HHS-109-PIN](#) [DC1417J5005AHF](#) [AFS14A30-2185.00-T3](#) [AFS14A35-1591.50-T3](#) [DS-323-PIN](#) [B39321R801H210](#) [1A0220-3](#) [JP510S](#) [LFB212G45SG8C341](#) [LFB322G45SN1A504](#) [LFL182G45TC3B746](#) [SF2159E](#) [30057](#)
[FM-104-PIN](#) [CER0813B](#) [MAPDCC0005](#) [3A325](#) [40287](#) [41180](#) [ATB3225-75032NCT](#) [BD0810N50100AHF](#) [BD2425J50200AHF](#)
[C5060J5003AHF](#) [JHS-115-PIN](#) [JP503AS](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [DC3338J5005AHF](#) [43020](#) [LFB2H2G60BB1C106](#)
[LFL15869MTC1B787](#) [X3C19F1-20S](#) [XC3500P-20S](#) [10013-20](#) [SF2194E](#) [CDBLB455KCAX39-B0](#) [TGL2208-SM, EVAL](#) [RF1353C](#)
[PD0922J5050D2HF](#) [1E1305-3](#) [1G1304-30](#) [B0922J7575AHF](#) [2020-6622-20](#) [TP-102-PIN](#) [TP-103-PIN](#) [BD1222J50200AHF](#)