

## Features


- Surface Mount Package
- 17.3 dB Coupler
- 260°C Reflow Compatible
- RoHS Compliant and Lead Free
- Available on Tape and Reel

## Description

The MACP-011068 is a 17.3 dB coupler offered in a surface mount package.

Ideally suited for 75  $\Omega$  power monitoring in CATV DOCSIS 3.1 nodes and line extenders.

## Functional Schematic



## Pin Configuration<sup>1</sup>

Pin #	Function	Pin #	Function
1	Input	4	External 75 $\Omega$
2	Ground	5	Not Connected
3	Coupled	6	Output

1. MACOM recommends connecting unused package pins to ground.

## Electrical Specifications: Freq. = 5 - 2000 MHz, T<sub>A</sub> = 25°C, Z<sub>0</sub> = 75 $\Omega$ , P<sub>IN</sub> = 0 dBm

Parameter	Frequency Test Conditions (MHz)	Units	Min.	Typ.	Max.
Coupling (pin1-3)	5 - 2000	dB	16.8	17.3	17.8
Main Line Loss (pin 1-6)	5 - 1225 1225 - 1800 1800 - 2000	dB	—	0.6 1.1 1.4	0.7 1.25 1.6
Input Return Loss (pin 1)	5 - 1225 1225 - 1800 1800 - 2000	dB	20 18 16	26 24 20	—
Output Return Loss (pin 6)	5 - 1225 1225 - 1800 1800 - 2000	dB	18 15 14	26 19 17	—
Coupled Return Loss (pin 3)	5 - 1225 1225 - 1800 1800 - 2000	dB	20 20 20	27 25 23	—
Isolation (Pin 1-4)	5 - 1225 1225 - 1800 1800 - 2000	dB	26 21 20	34 26 23	—

## Ordering Information<sup>2,3</sup>

Part Number	Package
MACP-011068	900 piece reel
MACP-011068-TB	Sample Board


- Reference Application Note M513 for reel size information.
- All sample boards include 5 loose parts.

## Absolute Maximum Ratings<sup>4,5</sup>

Parameter	Absolute Maximum
Input Power <sup>6</sup>	2 W
DC Current	500 mA
Operating Temperature	-40°C to +85°C

- Exceeding any one or combination of these limits may cause permanent damage to this device.
- MACOM does not recommend sustained operation near these survivability limits.
- Specified at +25°C only and measured at 800 MHz.


## Application Schematic

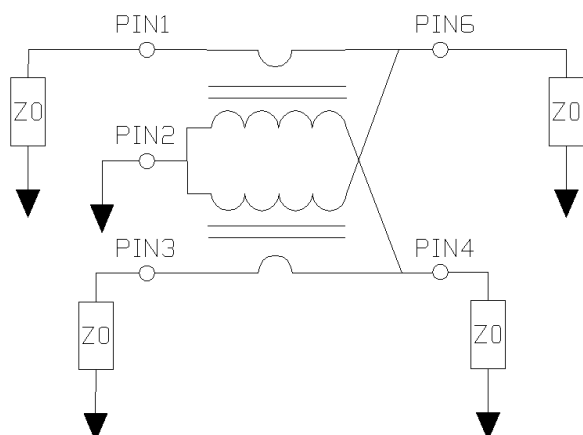


## 17.3 dB Coupler 5 - 2000 MHz

Rev. V2

Electrical Specifications:  $T_A = 25^\circ\text{C}$ ,  $0$   $Z_0 = 75 \Omega$ ,  $P_{in} = 0 \text{ dBm}$

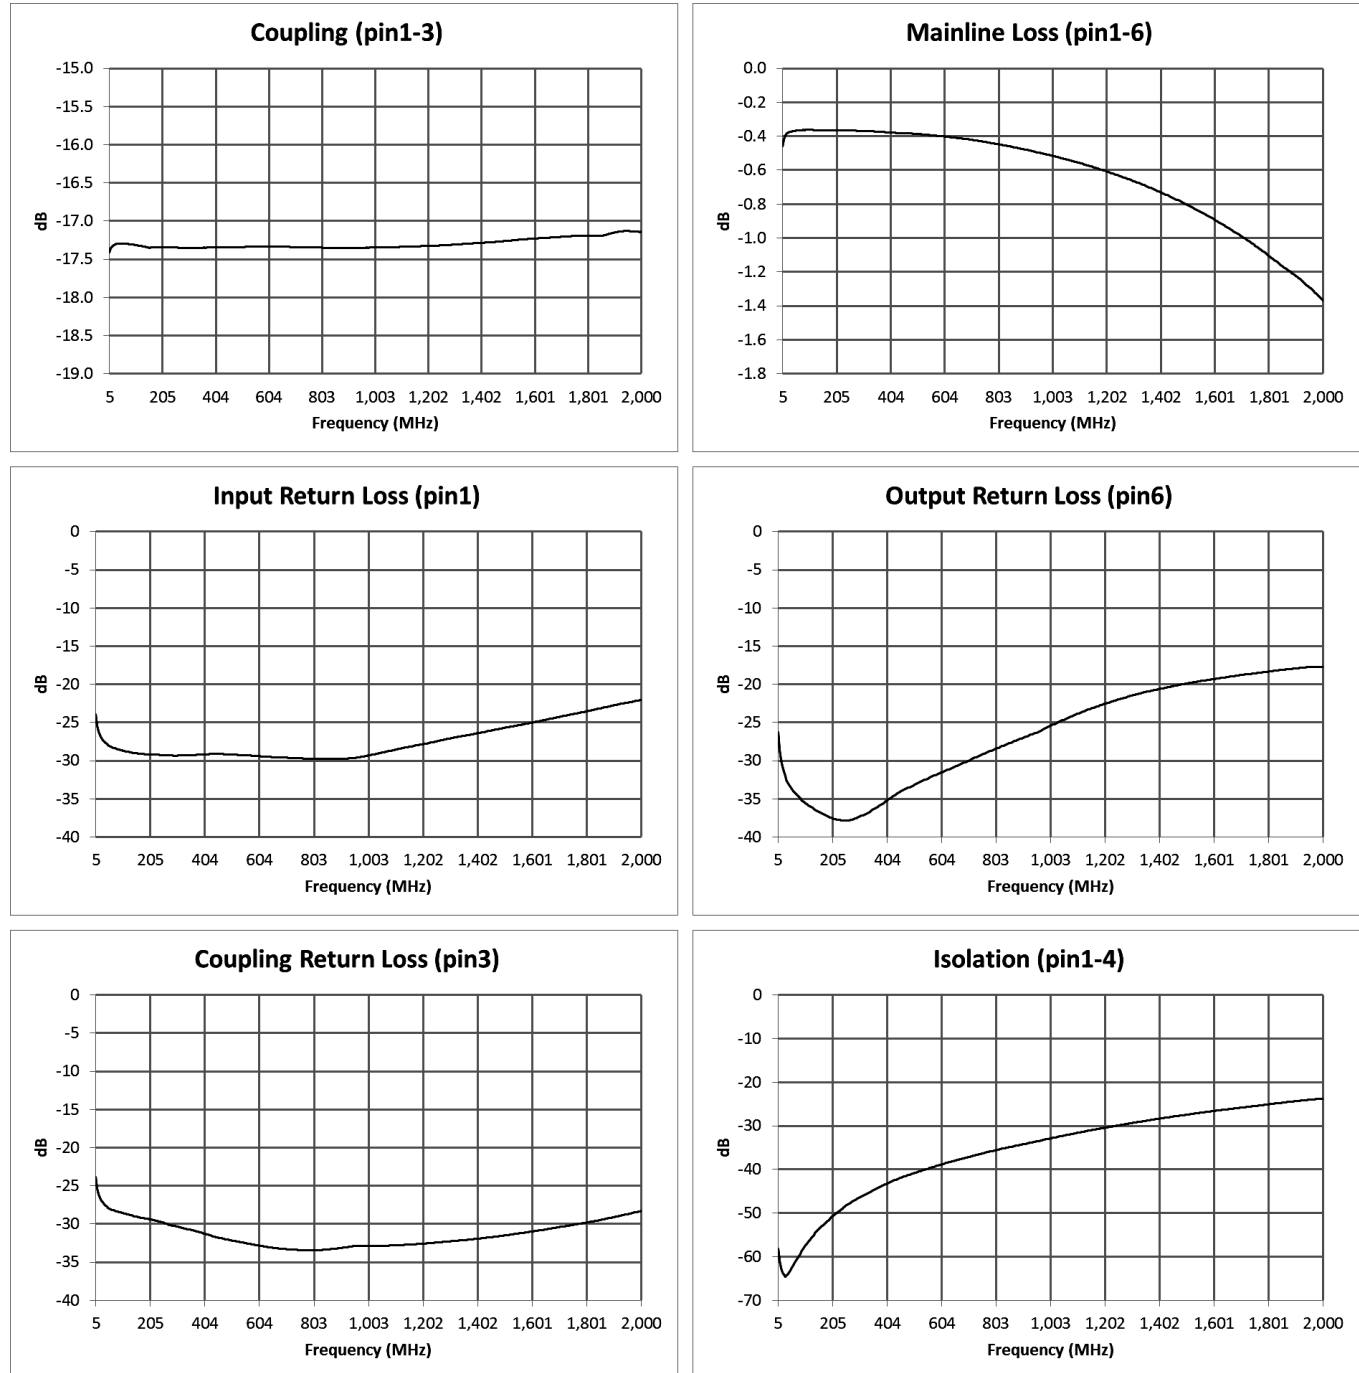


## PCB Layout<sup>7</sup>

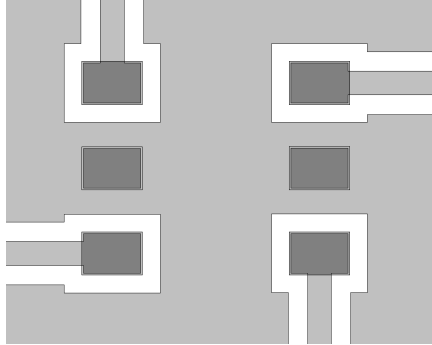


7. Recommended PCB layout shown above uses 1.6 mm FR4, Grounded coplanar wave guide, transmission line width 0.70 mm and gap 0.57 mm.

## Outline Drawing<sup>8,9,10,11</sup>

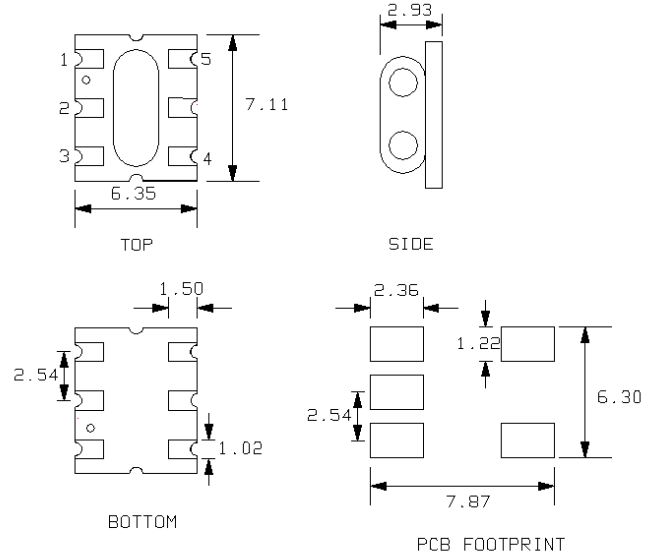

8. Dimensions in mm.  
 9. Tolerance:  $\pm 0.2$  mm unless otherwise noted.  
 10. Model number and lot code are printed on the reel.  
 11. Finish: Electroless nickel immersion gold (ENIG).

## Carrier Tape Orientation

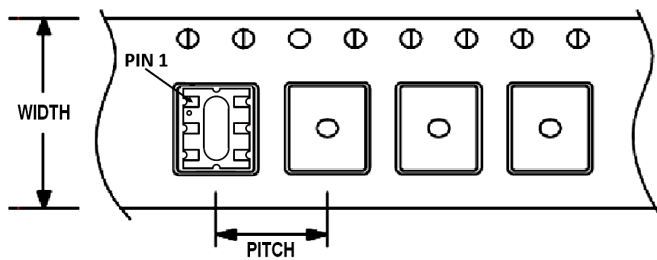

## Tape & Reel Information

Parameter	Units	Value
Qty per reel	-	900
Reel Size	mm	330
Tape Width	mm	16.0
Pitch	mm	12.0
Orientation	-	F15
Reference Application Note ANI-019 for orientation		

MACOM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with MACOM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppels or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Signal Conditioning](#) category:*

*Click to view products by [MACOM](#) manufacturer:*

Other Similar products are found below :

[MAPDCC0001](#) [MAPDCC0004](#) [PD0409J5050S2HF](#) [880157](#) [HHS-109-PIN](#) [DC1417J5005AHF](#) [AFS14A30-2185.00-T3](#) [AFS14A35-1591.50-T3](#) [DS-323-PIN](#) [B39321R801H210](#) [1A0220-3](#) [JP510S](#) [LFB212G45SG8C341](#) [LFB322G45SN1A504](#) [LFL182G45TC3B746](#) [SF2159E](#) [30057](#) [FM-104-PIN](#) [CER0813B](#) [MAPDCC0005](#) [3A325](#) [40287](#) [41180](#) [ATB3225-75032NCT](#) [BD0810N50100AHF](#) [BD2425J50200AHF](#) [C5060J5003AHF](#) [JHS-115-PIN](#) [JP503AS](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [DC3338J5005AHF](#) [43020](#) [LFB2H2G60BB1C106](#) [LFL15869MTC1B787](#) [X3C19F1-20S](#) [XC3500P-20S](#) [10013-20](#) [SF2194E](#) [CDBLB455KCAX39-B0](#) [TGL2208-SM, EVAL](#) [RF1353C](#) [PD0922J5050D2HF](#) [1E1305-3](#) [1G1304-30](#) [B0922J7575AHF](#) [2020-6622-20](#) [TP-102-PIN](#) [TP-103-PIN](#) [BD1222J50200AHF](#)