

Ka-Band High Power Reflective SPDT PIN Switch 26 - 40 GHz



MASW-011098

Rev. V3

Features

- Low Loss: 1.1 dB @ 40 GHz
- High Isolation: 39 dB @ 40 GHz
- Up to 13 W CW Power Handling, +85°C
- Switching Speed <30 ns
- Integrated DC Blocks and RF Bias Networks
- 5 mm 20-lead Laminate Package
- RoHS* Compliant

Applications

- 5G Wireless Infrastructure

Description

The MASW-011098 is a high power SPDT PIN diode switch in a 5 mm laminate package. This broadband, reflective, high linearity, switch was developed for 26 - 40 GHz applications that require up to 13 W of power handling while maintaining low insertion loss and high isolation.

The SPDT MMIC utilizes MACOM's proven AlGaAs PIN diode technology.


This switch is ideally suited for 5G, Point-to-Point communications systems, radar systems, radiometers, test and instrumentation equipment and other high frequency applications.

Ordering Information¹

Part Number	Package
MASW-011098	Bulk Packaged part
MASW-011098-TR0500	500 Part Reel
MASW-011098-001SMB	Sample Board

1. Reference Application Note M513 for reel size information.

Functional Diagram

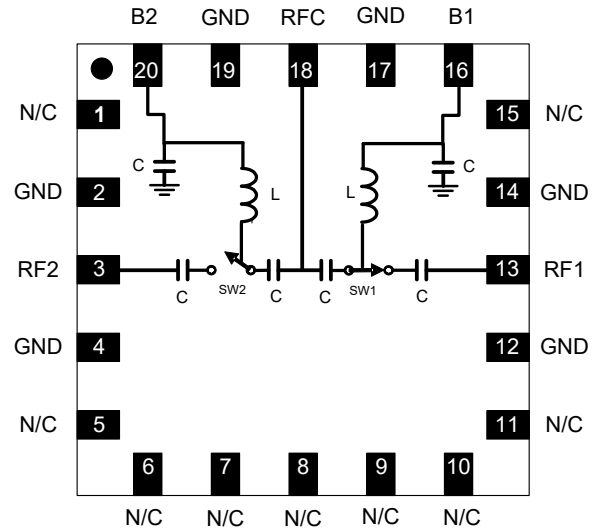

Pin Configuration^{2,3}

Pin #	Pin Name	Function
1, 5 - 11, 15	N/C	No Connection
2, 4, 12, 14, 17, 19	GND	Ground
3	RF2	RF2
13	RF1	RF1
16	B1	Bias 1
18	RFC	RF _{COMMON}
20	B2	Bias 2

2. MACOM recommends connecting all no connection pins to ground.
3. The exposed pad centered on the package bottom must be connected to RF, DC and thermal ground.

* Restrictions on Hazardous Substances, compliant to current RoHS EU directive.

Ka-Band High Power Reflective SPDT PIN Switch

26 - 40 GHz



MASW-011098

Rev. V3

Electrical Specifications: $T_A = +25^\circ\text{C}$, $I_F^4 = 20 \text{ mA}$, $V_R^5 = -15 \text{ V}$, $Z_0 = 50 \Omega$

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Insertion Loss (RF _{COMMON} to RFx ON state)	26.0 GHz	dB	—	0.85	1.3
	30.0 GHz			0.85	1.5
	38.5 GHz			1.05	1.7
	40.0 GHz			1.15	1.8
Isolation (RF _{COMMON} to RFx OFF state) ⁶	26.0 GHz	dB	30	43	—
	30.0 GHz		29	40	
	38.5 GHz		29	38	
	40.0 GHz		27	39	
Return Loss (RF _{COMMON})	26.0 GHz	dB	—	20	—
	30.0 GHz			21	
	38.5 GHz			23	
	40.0 GHz			19	
Return Loss (RFx ON state)	26.0 GHz	dB	—	24	—
	30.0 GHz			24	
	38.5 GHz			27	
	40.0 GHz			25	
CW Power Handling (ON state) ⁵	26.5 GHz, $V_R = -25 \text{ V}$, $+85^\circ\text{C}$	dBm W	—	41.2 13	—
Switching Speed T_{ON} / T_{OFF} T_{RISE} / T_{FALL}	26.5 GHz	ns	—	30 / 21	—
	50% DC to 90% RF / 50% DC to 10% RF 10% to 90% RF / 90% to 10% RF			10 / 8	
Reverse Bias Current	-15 V	nA	—	25	—

- Forward bias current (I_F) is set using external bias resistors (R_{BIAS}) placed at pins B1 and B2, where $R_{BIAS} = (V_{CC} - 1.32 \text{ V}) / I_F$.
- Reverse bias voltage should be determined based on working conditions. For example, -25 V @ 41.2 dBm input power. For lower power applications, a less negative voltage can be used. R. Caverly and G. Hiller, "Establishing the Minimum Reverse Bias for a PIN Diode in a High Power Switch," IEEE Transactions on Microwave Theory and Techniques, Vol.38, No.12, December 1990.
- Isolation defined with 1 port in low loss state.

Absolute Maximum Ratings^{7,8}

Parameter	Absolute Maximum
Reverse Bias Voltage	-50 V
Forward Bias Current	25 mA
CW Incident Power	43 dBm @ 85°C
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +150°C

- Exceeding any one or combination of these limits may cause permanent damage to this device.
- MACOM does not recommend sustained operation near these survivability limits.

Truth Table

RF _{COMMON} Path	Bias 1	Bias 2
RF1 Insertion Loss RF2 Isolation	-15 V	20 mA
RF2 Insertion Loss RF1 Isolation	20 mA	-15 V

Ka-Band High Power Reflective SPDT PIN Switch 26 - 40 GHz




MASW-011098


Rev. V3

Typical Performance Curves


Insertion Loss over Reverse Bias Voltage

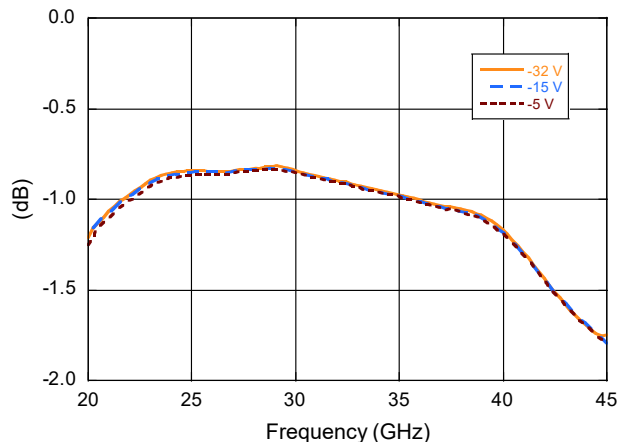


Insertion Loss over Temperature

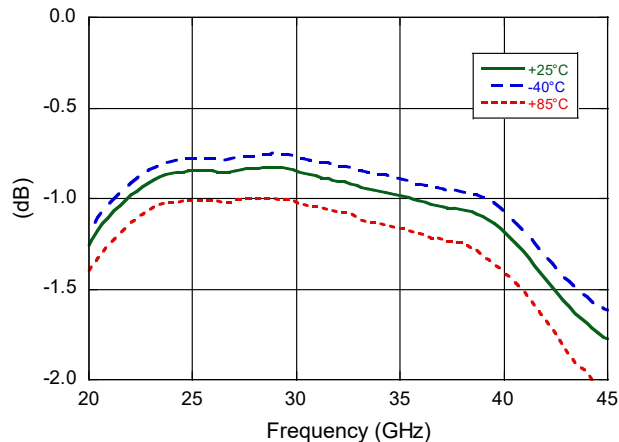


RF_{COMMON} Return Loss

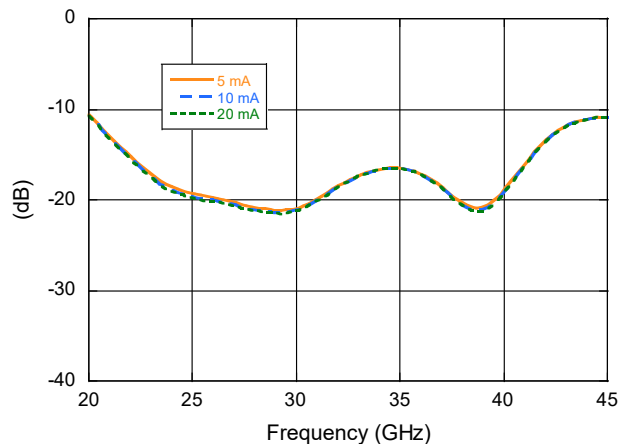


Isolation over Forward Bias Current

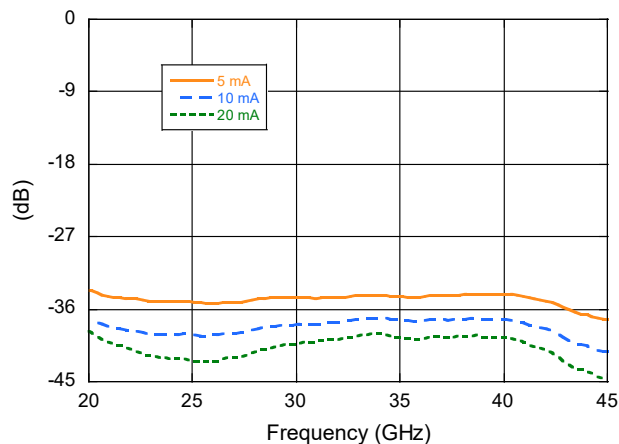

RF₁, RF₂ Return Loss (Insertion Loss State)

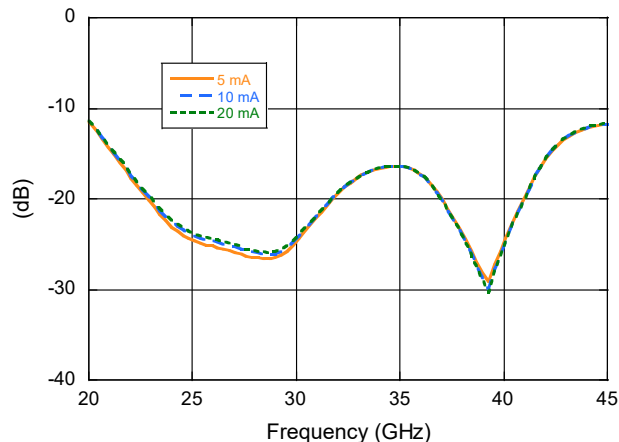

Compression vs. Reverse Bias Voltage @ 26.5 GHz

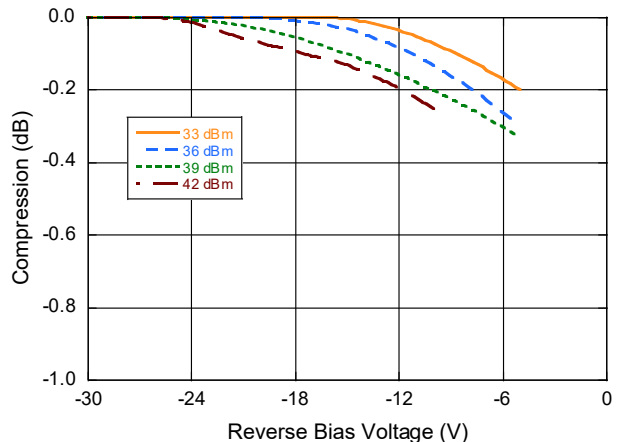


Ka-Band High Power Reflective SPDT PIN Switch 26 - 40 GHz



MASW-011098

Rev. V3

MASW-011098 with MADR-011020 Driver Application Schematic

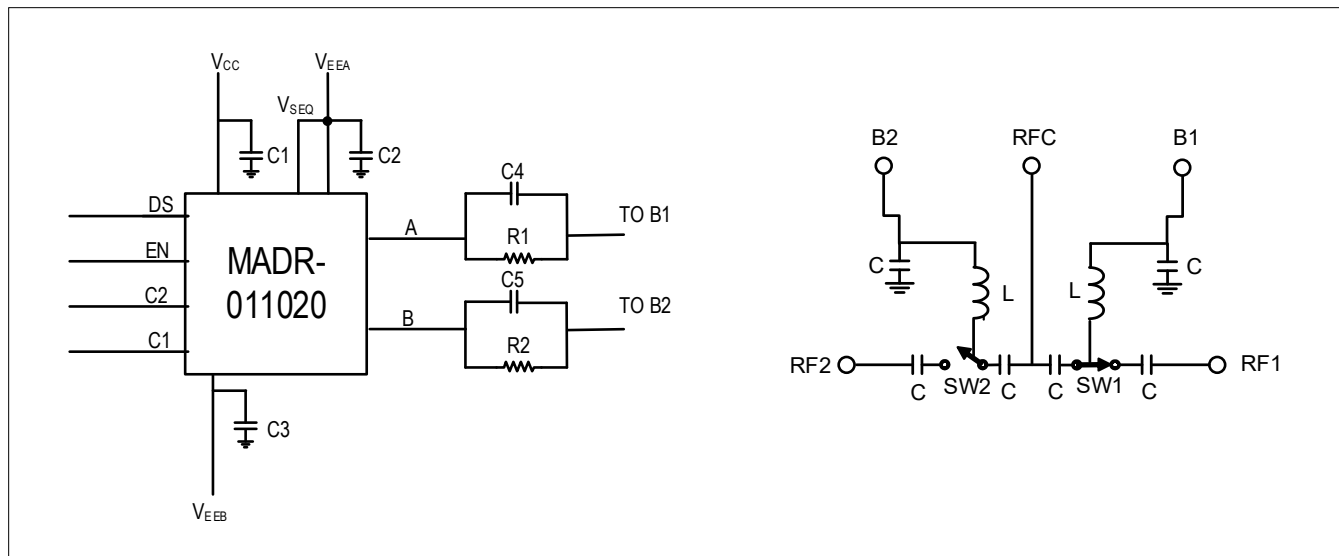

Parts List⁹

Part	Value
C1,C3	0.1 μ F
C2	47 pF
C4,C5	470 pF
R1,R2	180 Ω

9. Resistor values calculated to provide ~20 mA of bias current and ~25 V reverse bias voltage given $V_{CC} = 5$ V, $V_{EEB} = -25$ V, voltage drop at driver output ~0.4 V and V_f of switch diodes ~1.32 V.

Switch Minimum Reverse Bias Voltage^{5,10}

Frequency (GHz)	DC Voltage (V) B1 & B2
26	-16
30	-14
35	-12
40	-11

10. Calculated (see note 5) minimum DC reverse bias voltage to maintain low loss under 13 W of power with 1.5:1 VSWR.

Handling Procedures

Please observe the following precautions to avoid damage:

Static Sensitivity

Gallium Arsenide Integrated Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these HBM class 1A devices.


Ka-Band High Power Reflective SPDT PIN Switch 26 - 40 GHz



MASW-011098

Rev. V3

Lead-Free 5 mm 20-Lead Laminate Package[†]

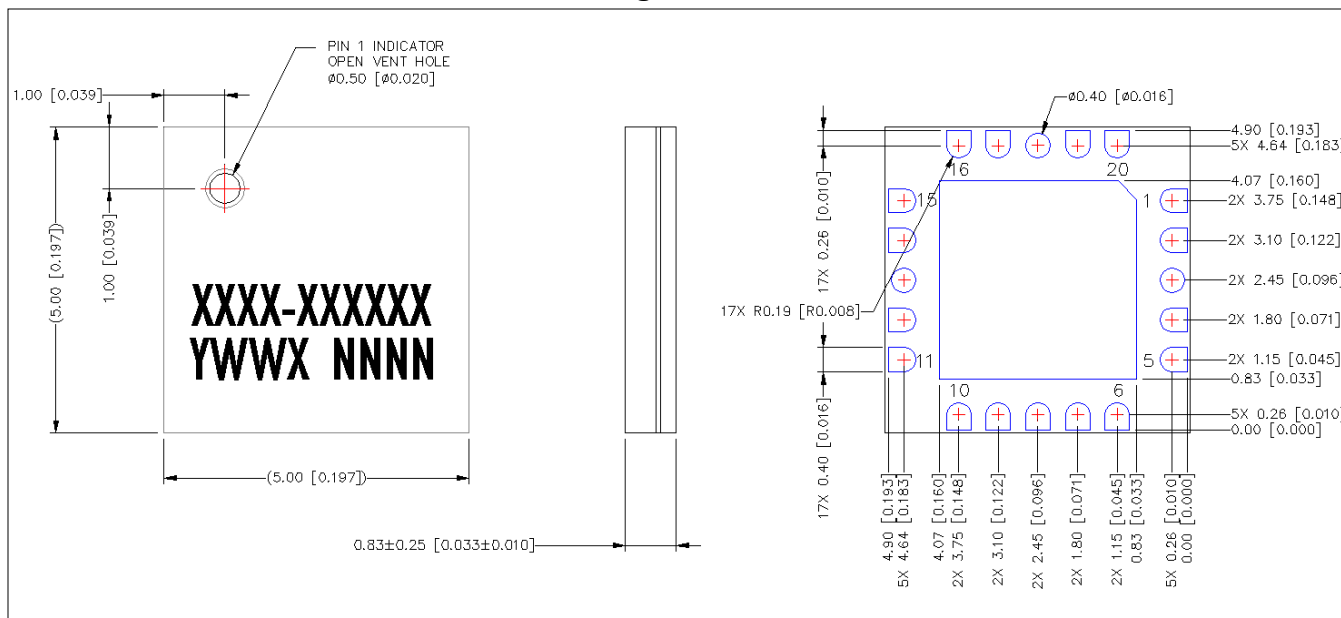


[†] All dimensions are in millimeters [inches].

Plating is gold.

This device is non-hermetic with an open vent hole. MACOM does not recommend performing any aqueous cleaning process post-assembly unless the vent hole has been filled post-reflow.

Recommended PCB Land Pattern and PCB construction (Material : RO4350B LoPro, Dielectric thickness 10.7 mils ,Top Metal thickness 1oz. Cu)

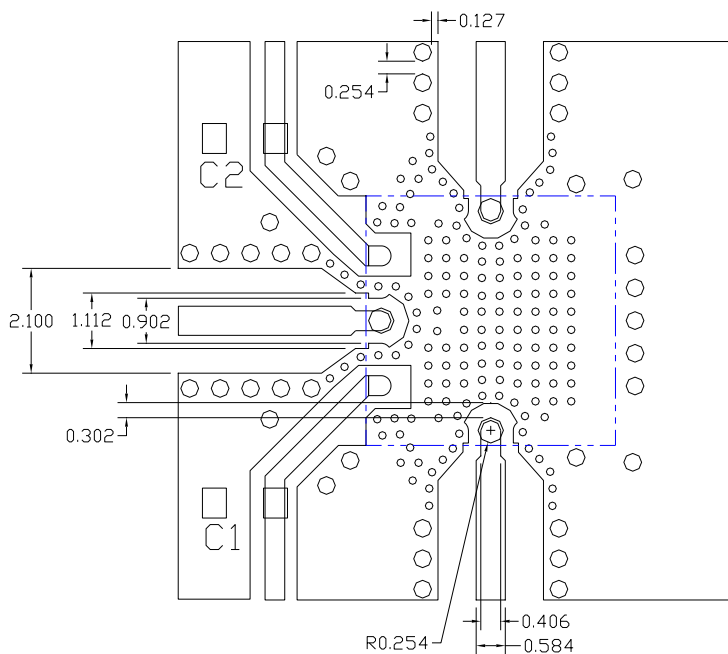

Ka-Band High Power Reflective SPDT PIN Switch

26 - 40 GHz



MASW-011098

Rev. V3

MACOM Technology Solutions Inc. ("MACOM"). All rights reserved.

These materials are provided in connection with MACOM's products as a service to its customers and may be used for informational purposes only. Except as provided in its Terms and Conditions of Sale or any separate agreement, MACOM assumes no liability or responsibility whatsoever, including for (i) errors or omissions in these materials; (ii) failure to update these materials; or (iii) conflicts or incompatibilities arising from future changes to specifications and product descriptions, which MACOM may make at any time, without notice. These materials grant no license, express or implied, to any intellectual property rights.

THESE MATERIALS ARE PROVIDED "AS IS" WITH NO WARRANTY OR LIABILITY, EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHT, ACCURACY OR COMPLETENESS, OR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Switch ICs](#) category:

Click to view products by [MACOM](#) manufacturer:

Other Similar products are found below :

[MASW-008853-TR3000](#) [BGS13SN8E6327XTSA1](#) [BGSX210MA18E6327XTSA1](#) [SKY13446-374LF](#) [SW-227-PIN](#) [CG2185X2](#) [CG2415M6](#)
[MA4AGSW5](#) [MA4SW410](#) [MA4SW410B-1](#) [MASW-002102-13580G](#) [MASW-008543-001SMB](#) [MASW-008955-TR3000](#) [TGS4307](#)
[BGS1414MN20E6327XTSA1](#) [BGS1515MN20E6327XTSA1](#) [BGSA11GN10E6327XTSA1](#) [BGSX28MA18E6327XTSA1](#) [HMC199AMS8](#)
[HMC986A](#) [SKY13374-397LF](#) [SKY13453-385LF](#) [CG2415M6-C2](#) [HMC986A-SX](#) [SW-314-PIN](#) [UPG2162T5N-E2-A](#) [SKY13416-485LF](#)
[MASWSS0204TR-3000](#) [MASWSS0201TR](#) [MASWSS0181TR-3000](#) [MASW-007588-TR3000](#) [MASW-004103-13655P](#) [MASW-003102-](#)
[13590G](#) [MASWSS0202TR-3000](#) [MA4SW310B-1](#) [MA4SW310](#) [MA4SW110](#) [SW-313-PIN](#) [SKY13321-360LF](#) [SKY13405-490LF](#) [BGSF](#)
[18DM20 E6327](#) [MMS008PP3](#) [BGS13PN10E6327XTSA1](#) [SKY13319-374LF](#) [BGS14PN10E6327XTSA1](#) [SKY12213-478LF](#) [SKY13404-](#)
[466LF](#) [MASW-011060-TR0500](#) [SKYA21024](#) [SKY85601-11](#)