



Features

- Small Size (50 x 30 mils)
- Broadband Performance up to 6 GHz
- Supports up to 4 W Power when Cold Switched
- Low Insertion Loss: 0.5 dB
- RoHS* Compliant



Description

The MSWSE-005-15 is a PIN diode SPST switch element designed for medium incident power applications up to 4 W CW. It has low insertion loss and medium isolation below 6 GHz.

Electrical Specifications: $T_A = +25^\circ\text{C}$

Parameter	Test Conditions	Min.	Typ.	Max.	Units
Breakdown Voltage	$I_R = 10 \mu\text{A}$	200	—	—	V
Forward Voltage	$I_F = 50 \text{ mA}$	—	980	1050	mV
Junction Capacitance	$V_R = 50 \text{ V}, 1 \text{ MHz}$	—	0.035	0.05	pF
Total Capacitance	$V_R = 50 \text{ V}, 1 \text{ MHz}$	—	0.11	0.15	pF
Series Resistance	$I_F = 30 \text{ mA}, 500 \text{ MHz}$ $I_F = 100 \text{ mA}, 500 \text{ MHz}$	—	2.0 1.4	2.5 1.8	Ω
Lifetime	$I_F = 10 \text{ mA}, I_R = 6 \text{ mA}, 50\%$	—	180	300	ns
Insertion Loss	$I_F = 50 \text{ mA}, <2.7 \text{ GHz}$ $I_F = 50 \text{ mA}, <6.0 \text{ GHz}$	—	0.25 0.50	0.4 —	dB
Isolation	$V_R = 50 \text{ V}, <2.7 \text{ GHz}$ $V_R = 50 \text{ V}, <6.0 \text{ GHz}$	13 —	16 10	—	dB
I-Layer	—	—	15	—	μm

Silicon PIN Diode Switch Element

Rev. V1


Absolute Maximum Ratings^{1,2}

Parameter	Absolute Maximum
Breakdown Voltage	200 V
Forward Current	200 mA
Thermal Resistance	50°C/W
Junction Temperature	+175°C
Storage Temperature	-55°C to +150°C
Solder Temperature	+260°C per JEDEC STD-J-20C

1. Exceeding any one or combination of these limits may cause permanent damage to this device.
2. MACOM does not recommend sustained operation near these survivability limits.


Junction Temperature vs. Input Power

1.3 GHz, $T_A = 25^\circ\text{C}$, PCB Mounted on Heat Sink

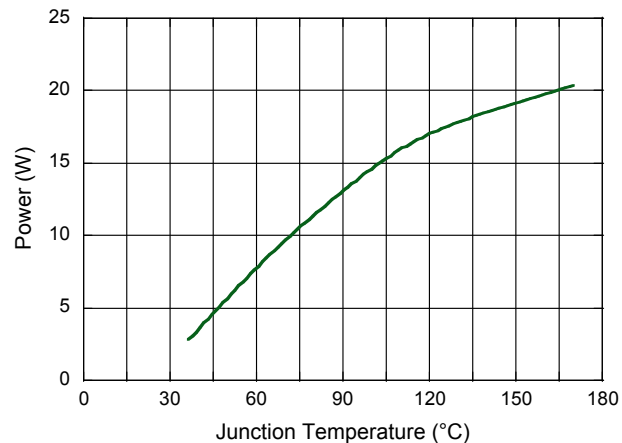


Typical RF Performance Curves @ +25°C


Insertion Loss

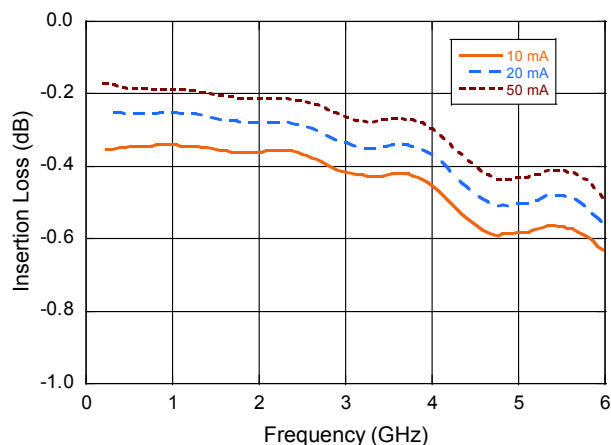


Isolation

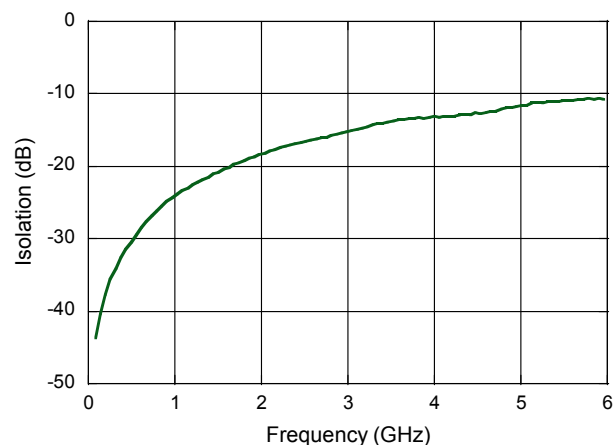


Input Return Loss

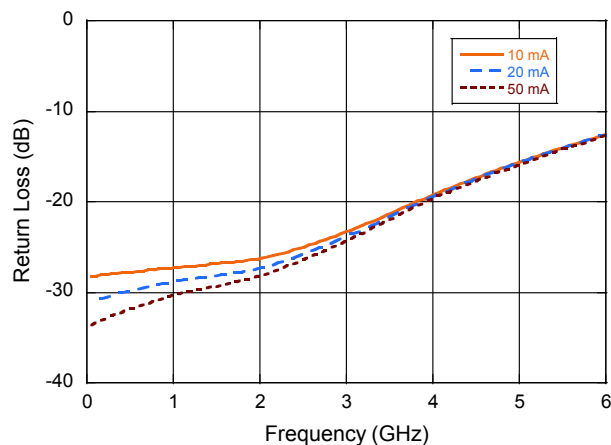


Series Resistance vs. Current, 500 MHz

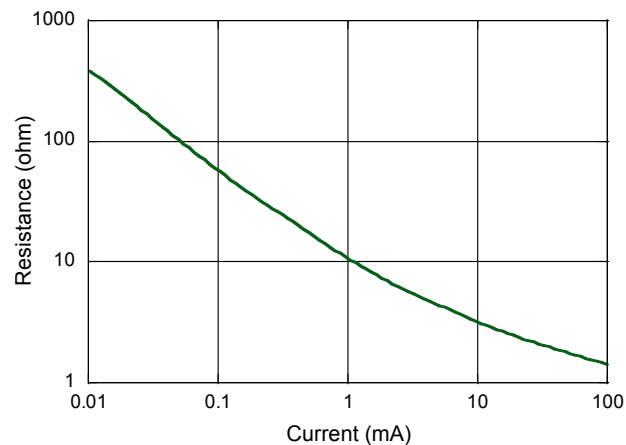

PCB Layout

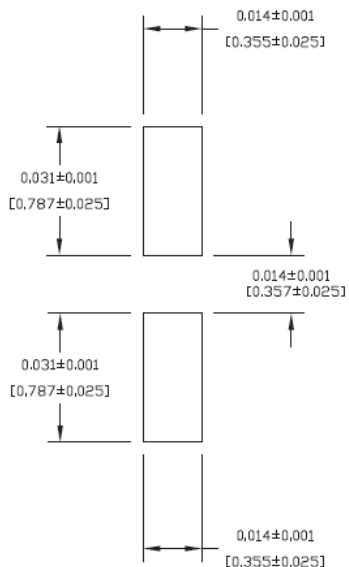

Outline

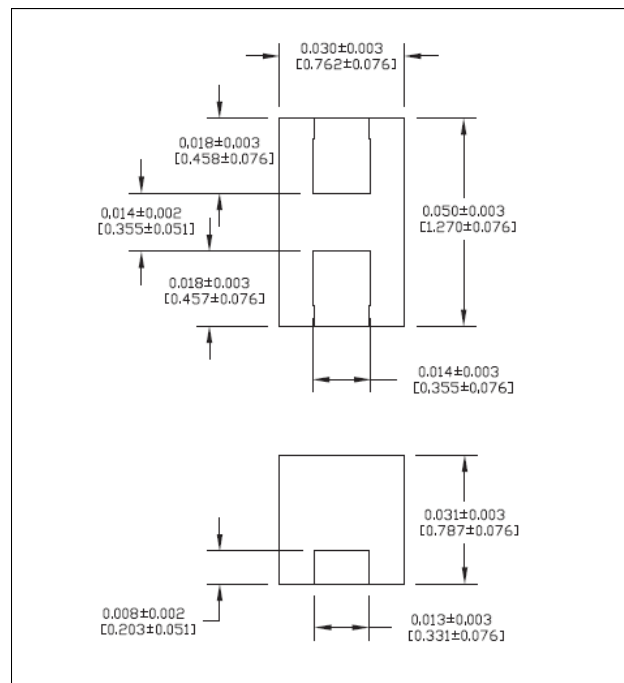

Dimensions: inches [mm]
 Finish: 300 micro inches matte tin,
 annealed 1 hour @ 150°C

MACOM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with MACOM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [PIN Diodes](#) category:

Click to view products by [MACOM](#) manufacturer:

Other Similar products are found below :

[MA45471](#) [APD1520-000](#) [APD2220-000](#) [BAR 63-02L E6327](#) [BAR 64-02EL E6327](#) [BAR 90-02ELS E6327](#) [APD0810-000](#) [MA4L032-186](#)
[MA4P606-258](#) [MA4P7435NM-1091T](#) [MA4PK2000](#) [MA4PK2001](#) [MA4PK2002](#) [MA4PK2003](#) [MA4PK2004](#) [MADP-030025-13140P](#) [BAR](#)
[65-02V H6327](#) [MA4PBL027](#) [MA4P404-30](#) [MA4AGFCP910](#) [MA4P7101F-1072T](#) [MA4L022-30](#) [MA47047-54](#) [CLA4610-000](#) [UM9301SM](#)
[5082-3077](#) [MADP-000502-12700P](#) [MA4P7493-134](#) [MA4L011-1088](#) [SMP1321-000](#) [UM4010SM](#) [UM7006B](#) [MADP-000015-000030](#)
[MPP4203-206](#) [MPS2R10-606](#) [MPP4205-206](#) [GC40605-15](#) [MA4L021-1056](#) [MSWSE-050-17](#) [MADP-007455-0287DT](#) [MADP-007448-](#)
[1146DT](#) [MA4P929-401](#) [MA4P7455-287T](#) [LM200802-M-A-300-T](#) [MADP-010633-13920T](#) [MADP-007436-0287DT](#)
[BAR6503WE6327HTSA1](#) [MADP-007433-0287HT](#) [MPL4702-406/TR](#) [MPL4703-406/TR](#)