

MSWSE-050-10

Rev. V2

Features


- Supports up to 50 W Power
- Low Insertion Loss
- Medium Isolation
- RoHS* Compliant


Applications

• ISM

Description

A broadband, high linearity, medium power series switch element in a 2.0 x 1.3 mm QFN package. This device is designed for WiMax, Wibro, WLAN, TD-SCDMA and other wireless infrastructure applications. It is also suited for 0.1 \sim 3 GHz applications with up to 50 watts of power.

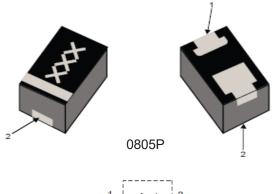



Electrical Specifications: $T_A = +25$ °C

Parameter	Test Conditions	Min.	Тур.	Max.	Units
Breakdown Voltage	I _R = 10 μA	500	_	_	V
Forward Voltage	I _F = 50 mA	_	850	950	mV
Total Capacitance	V _R = 50 V, 1 MHz	ı	0.53	0.65	pF
Series Resistance	I _F = 100 mA, 500 MHz	_	0.4	0.6	Ω
Lifetime	I _F = 10 mA, I _R = 6 mA , 50%	_	3200	_	ns
I-Region	I-Layer	_	80	_	μm
Insertion Loss	I _F = 50 mA, <0.5 GHz I _F = 50 mA, <1.0 GHz	_	0.1 0.1	0.2 0.2	dB
Isolation	$V_R = 50 \text{ V}, <0.5 \text{ GHz}$ $V_R = 50 \text{ V}, <1.0 \text{ GHz}$	12 —	15 10	_	dB

1

^{*} Restrictions on Hazardous Substances, compliant to current RoHS EU directive.



MSWSE-050-10


Rev. V2

Absolute Maximum Ratings^{1,2}

Parameter	Absolute Maximum		
Breakdown Voltage	500 V		
Forward Current	500 mA		
Thermal Resistance	10°CW		
Junction Temperature	+175°C		
Storage Temperature	-55°C to +150°C		
Solder Temperature	+260°C per JEDEC STD-J-20C		


- Exceeding any one or combination of these limits may cause permanent damage to this device.
- MACOM does not recommend sustained operation near these survivability limits.

Junction Temperature vs. Input Power Backside of Board T_A = 25°C, Board Thickness 62 mils

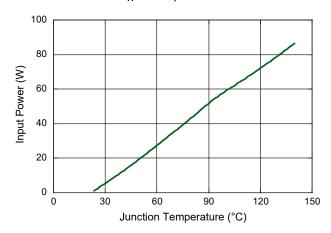


Typical RF Performance Curves @ +25°C


Insertion Loss

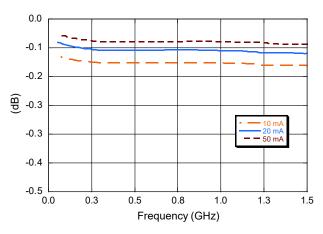


Isolation

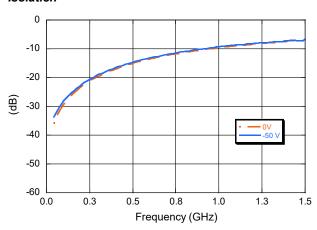

Input Return Loss

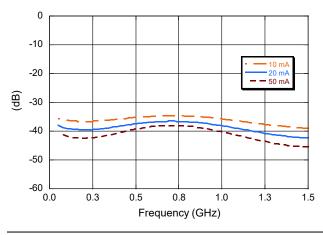

Series Resistance vs. Current, 500 MHz

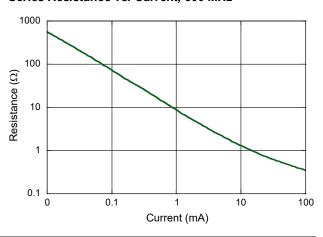

2

MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.


Visit www.macom.com for additional data sheets and product information.




MSWSE-050-10

Rev. V2


PCB Layout



Soldering Footprint

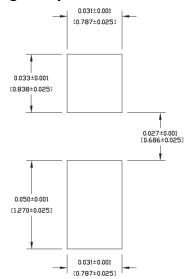

Outline (0805P)

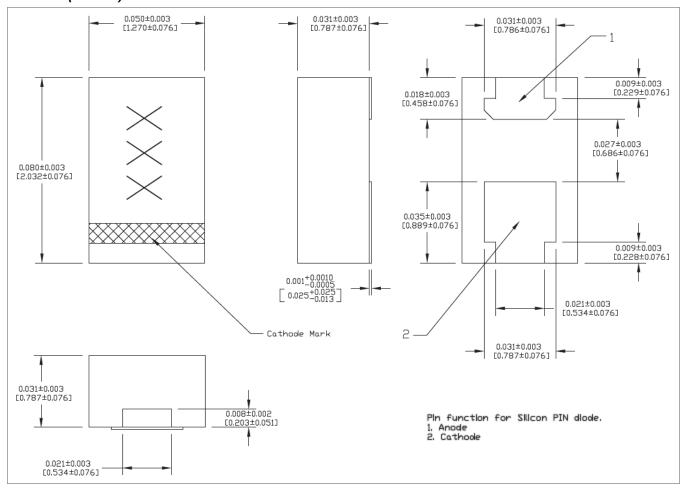

3

MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

Visit www.macom.com for additional data sheets and product information.

Silicon PIN Diode Switch Element



MSWSE-050-10

Rev. V2

MACOM Technology Solutions Inc. ("MACOM"). All rights reserved.

These materials are provided in connection with MACOM's products as a service to its customers and may be used for informational purposes only. Except as provided in its Terms and Conditions of Sale or any separate agreement, MACOM assumes no liability or responsibility whatsoever, including for (i) errors or omissions in these materials; (ii) failure to update these materials; or (iii) conflicts or incompatibilities arising from future changes to specifications and product descriptions, which MACOM may make at any time, without notice. These materials grant no license, express or implied, to any intellectual property rights.

THESE MATERIALS ARE PROVIDED "AS IS" WITH NO WARRANTY OR LIABILITY, EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHT, ACCURACY OR COMPLETENESS, OR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.

4

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for PIN Diodes category:

Click to view products by MACOM manufacturer:

Other Similar products are found below:

MA45471 MA4SPS502 APD2220-000 APD0810-000 MA4GP907 MA4L032-186 MA4L401-30 MA4P606-258 MA4P7435NM-1091T

MA4PK2000 MA4PK2001 MA4PK2004 MADP-007167-12250T MADP-030025-13140P MA4SPS421 MA4PBL027 MA4P404-30

MA4AGFCP910 MA4P7101F-1072T MA4L022-30 MA47047-54 BAR 89-02LRH E6327 UM7108B UM9701 1SV308,L3F UM9301SM

5082-3077 GC4723-42 MA4L011-1088 MSW2001-200 SMP1321-000 M17X1008 UM4010SM UM6002B UM7006A UM7006B

UM7108C GC4742-42 MADP-000015-000030 MGPN1503-C01A UMX512 LXP1000-23-2 LXP1004-23-2 MPP4205A-206 MPP4201-206

LXP1002-23-0 LXP1004-23-0 MPP4202-206 MPP4205-206 MPC8050-206