

DC/DC LED Driver

Product Specifications

High Power Constant Current LED Driver LD1060 Series	
Total Power	60 Watts max.
Input Voltages	21 – 27VDC
Number of Outputs	One

ANZ#: Z196e, May 29, 2014

Features :

DC Output with Constant Current
1-10V dimming compatible
Meet FCC and CE standards
For Dry and Damp Locations
Logic "Enable" for on/off control
Terminal block for easy, fast installation
Three Year Warranty

Applications :

LED General / Industrial Luminair
LED Architectural Lighting
LED Industrial Lighting
Solar Applications
e-Merge Applications




Specifications :

Input Range : 21 ~ 27 VDC / 4.5A max.	Input Fuse / Reverse Polarity Protection : Yes
Efficiency : 93% Typical	MTBF(@25°C) : >100,000 Hours,MIL-217F
Protection : OPP,SCP - Auto Recovery	Meet UL safety standard
Operation Temp. : -30°C ~ +55°C, Tc : 80°C	FCC Class B, EN55015 compliant
Storage Temp. : -40°C ~ +85°C	Dimension : 141(L) x 45(W) x 26(H) mm +/- 0.5mm

Model Listing :

Features / Model	LD1060 Series				
	-36-C1650	-48-C1250	-60-C1000	-88-C0680	-100-C0600
Input Voltage (DC)	24VDC (-0 / +3V)	+24VDC (+/- 3V)	+24VDC (+/- 3V)	+24VDC (+/- 3V)	+24VDC (+/- 3V)
Efficiency	93% min.				
Operational Temperature	-30 ~ +50 °C				
Dimming	1-10 VDC				
Load Regulation	± 1%				
Forward Voltage Range (VDC)	18-40 ^{note2}	27-52	32-65	44-88	80-100
Max. Forward Current (mA)	1650	1250	1000	700	600
Max. Output (Watts)	60				

Dimming Wiring Diagram :

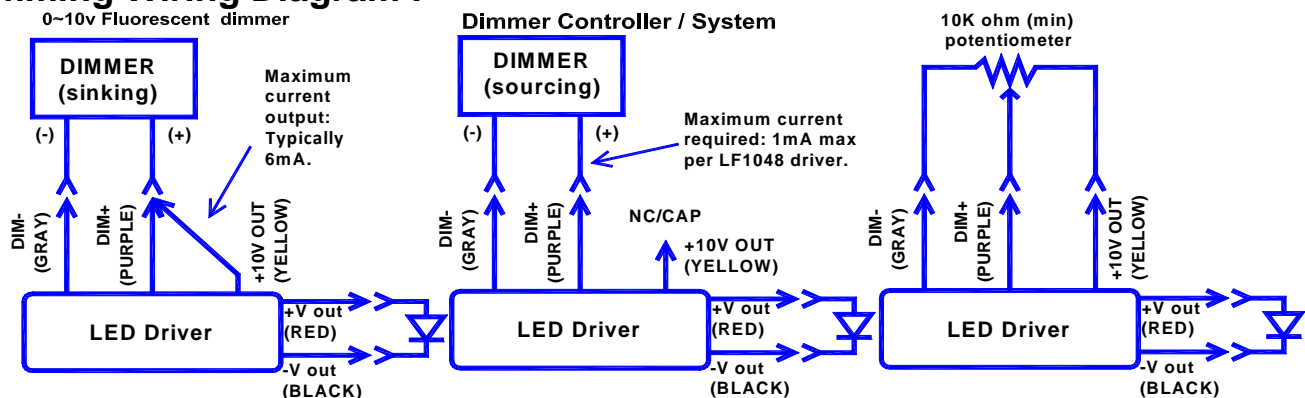


Note1: When DIM+, DIM- and +10V are left open, the output will be at the maximum rated current.

Note2: When input is greater than 18VDC, the Vf (forward voltage) has to be at least 2VDC higher than the input voltage.



Note3: LD1060-100-C0600 does comply to UL8750 safety standard but not certified at the moment.

Mechanical Specifications :

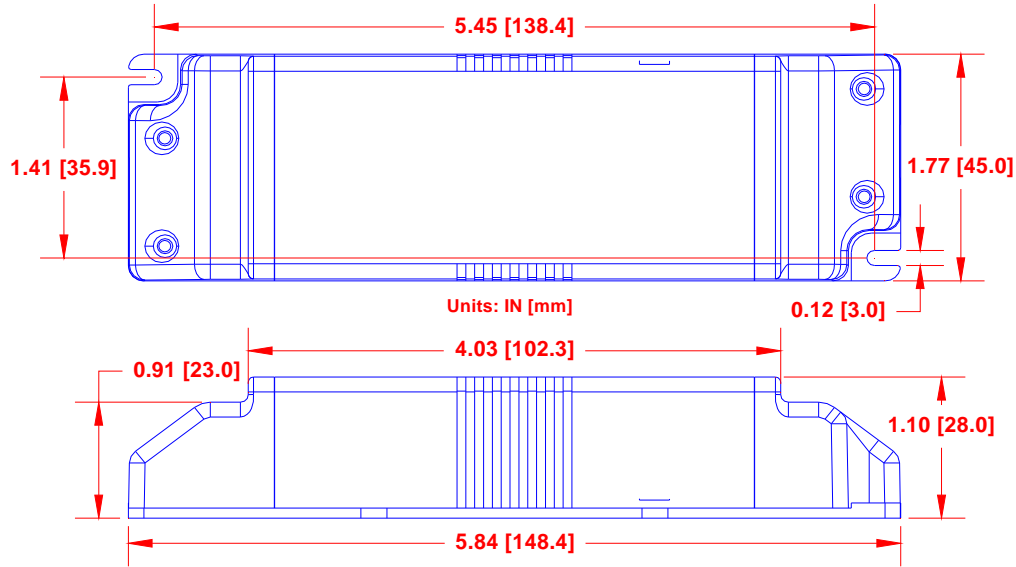

Derating Temp. vs. Load :

Efficiency – Input vs. Load :

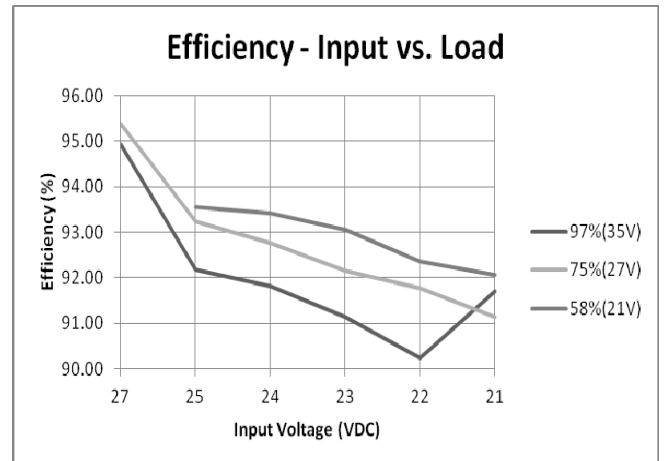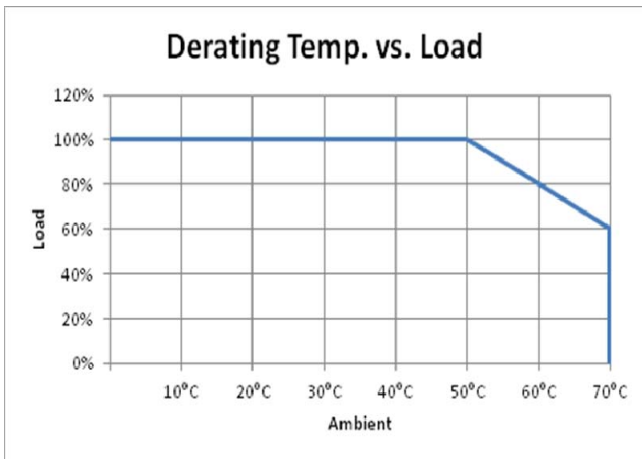

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Lighting Drivers](#) category:

Click to view products by [Magtech](#) manufacturer:

Other Similar products are found below :

[LV5235V-MPB-H](#) [MB39C602PNF-G-JNEFE1](#) [FAN5701UMP20X](#) [FAN5702UMP30X](#) [MIC2871YMK-T5](#) [MP1518DJ-LF-P](#) [MP3202DG-LF-P](#) [MP3304BDD-LF-P](#) [MP3306EG-LF-P](#) [MP3398AGY](#) [MP4033GK](#) [AL1676-10BS7-13](#) [AL1676-20AS7-13](#) [MX877RTR](#)
[NCL30085BDR2G](#) [ICL8201](#) [IS31BL3506B-TTLS2-TR](#) [PAM2841GR](#) [A8519KLPTR-T](#) [FAN5701UMP08X](#) [FAN5702UMP20X](#) [AL3157F-7](#)
[AL8807BQMP-13](#) [LV52204MTTBG](#) [TLD1120EL](#) [MP2488DN-LF](#) [MP24893DQ-LF-P](#) [MP24894GJ-P](#) [MP24895GJ-P](#) [MP3308DL-LF-Z](#)
[MP3393EF-LF](#) [MP3394SGF](#) [MP3802DQ-LF-P](#) [MP4008GS](#) [MP4031GS](#) [MP4032-1GS](#) [MP4034GS](#) [MP46885DN-LF](#) [SLG7NT4082V](#)
[SLG7NT4082VTR](#) [PCA9955BTWQ900J](#) [TLD5095EL](#) [LED6001TR](#) [STP4CMPQTR](#) [BD1604MVV-E2](#) [MC10SX1130DG](#)
[MAX16832CASAT](#) [MAX16814CATP+](#) [NCL30086BDR2G](#) [NCL30088BDR2G](#)