


**Pluggable Screw Terminal Block**  
180° Wire Entry

**Specifications:**

<b>Application</b>	Used with 5mm socket available with Sonalert® Solution models.
<b>Electrical</b>	Max Voltage: 300V Max Current: 15 Amp
<b>Screw Terminal</b>	Tightening Torque: 8 in-lbs
<b>Connection strength</b>	Minimum of 5 lbs to remove pluggable screw terminal block from socket of Sonalert device.
<b>Operating Temperature</b>	Max 110°C
<b>Material</b>	Housing: UL94V0 Polymide (Color Black) Screw: Steel / Zinc chromate
<b>Wire Range</b>	12 to 26 AWG
<b>Wire Strip Length</b>	¼ inch or 6mm
<b>Dimensional Tolerances</b>	1 place = ±.3 mm 2 places = ±.01 inch or .13 mm 3 places = ±.005 inch or .038 mm

**Dimensions:** Inches (mm)

**Flame Retardant    RoHS Compliant**

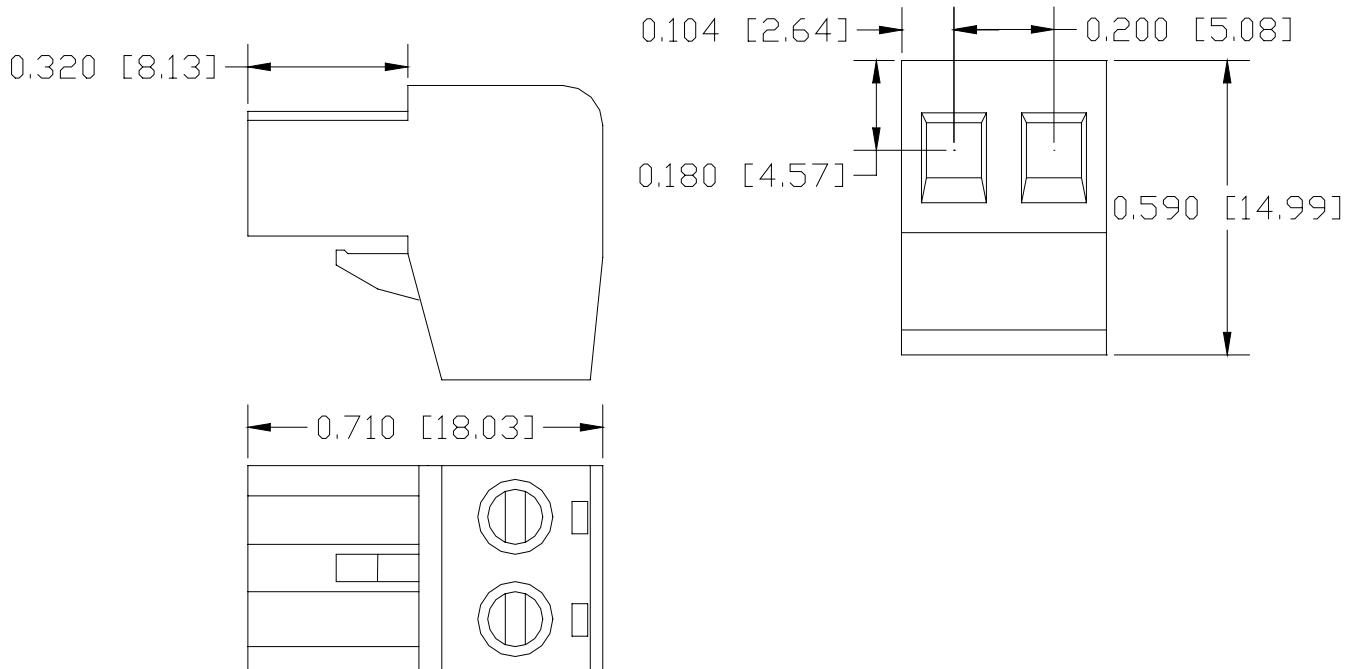

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Piezo Buzzers & Audio Indicators](#) category:*

*Click to view products by [Mallory Sonalert](#) manufacturer:*

Other Similar products are found below :

[6-4](#) [68S1240-PA](#) [MBA-624](#) [FDG06PSLLF](#) [FDG111PLF](#) [F/NRMB 24 BLACK LF](#) [PF-35N29WQ](#) [PFD-21A29W](#) [PFD-27A35PQ](#) [PL-21N30WQ](#) [PL-27A35PSQ](#) [PLD-21N30W](#) [PLD-21N30WQ](#) [PS-531Q](#) [PT-3534FP](#) [EBPT-401](#) [B822B](#) [B/CP28/100DB/BLACK LF](#) [PB-1220PEQ](#) [S6109](#) [SBM616PR](#) [SC110E](#) [SC2036ACP](#) [SC616N-2](#) [SC628FW](#) [SC628MPG](#) [SC648D](#) [SCS045MD9DT3S](#) [FCM12PLF](#) [F/EB20P-DR LF](#) [F/SMD03A LF](#) [FSMD8585JSLF](#) [F/SU 21-02 LF](#) [F/TCW 12 WITH LABEL LF](#) [F/UCW 06 WITH LABEL LF](#) [PFD-27N36W](#) [PKM22EPPH40S1-B0](#) [PKM35-4A0](#) [PL-35N29WQ](#) [PS-552Q](#) [CM-5](#) [REF-202](#) [B/SE 128 RED LF](#) [KBS-20DA-7AS](#) [KBS-27DA-5C-105](#) [LSC628ANR](#) [03-810.001](#) [RTO-1R07-001](#) [PL-21N31PQ](#) [B/CP 28B BLACK LF](#)