
MALIORY Mallory Sonalert Products Inc. Sales Outline Drawing Part # AST200Q Revision F

May not be suitable for all Medical and Aerospace applications. Contact Mallory Sonalert to discuss your application. NO CIRCUITRY

110 0111011111	
Oscillation Frequency (Hz)	2731
Operating Voltage (Vp-p/max)	2.0 ~ 4.0
Rated Voltage (Vp-p)	3.0
Current Consumption Max. (mA)	80 at Rated Voltage
Sound Pressure Level Min. (dB/min)	85 at 10cm at Rated Voltage
Coil Resistance (Ω)	15 ± 2
Operating Temperature (°C)	-20 ~ +85
Storage Temperature (°C)	-30 ~ +90
Housing	LCP plastic resin (Color : Black)
Type of Connection	SMD
Condition by reflow soldering (°C)	250 ± 5 / within 5 sec
Condition by hand soldering (°C)	350 ± 20 / within 5 sec
Weight (g)	0.4
Options	For other options contact factory

Dimensions: (units: mm) PS: Vp-p = 1/2duty, square wave **RoHS Compliant**

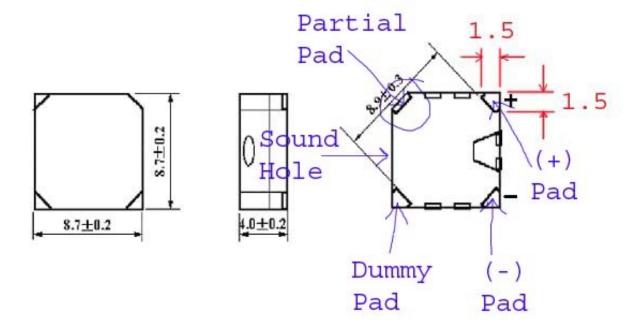

^{*} Dummy pad and Partial Pad are connected internally and are intended to only be used to help secure the part to the circuit board.

Packaging:

Parts are supplied in tubes of 35 pieces.

Units come with wash label and are appropriate for aqueous wash.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Piezo Buzzers & Audio Indicators category:

Click to view products by Mallory Sonalert manufacturer:

Other Similar products are found below:

6-4 68S1240-PA MBA-624 FDG06PSLLF FDG111PLF F/NRMB 24 BLACK LF PF-35N29WQ PFD-21A29W PFD-27A35PQ PL-21N30WQ PL-27A35PSQ PLD-21N30WQ PS-531Q PT-3534FP EBPT-401 B822B PB-1220PEQ S6109 SBM616PR SC110E SC2036ACP SC616N-2 SC628FW SC628MPG SC648D SCS045MD9DT3S FCM12PLF F/EB20P-DR LF F/SMD03A LF FSMD8585JSLF F/SU 21-02 LF F/TCW 12 WITH LABEL LF F/UCW 06 WITH LABEL LF PFD-27N36W PKM22EPPH40S1-B0 PKM35-4A0 PL-35N29WQ PS-552Q CM-5 REF-202 B/SE 128 RED LF KBS-20DA-7AS KBS-27DA-5C-105 LSC628ANR 03-810.001 RTO-1R07-001 PL-21N31PQ B/CP 28B BLACK LF F/DGX 05P WITH LABEL LF