
## MALLORY Mallory Sonalert Products,Inc. | Part #: MSS5GM | Sales Outline Drawing | Revision: | B

Specifications:	cUL Recognized to IEC60601-1-8	
Sound Level Category:	Loud	
Mode of Operation:	Medium Priority Alarm 3 beeps repeating every 7.5 sec	
Voltage Rating:	5 ± 0.5 VDC	
Loudness @ 10cm:	85 to 95 dB(A) Typ.	
Frequency:	150 to 4000 Hz	
Average Current Draw:	<200mA Typ.	
lpk Current*:	400mA	
Housing Material:	Valox (UL94V-0), Color: Black	
Storage Temperature:	-30° to +60° C	
Operating Temperature:	-30° to +55° C	
Weight Typical:	6.0g	
Options:	Please contact factory.	

Dimensions: Inches (mm) cUL Recognized ROHS Compliant

PATENT NUMBER: 7880593

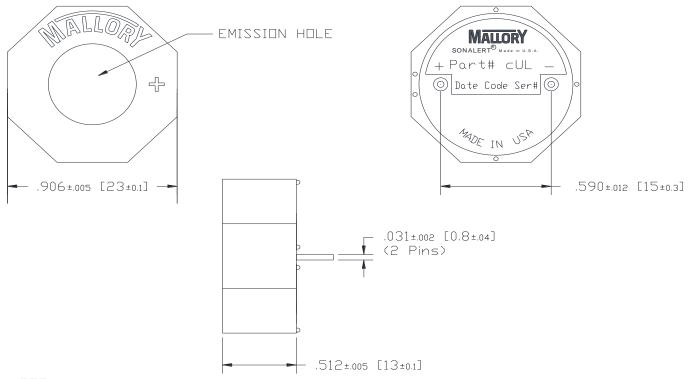

NOTE A: TERMINALS - .031" DIA. NICKEL/TIN COATED BRASS. NOTE B:

MOUNTING- INSERT INTO PRINTED CIRCUIT BOARD AND HAND OR MACHINE SOLDER. UNITS ARE SUITABLE FOR WAVE SOLDERING. BOARDS ARE NOT SUITABLE FOR WASH. RECOMMENDED MAXIMUM TEMPERATURE AND TIME DURATION FOR WAVE SOLDERING IS +270°C AND 3 SECONDS RESPECTIVELY.

\*lpk = Instantaneous Peak

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Piezo Buzzers & Audio Indicators category:

Click to view products by Mallory Sonalert manufacturer:

Other Similar products are found below:

6-4 68S1240-PA MBA-624 FDG06PSLLF FDG111PLF F/NRMB 24 BLACK LF PF-35N29WQ PFD-21A29W PFD-27A35PQ PL-21N30WQ PL-27A35PSQ PLD-21N30WQ PS-531Q PT-3534FP EBPT-401 B822B PB-1220PEQ S6109 SBM616PR SC110E SC2036ACP SC616N-2 SC628FW SC628MPG SC648D SCS045MD9DT3S FCM12PLF F/EB20P-DR LF F/SMD03A LF FSMD8585JSLF F/SU 21-02 LF F/TCW 12 WITH LABEL LF F/UCW 06 WITH LABEL LF PFD-27N36W PKM22EPPH40S1-B0 PKM35-4A0 PL-35N29WQ PS-552Q CM-5 REF-202 B/SE 128 RED LF KBS-20DA-7AS KBS-27DA-5C-105 LSC628ANR 03-810.001 RTO-1R07-001 PL-21N31PQ B/CP 28B BLACK LF F/DGX 05P WITH LABEL LF