MALLORY Mallory Sonalert Products Inc.	Part #	PB-0927PQ
Sales Outline Drawing	Revision	F


May not be suitable for all Medical and Aerospace applications. Contact Mallory Sonalert to discuss your application. NO CIRCUITRY

no emeciini		
Oscillation Frequency (Hz)	2731	
Operating Voltage (Vp-p)	4.5 ~ 5.5	
Rated Voltage (Vp-p)	5.0	
Current Consumption Max. (mA)	75 at Rated Voltage	
Sound Pressure Level (dB/min)	85 at 10cm at Rated Voltage	
Coil Resistance (Ω)	25 ± 4	
Operating Temperature (°C)	-20 ~ +70	
Storage Temperature (°C)	-30 ~ +80	
Lead Pin	Tin Plated Brass	
Housing	ABS 757 UL94HB plastic resin	
	(Color: Black)	
Weight (Grams)	0.8	
Condition by wave soldering (°C)	260 ± 5 / within 5 sec	
Condition by hand soldering (°C)	350 ± 20 / within 5 sec	
Options	For other options contact factory	

Dimensions: (units: mm)

PS: Vp-p = 1/2duty, square wave

RoHS Compliant

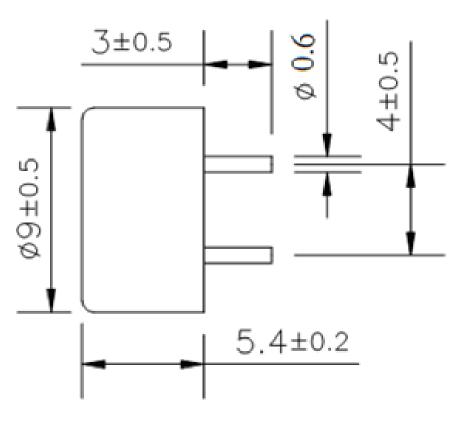

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Speakers & Transducers category:

Click to view products by Mallory Sonalert manufacturer:

Other Similar products are found below:

FC-30814-P127 PB-1220PE PB-2015PQ 900-00001 AB2025B-LW50-R SWFK-31736-000 PT-2065FW PT-4175W AT-2830-TW-LW35-R ED-30761-000 CI-30120-A42 SMT-0440-T-2-R PB-0927PQ BF-7083-000 BF-9778-000 SMS2020-08H4.5 LF BDT1717-08H6.5W56MLF BLS50-1-08H18.2B-03 LF 02094 02097 GSPK1003PN-8R0.2W-L100 GSPK151103TN-8R0.2W GSPK2014035PN-8R0.5W-L100 FS5353DS0830-H19.3 TE082703-8 XMLP040BD21F 24520 SMT-0540-S-2-R 1450069 9091653 9091661 IPS-G6000-5 9090231 FS50MS0820-H9.7 FS4014-4-2W PBM4-13.B29R.A115.0663 PBM4-13.B31R.A115.0663 PBM4-13.B33R.A115.0663 PBM4-13.B35R.A115.0663 A-10-6-BG360-HD1Z-GA-M4Z-ZW A-10-6-BG410-HD1Z-AA-M4Z-ZW A-10-6-BG410-HD1Z-FC-AGZ-ZW A-10-6-BG310-HD1Z-GA-M4Z-ZW A-10-6-BG310-HD1Z-AA-M4Z-ZW A-10-6-BG310-HD1Z-GA-M4Z-ZW A-10-6-BG310-HD1Z-AA-M4Z-ZW A-10-6-BG310-HD1Z-AA-M4Z-ZW A-10-6-BG310-HD1Z-AA-M4Z-ZW A-10-6-BG325-HD1Z-AA-M4Z-ZW A-10-