
## MALLORY Mallory Sonalert Products Inc. Sales Outline Drawing Part # PB-1622PQ Revision E

## May not be suitable for all Medical and Aerospace applications. Contact Mallory Sonalert to discuss your application. NO CIRCUITRY

110 CIRCUIRI	
Oscillation Frequency (Hz)	2048
Operating Voltage (Vp-p)	8 ~ 18
Rated Voltage (Vp-p)	12
Current Consumption Max. (mA)	40 at Rated Voltage
Sound Pressure Level Min. (dB)	85 at 10cm at Rated Voltage
Coil Resistance ( $\Omega$ )	$145 \pm 15$
Operating Temperature (°C)	-40 ~ +85
Storage Temperature (°C)	-40 ~ +85
Condition by wave (°C)	$260 \pm 5$ / within 5 sec
Condition by hand (°C)	$350 \pm 20$ / within 5 sec
Housing	PPO plastic resin
-	(Color: Black)
Leading Pin	Tin Plated Brass
Weight (Grams)	5.0
Options	For other options contact factory

**Dimensions:** (units: mm) PS: Vp-p=1/2 duty, square wave **ROHS Compliant** 

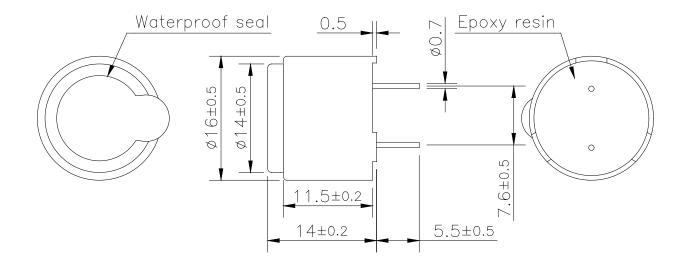

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Speakers & Transducers category:

Click to view products by Mallory Sonalert manufacturer:

Other Similar products are found below:

FC-30814-P127 PB-1220PE PB-2015PQ 900-00001 AB2025B-LW50-R SWFK-31736-000 PT-2065FW PT-4175W AT-2830-TW-LW35-R ED-30761-000 CI-30120-A42 SMT-0440-T-2-R PB-0927PQ BF-7083-000 BF-9778-000 SMS2020-08H4.5 LF BDT1717-08H6.5W56MLF BLS50-1-08H18.2B-03 LF 02094 02097 GSPK1003PN-8R0.2W-L100 GSPK151103TN-8R0.2W GSPK2014035PN-8R0.5W-L100 FS5353DS0830-H19.3 TE082703-8 XMLP040BD21F 24520 SMT-0540-S-2-R 1450069 9091653 9091661 IPS-G6000-5 9090231 FS50MS0820-H9.7 FS4014-4-2W PBM4-13.B29R.A115.0663 PBM4-13.B31R.A115.0663 PBM4-13.B33R.A115.0663 PBM4-13.B35R.A115.0663 A-10-6-BG360-HD1Z-GA-M4Z-ZW A-10-6-BG410-HD1Z-AA-M4Z-ZW A-10-6-BG410-HD1Z-FC-AGZ-ZW A-10-6-BG310-HD1Z-GA-M4Z-ZW A-10-6-BG310-HD1Z-AA-M4Z-ZW A-10-6-BG310-HD1Z-GA-M4Z-ZW A-10-6-BG310-HD1Z-AA-M4Z-ZW A-10-6-BG310-HD1Z-AA-M4Z-ZW A-10-6-BG310-HD1Z-AA-M4Z-ZW A-10-6-BG325-HD1Z-AA-M4Z-ZW A-10-