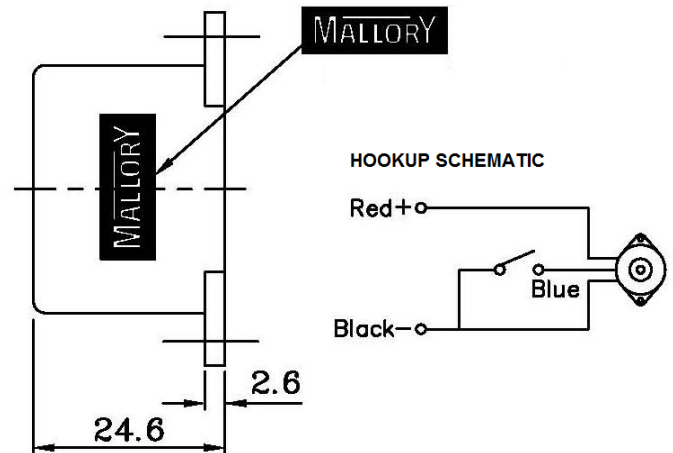
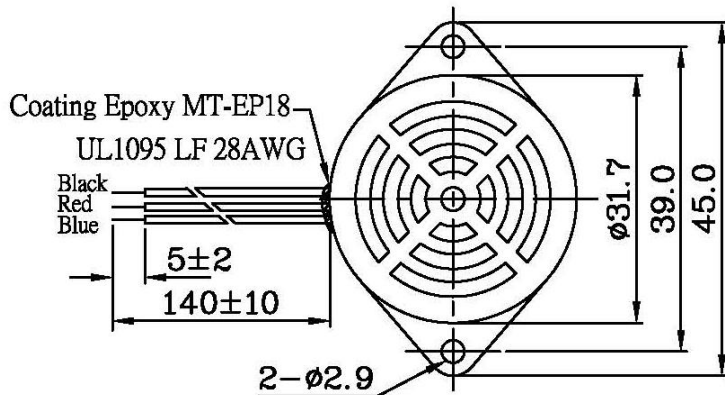


Sales Outline DrawingRevision **A****Specifications:**

Resonance Freq Fo (Hz)	1230/1010 ± 80
Operating Voltage (Vdc)	6 ~ 18
Current consumption (mA)	Max 90 at 6Vdc Max 125 at 12Vdc Max 155 at 18Vdc
Standby current (mA)	2.0 at 6Vdc 5.0 at 12Vdc 9.0 at 18Vdc
Output S.P.L. (dB) @ 30cm	Min 75 at 6Vdc Min 80 at 12Vdc Min 82 at 18Vdc
Tone	Ding-Dong
Operating Temp	-20 to 55°C
Storage Temp	-25 to 60°C
Material	ABS UL94HB (Black)
Weight (g)	18.0
Options	For other options contact factory

Dimensions: ±0.5 (units: mm)**ROHS Compliant**

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Piezo Buzzers & Audio Indicators](#) category:

Click to view products by [Mallory Sonalert](#) manufacturer:

Other Similar products are found below :

[6-4](#) [68S1240-PA](#) [MBA-624](#) [FDG06PSLLF](#) [FDG111PLF](#) [F/NRMB 24 BLACK LF](#) [PF-35N29WQ](#) [PFD-21A29W](#) [PFD-27A35PQ](#) [PL-21N30WQ](#) [PL-27A35PSQ](#) [PLD-21N30W](#) [PLD-21N30WQ](#) [PS-531Q](#) [PT-3534FP](#) [EBPT-401](#) [B822B](#) [PB-1220PEQ](#) [S6109](#) [SBM616PR](#) [SC110E](#) [SC2036ACP](#) [SC616N-2](#) [SC628FW](#) [SC628MPG](#) [SC648D](#) [SCS045MD9DT3S](#) [FCM12PLF](#) [F/EB20P-DR LF](#) [F/SMD03A LF](#) [FSMD8585JSLF](#) [F/SU 21-02 LF](#) [F/TCW 12 WITH LABEL LF](#) [F/UCW 06 WITH LABEL LF](#) [PFD-27N36W](#) [PKM22EPPH40S1-B0](#) [PKM35-4A0](#) [PL-35N29WQ](#) [PS-552Q](#) [CM-5](#) [REF-202](#) [B/SE 128 RED LF](#) [KBS-20DA-7AS](#) [KBS-27DA-5C-105](#) [LSC628ANR](#) [03-810.001](#) [RTO-1R07-001](#) [PL-21N31PQ](#) [B/CP 28B BLACK LF](#) [F/DGX 05P WITH LABEL LF](#)