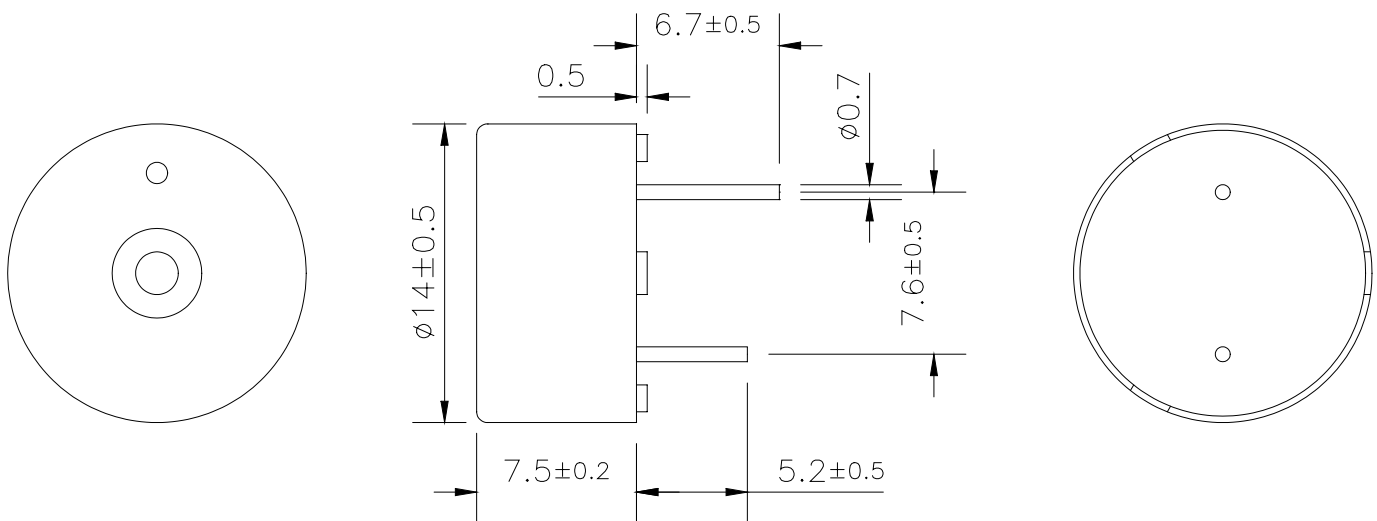


OBSOLETE- USE PK-12N40PQ**Specificat**

Resonant Frequency (Hz)	4100 ± 500
Operating Voltage (Vdc)	3 ~ 15
Rated Voltage (Vdc)	12
Current Consumption Max. (mA)	10 at Rated Voltage
Sound Pressure Level Min. (dB)	83 at 10cm at Rated Voltage
Tone/Pulse Rate	Constant
Operating Temperature (°C)	-20 ~ +70
Storage Temperature (°C)	-30 ~ +80
Housing	ABS 707 UL94HB plastic resin (Color: Black)
Leading Pins	Tin Plated Brass
Weight (Grams)	0.8
Options	For other options contact factory

Dimensions: (units: mm)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Mallory Sonalert manufacturer:

Other Similar products are found below :

[458-KIT](#) [ACC01](#) [ACC02](#) [ACC03](#) [ACC09](#) [ASI09N27M-05Q](#) [ASI12N35MQ](#) [ASI12N35MTRQ](#) [ASI301Q](#) [ASI301TRQ](#) [ASI401Q](#)
[AST0540MW-03Q](#) [AST0540MW-03TRQ](#) [AST0727MW-3.6ATRQ](#) [AST0760MCTRQ](#) [AST0827MW-03BTRQ](#) [AST0827MW-03TRQ](#)
[AST0927MW-03TRQ](#) [AST0927MW-3.6TRQ](#) [AST0940MCQ](#) [AST0940MCTRQ](#) [AST100Q](#) [AST100TRQ](#) [AST1027MW-03TRQ](#)
[AST1109MLQ](#) [AST1109MLTRQ](#) [AST1240MLQ](#) [AST1240MLTRQ](#) [AST1341MCTRQ](#) [AST1440MAQ](#) [AST1440MATRQ](#) [AST1575BMAQ](#)
[AST1575BMATRQ](#) [AST1628MAQ](#) [AST1628MATRQ](#) [AST1640MACTRQ](#) [AST1750MAQ](#) [AST1750MATRQ](#) [AST200Q](#) [AST501Q](#)
[AST605Q](#) [AST7525MAQ](#) [AST7525MATRQ](#) [BNR1](#) [CNR1](#) [FL1M-12CA-1-G12V](#) [FL1M-12CA-1-G24V](#) [FL1M-12CA-1-R12V](#) [FL1M-12CA-1-R24V](#) [FL1M-12CA-1-R2V](#)