


Specifications:

Sound level Category	Medium Sound Level
Mode of Operation	Continuous tone
Mounting	Printed Circuit Board (see note B)
Voltage Rating	4 - 28 Vdc
Frequency	2900 Hz ±500 Hz
Loudness (Min. Voltage)	64 dB(A) min. @ 2 FT and 4 Vdc
Loudness (Max Voltage)	78 dB(A) min. @ 2FT and 28 Vdc
Current Draw	3 mA Max @ 4 Vdc
Current Draw	16 mA Max @ 28 Vdc
Storage Temperature	-40°C to +85°C
Operating Temperature	-30°C to +65°C
Weight (Typical)	0.6 oz (17 g)
Housing	6/6 Nylon, Color Black
Options	For other options contact factory

Dimensions: Inches (mm)

UL Recognized 

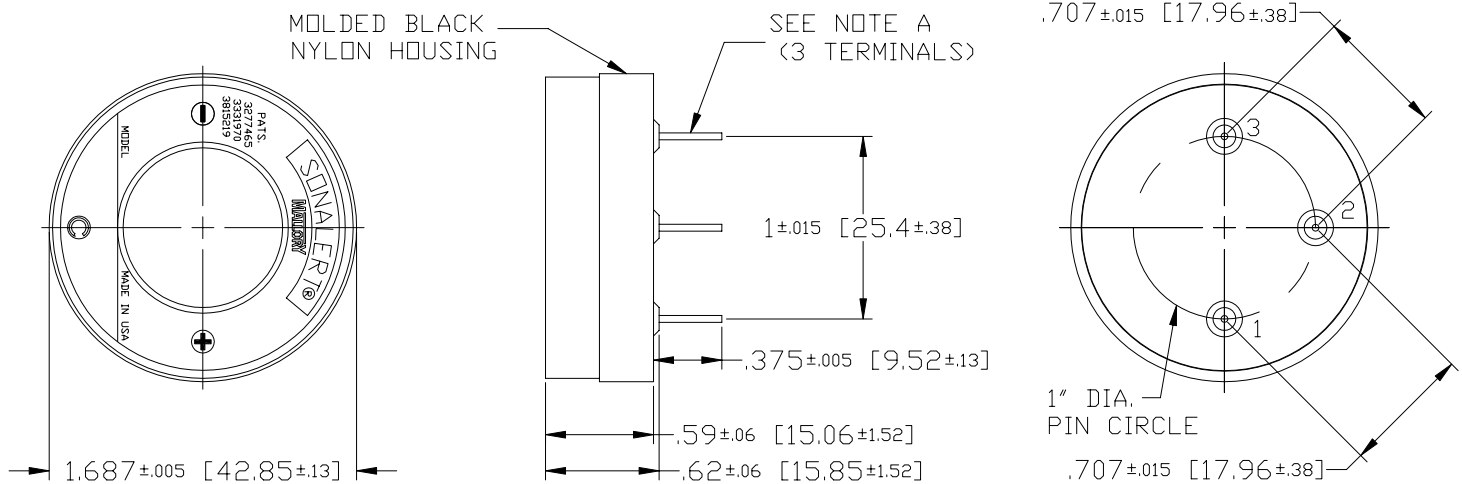

NOTE A:
 TERMINALS - .031" DIA. SOLDER COATED COPPER-CLAD STEEL. TERMINAL 1 IS POSITIVE, TERMINAL 3 IS NEGATIVE. TERMINAL 2 IS FOR SUPPORT ONLY - NO ELECTRICAL CONNECTION.

NOTE B:
 MOUNTING - INSERT INTO PRINTED CIRCUIT BOARD AND HAND OR MACHINE SOLDER.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Mallory Sonalert manufacturer:

Other Similar products are found below :

[458-KIT](#) [ACC01](#) [ACC02](#) [ACC03](#) [ACC09](#) [ASI09N27M-05Q](#) [ASI12N35MQ](#) [ASI12N35MTRQ](#) [ASI301Q](#) [ASI301TRQ](#) [ASI401Q](#)
[AST0540MW-03Q](#) [AST0540MW-03TRQ](#) [AST0727MW-3.6ATRQ](#) [AST0760MCTRQ](#) [AST0827MW-03BTRQ](#) [AST0827MW-03TRQ](#)
[AST0927MW-03TRQ](#) [AST0927MW-3.6TRQ](#) [AST0940MCQ](#) [AST0940MCTRQ](#) [AST100Q](#) [AST100TRQ](#) [AST1027MW-03TRQ](#)
[AST1109MLQ](#) [AST1109MLTRQ](#) [AST1240MLQ](#) [AST1240MLTRQ](#) [AST1341MCTRQ](#) [AST1440MAQ](#) [AST1440MATRQ](#) [AST1575BMAQ](#)
[AST1575BMATRQ](#) [AST1628MAQ](#) [AST1628MATRQ](#) [AST1640MACTRQ](#) [AST1750MAQ](#) [AST1750MATRQ](#) [AST200Q](#) [AST501Q](#)
[AST605Q](#) [AST7525MAQ](#) [AST7525MATRQ](#) [BNR1](#) [CNR1](#) [FL1M-12CA-1-G12V](#) [FL1M-12CA-1-G24V](#) [FL1M-12CA-1-R12V](#) [FL1M-12CA-1-R24V](#) [FL1M-12CA-1-R2V](#)