



**Mallory Sonalert Products, Inc.**

Part #:

**SCE028LD3MG4B**

# Sales Outline Drawing

Revision:

**C**


## Specifications:

|                        |  |                            |                             |                            |
|------------------------|--|----------------------------|-----------------------------|----------------------------|
| Sound Level Category:  | Loud   | Loud                       | Loud                        | Medium                     |
| Mode of Operation:     | Continuous   | Double Pulse               | Quick Pulse                 | Dual Tone                  |
| Loudness @ 2 FT:       | 85 to 95 dB(A) Typ.  | 85 to 95 dB(A) Typ.        | 85 to 95 dB(A) Typ.         | 75 to 85 dB(A) Typ.        |
| Pulse Rate (PPS):      | N/A  | 2                          | 60                          | 1.5                        |
| Frequency:             | 2900 ± 500 Hz  | 2900 ± 500 Hz              | 2900 ± 500 Hz               | 3.0 - 2.9 kHz              |
| Connection:            | T-BLOCK ONLY   | T-BLOCK; BLACK WIRE TO (-) | T-BLOCK; YELLOW WIRE TO (-) | T-BLOCK; BOTH WIRES TO (-) |
| Voltage Rating:        | 16 to 28 VDC   |                            |                             |                            |
| Current Draw:          | 40mA MAX   |                            |                             |                            |
| Housing Material:      | 6/6 Nylon, Color: Black  |                            |                             |                            |
| Storage Temperature:   | -40° to +85° C   |                            |                             |                            |
| Operating Temperature: | -40° to +85° C   |                            |                             |                            |
| Panel Mounting:        | Recommended hole size is 1.25"(31.75mm). Thread front will fit standard 30mm(1.181") hole. |                            |                             |                            |
| Knurled Nut:           | Used to attach part to panel. The max recommended torque is 10 in-lbs.                     |                            |                             |                            |
| Weight (Typical):      | 1.6 oz (45g)   |                            |                             |                            |
| NEMA 3R,4X, & 12:      | Approved with use of ACC03.  |                            |                             |                            |
| cUL Recognition:       | cUL Recognized   |                            |                             |                            |
| Options:               | Please contact factory.  |                            |                             |                            |

**Dimensions:** Inches (mm)

**cUL Recognized**

**ROHS Compliant**

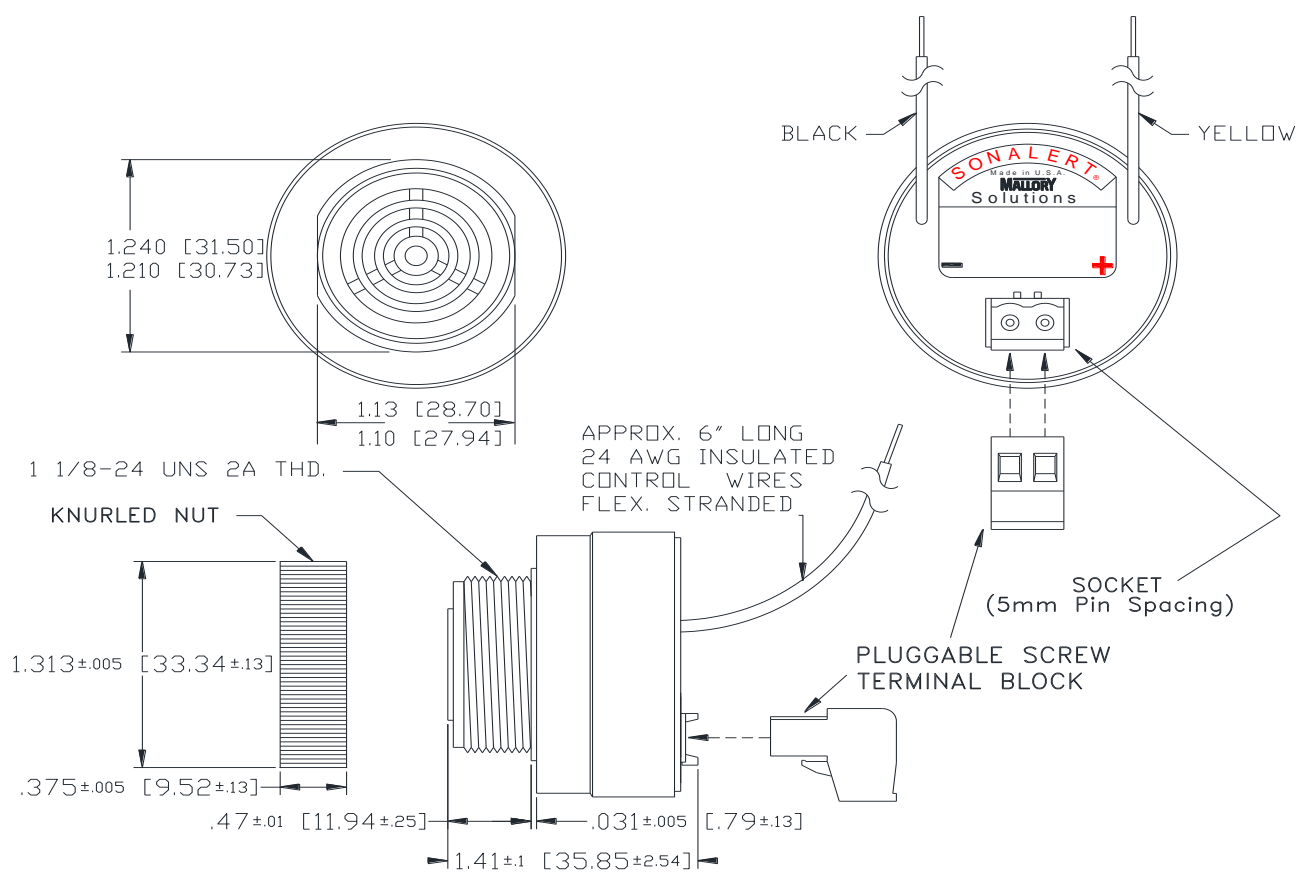

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Piezo Buzzers & Audio Indicators](#) category:*

*Click to view products by [Mallory Sonalert](#) manufacturer:*

Other Similar products are found below :

[6-4](#) [68S1240-PA](#) [MBA-624](#) [FDG06PSLLF](#) [FDG111PLF](#) [F/NRMB 24 BLACK LF](#) [PF-35N29WQ](#) [PFD-21A29W](#) [PFD-27A35PQ](#) [PL-21N30WQ](#) [PL-27A35PSQ](#) [PLD-21N30W](#) [PLD-21N30WQ](#) [PS-531Q](#) [PT-3534FP](#) [EBPT-401](#) [B822B](#) [B/CP28/100DB/BLACK LF](#) [PB-1220PEQ](#) [S6109](#) [SBM616PR](#) [SC110E](#) [SC2036ACP](#) [SC616N-2](#) [SC628FW](#) [SC628MPG](#) [SC648D](#) [SCS045MD9DT3S](#) [FCM12PLF](#) [F/EB20P-DR LF](#) [F/SMD03A LF](#) [FSMD8585JSLF](#) [F/SU 21-02 LF](#) [F/TCW 12 WITH LABEL LF](#) [F/UCW 06 WITH LABEL LF](#) [PFD-27N36W](#) [PKM22EPPH40S1-B0](#) [PKM35-4A0](#) [PL-35N29WQ](#) [PS-552Q](#) [CM-5](#) [REF-202](#) [B/SE 128 RED LF](#) [KBS-20DA-7AS](#) [KBS-27DA-5C-105](#) [LSC628ANR](#) [03-810.001](#) [RTO-1R07-001](#) [PL-21N31PQ](#) [B/CP 28B BLACK LF](#)