


**Specifications:**

Sound level Category	Medium Sound Level
Mode of Operation	Continuous
Mounting	Panel (see note A)
Voltage Rating	1 – 5 Vdc
Frequency	2900 Hz ±500 Hz
Loudness (Min. Voltage)	55 dB(A) min. @ 2 FT and 1 Vdc
Loudness (Max Voltage)	68 dB(A) min. @ 2FT and 5 Vdc
Current Draw	3 mA Max @ 1 Vdc
Current Draw	12 mA Max @ 5 Vdc
Storage Temperature	-40°C to +85°C
Operating Temperature	-30°C to +65°C
Weight (Typical)	0.5 oz (17 g)
Housing	6/6 Nylon, Color Black
Options	For other options contact factory

**RoHS Compliant**

**Dimensions:** Inches (mm)

NOTE A:  
MOUNTING - THIS PORTION  
SNAP-LOCKS INTO PANELS 1/32" TO  
1/8" THICK USING APPROPRIATE  
COMPRESSION WASHER.  
1.063 ±.005 DIA. PANEL HOLE REQ'D.

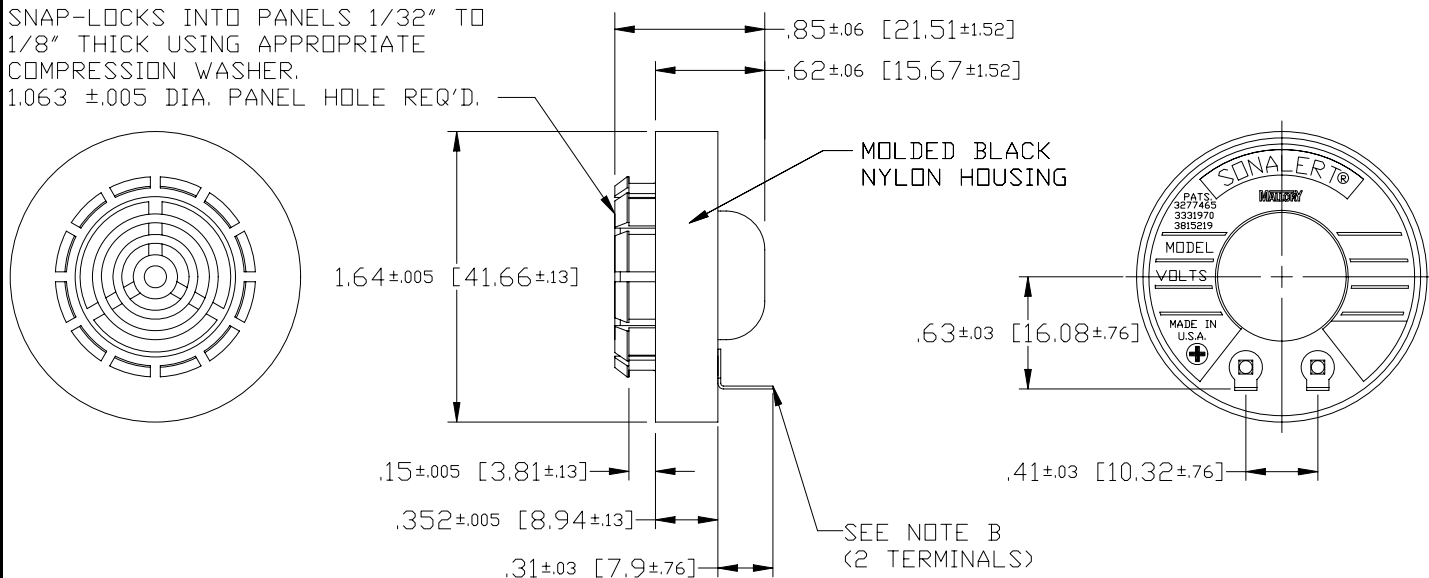

NOTE B:  
TERMINALS - .016 BRASS, HOT TIN FINISH WITH  
.076 WIRE HOLE. TERMINAL WILL ACCEPT  
STANDARD 1/8" QUICK CONNECT

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Piezo Buzzers & Audio Indicators](#) category:*

*Click to view products by [Mallory Sonalert](#) manufacturer:*

Other Similar products are found below :

[6-4](#) [68S1240-PA](#) [MBA-624](#) [FDG06PSLLF](#) [FDG111PLF](#) [F/NRMB 24 BLACK LF](#) [PF-35N29WQ](#) [PFD-21A29W](#) [PFD-27A35PQ](#) [PL-21N30WQ](#) [PL-27A35PSQ](#) [PLD-21N30W](#) [PLD-21N30WQ](#) [PS-531Q](#) [PT-3534FP](#) [EBPT-401](#) [B822B](#) [B/CP28/100DB/BLACK LF](#) [PB-1220PEQ](#) [S6109](#) [SBM616PR](#) [SC110E](#) [SC2036ACP](#) [SC616N-2](#) [SC628FW](#) [SC628MPG](#) [SC648D](#) [SCS045MD9DT3S](#) [FCM12PLF](#) [F/EB20P-DR LF](#) [F/SMD03A LF](#) [FSMD8585JSLF](#) [F/SU 21-02 LF](#) [F/TCW 12 WITH LABEL LF](#) [F/UCW 06 WITH LABEL LF](#) [PFD-27N36W](#) [PKM22EPPH40S1-B0](#) [PKM35-4A0](#) [PL-35N29WQ](#) [PS-552Q](#) [CM-5](#) [REF-202](#) [B/SE 128 RED LF](#) [KBS-20DA-7AS](#) [KBS-27DA-5C-105](#) [LSC628ANR](#) [03-810.001](#) [RTO-1R07-001](#) [PL-21N31PQ](#) [B/CP 28B BLACK LF](#)