
MALLORY Mallory Sonalert Products, Inc. Part #: ZA028MDMT4 Sales Outline Drawing Revision: F

Specifications:

Sound Level Category:	Medium	Medium	Medium	Medium
Mode of Operation:	Continuous	Slow Pulse @ 1 PPS	Fast Pulse @ 10 PPS	Dual Tone 3.8 - 3.7 kHz @ 1.5 WPS
Loudness @ 2 FT:	75 to 85 dB(A) Typ.	75 to 85 dB(A) Typ.	75 to 85 dB(A) Typ.	75 to 85 dB(A) Typ.
Frequency:	3900 ± 500 Hz	3900 ± 500 Hz	3900 ± 500 Hz	3700 ± 500 Hz
Connection:	"+" to Positive, "-" to Ground	"+" to Positive, "-" and "1" to Ground	"+" to Positive, "-" and "2" to Ground	"+" to Positive, "-", "1" and "2" to Ground
Voltage Rating:	16 to 28 VDC			
Current Draw:	40mA MAX			
Housing Material:	6/6 Nylon, Color: Black			
Storage Temperature:	-40° to +80° C			
Operating Temperature	-30° to +65° C			
Panel Mounting:	Recommended hole size is 22.5 mm. Thread front will fit standard 22.5mm hole.			
Knurled Nut:	Used to attach part to panel. The max recommended torque is 10 in-lbs.			
Weight (Typical):	28 g			
NEMA 3R,4X, & 12:	Approved with use of included gasket.			
cUL Recognition	cUL Recognized			
Options:	Please contact factory.			

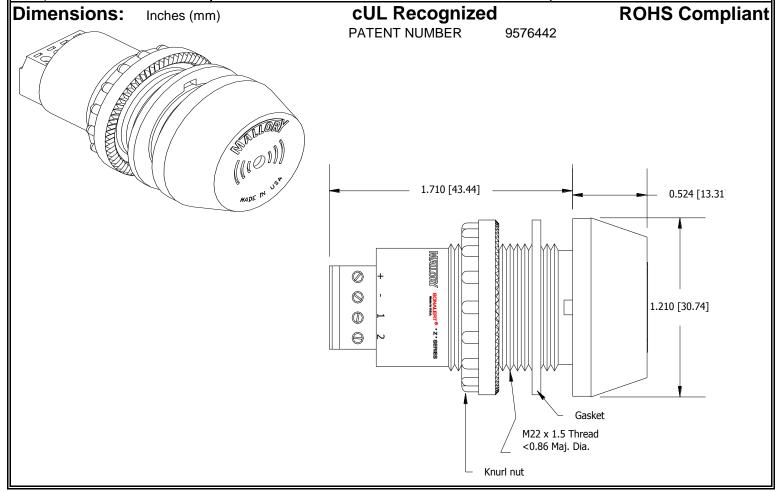

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Piezo Buzzers & Audio Indicators category:

Click to view products by Mallory Sonalert manufacturer:

Other Similar products are found below:

6-4 68S1240-PA MBA-624 FDG06PSLLF FDG111PLF F/NRMB 24 BLACK LF PF-35N29WQ PFD-21A29W PFD-27A35PQ PL-21N30WQ PL-27A35PSQ PLD-21N30WQ PS-531Q PT-3534FP EBPT-401 B822B B/CP28/100DB/BLACK LF PB-1220PEQ S6109 SBM616PR SC110E SC2036ACP SC616N-2 SC628FW SC628MPG SC648D SCS045MD9DT3S ESZ-25B-5-250B FCM12PLF F/EB20P-DR LF F/SMD03A LF FSMD8585JSLF F/SU 21-02 LF F/TCW 12 WITH LABEL LF F/UCW 06 WITH LABEL LF PFD-27N36W PKM22EPPH40S1-B0 PKM35-4A0 PL-35N29WQ PS-552Q CM-5 REF-202 B/SE 128 RED LF KBS-20DA-7AS KBS-27DA-5C-105 LSC628ANR 03-810.001 RTO-1R07-001 PL-21N31PQ