
MALLORY Mallory Sonalert Products, Inc. Sales Outline Drawing Revision: E INDIVIDUAL CONTROL OF LIGHT AND SOUND

Specifications:	INDIVIDUAL CONTROL OF LIGHT AND SOUND	
Function	LIGHT	SOUND
Sound Level Category	N/A	Loud
Mode of Operation	Continuous	Slow Pulse @ 1 PPS
Lens Color	Opaque White	N/A
LED Color	RED	N/A
Rated Voltage	24 VAC/DC	24 VAC/DC
Voltage Range	20 to 28 VAC/DC	20 to 28 VAC/DC
Power Connection	L~ to ~VAC/DC	S~ to ~VAC/DC
Current Draw	25mA MAX	25mA MAX
Frequency	N/A	3900 ± 500 Hz
Loudness @ 2 FT	N/A	85 to 95 dB(A) Typ.
Housing Material	6/6 Nylon, Color: Black	
Front Cap Material	6/6 Nylon, Color: Opaque White	
Storage Temperature	-40° to +80° C	
Operating Temperature	-30° to +65° C	
Panel Mounting	Recommended hole size is 22.5 mm. Thread front will fit standard 22.5mm hole.	
Knurled Nut	Used to attach part to panel. The max recommended torque is 10 in-lbs.	
Weight (Typical)	28 g	
NEMA 3R,4X, & 12	Approved with use of included gasket.	
Options	Please contact factory.	

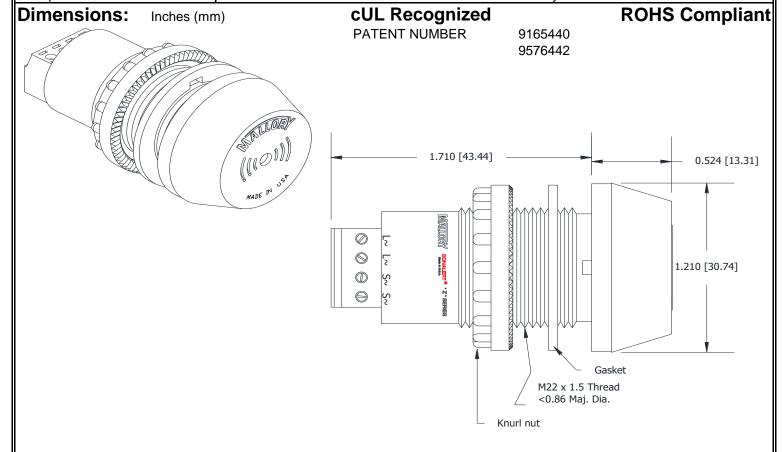

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Piezo Buzzers & Audio Indicators category:

Click to view products by Mallory Sonalert manufacturer:

Other Similar products are found below:

6-4 68S1240-PA MBA-624 FDG06PSLLF FDG111PLF F/NRMB 24 BLACK LF PF-35N29WQ PFD-21A29W PFD-27A35PQ PL-21N30WQ PL-27A35PSQ PLD-21N30WQ PS-531Q PT-3534FP EBPT-401 B822B B/CP28/100DB/BLACK LF PB-1220PEQ S6109 SBM616PR SC110E SC2036ACP SC616N-2 SC628FW SC628MPG SC648D SCS045MD9DT3S FCM12PLF F/EB20P-DR LF F/SMD03A LF FSMD8585JSLF F/SU 21-02 LF F/TCW 12 WITH LABEL LF F/UCW 06 WITH LABEL LF PFD-27N36W PKM22EPPH40S1-B0 PKM35-4A0 PL-35N29WQ PS-552Q CM-5 REF-202 B/SE 128 RED LF KBS-20DA-7AS KBS-27DA-5C-105 LSC628ANR 03-810.001 RTO-1R07-001 PL-21N31PQ B/CP 28B BLACK LF