


FEATURES

- High ripple current & load life 5,000 hours.
- For electronic ballast, power supply.

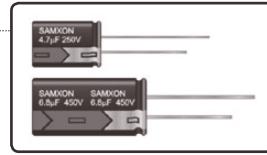

SPECIFICATIONS

Item	Performance Characteristics						
Operating Temperature Range	-40 to +105°C						-25 to +105°C
Rated Working Voltage Range	160 to 400V						450V
Nominal Capacitance Range	1 to 220μF						
Capacitance Tolerance	±20% at 120Hz, +20°C						
Leakage Current	$I \leq 0.02CV + 25 (\mu A)$ after 2 minutes application of rated working voltage at +20°C						
tan δ (120Hz, +20°C)	Working Voltage (V)	160	200	250	350	400	450
	tan δ (max.)	0.15	0.15	0.15	0.20	0.20	0.20
Low Temperature Characteristics	Impedance ratio max. at 120Hz						
	Working Voltage (V)	160	200	250	350	400	450
High Temperature Loading	Z-25°C / Z+20°C	3	3	3	5	5	6
	Test time	5,000 hours					
Shelf Life	Test temperature	+105°C					
	Test conditions	Rated DC working voltage with rated ripple current					
	tan δ	≤ 200% of the initial specified value					
Industrial Standard	At +105°C no voltage applied after 1,000 hours and then being stabilized at +20°C the capacitors shall meet the following limits						
	Leakage current	≤ Initial specified value					
Shelf Life	Cap. change	within ±20% of the initial measured value					
	tan δ	≤ 200% of the initial specified value					
	Industrial Standard	JIS C - 5101-4 (IEC 60384-4)					

CASE SIZE TABLE

ΦD	8 (L<20)	8 (L≥20)	10	12.5	16	18
F	3.5	3.5	5.0	5.0	7.5	7.5
Φd	0.5	0.6	0.6	0.6	0.8	0.8
α	(L<20) 1.5 (L≥20) 2.0					
β	(D<20) 0.5 (D≥20) 1.0					

Safety vent for $\phi \geq 6.3$

Unit : mm


RIPPLE CURRENT MULTIPLIER

Frequency Coefficient

Coefficient Cap (μF)	Freq. (Hz)	120	1k	10k	100k
1~5.6	0.20	0.40	0.80	1.00	
6.8~180	0.40	0.75	0.90	1.00	
≥220	0.50	0.85	0.94	1.00	

PART NUMBER SYSTEM (EXAMPLE : 250V 22μF)

1	2 3	4 5 6	7	8 9	10	11 12	13 14
E	RT	226	M	2E	G	20	RR

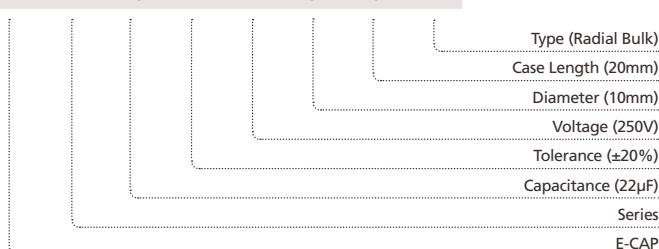

STANDARD RATINGS

Voltage (Code)		160V (2C)		200V (2D)		250V (2E)		350V (2V)	
Cap. (μF)	Code	Case Size	Ripple Current						
4.7	475					8 x 12	160	10 x 12.5	150
5.6	565							10 x 12.5	180
6.8	685			8 x 12	204	8 x 12	215	10 x 16	280
						10 x 12.5	250		
10	106	10 x 16	320	10 x 16	320	10 x 16	320	10 x 20	350
22	226	10 x 20	500	10 x 16	453	10 x 16	453	12.5 x 20	650
				10 x 20	500	10 x 20	500		
33	336	10 x 20	650	10 x 16	589	10 x 16	640	16 x 20	900
				10 x 20	650	12.5 x 20	800		
47	476	10 x 20	750	12.5 x 20	980	12.5 x 20	980	16 x 20	1080
							1200*		
68	686	12.5 x 20	1180	12.5 x 25	1300	16 x 20	1300	18 x 25	1470
				16 x 20	1300				
82	826			16 x 20	1380	16 x 20	1380	18 x 25	1530
100	107	12.5 x 25	1420	16 x 20	1420	16 x 25	1530		
		16 x 20	1420						
150	157	16 x 25	1890	16 x 25	1890	18 x 25	1940		
220	227	18 x 25	2370	18 x 30	2648				

Maximum Allowable Ripple Current (mA rms) at 105°C 100kHz

Case Size ϕ D x L (mm)

Voltage (Code)		400V (2G)			450V (2W)		
Cap. (μF)	Code	Case Size	Ripple Current	Case Size	Ripple Current		
1	105	8 x 12	60				
		8 x 12	90				
1.5	155	10 x 12.5	100				
		8 x 12	95				
1.8	185	10 x 12.5	120				
		8 x 12	95				
2.2	225	10 x 12.5	140	8 x 12	105		
		8 x 12	140				
3.3	335	10 x 12.5	150				
		8 x 12	130				
4.7	475	8 x 12	171	8 x 16	176		
		10 x 16	220	10 x 20	220		
5.6	565	10 x 16	250	10 x 20	250		
6.8	685	10 x 16	280	10 x 12.5	228		
				10 x 20	280		
10	106	10 x 16	317	10 x 20	397		
		10 x 20	350	12.5 x 20	450		
15	156	12.5 x 25	487	12.5 x 25	600		
		12.5 x 20	550				
22	226	12.5 x 20	760	12.5 x 25	698		
				16 x 20	730		
33	336	12.5 x 25	861	16 x 20	891		
		16 x 20	900	16 x 25	980		
		12.5 x 25	1027	16 x 25	1121		
47	476	16 x 20	1073	18 x 20	1093		
		16 x 25	1180	18 x 25	1200		
		18 x 20	1180				
		16 x 25	1374				
68	686	16 x 30	1488				
		18 x 25	1470				


Maximum Allowable Ripple Current (mA rms) at 105°C 100kHz

Case Size ϕ D x L (mm)


* Special item with higher ripple current.

Specifications are subject to change without notice. Should a safety or technical concern arise regarding the product, please be sure to contact our sales offices or agents immediately.

TEMPERATURE CHARACTERISTICS

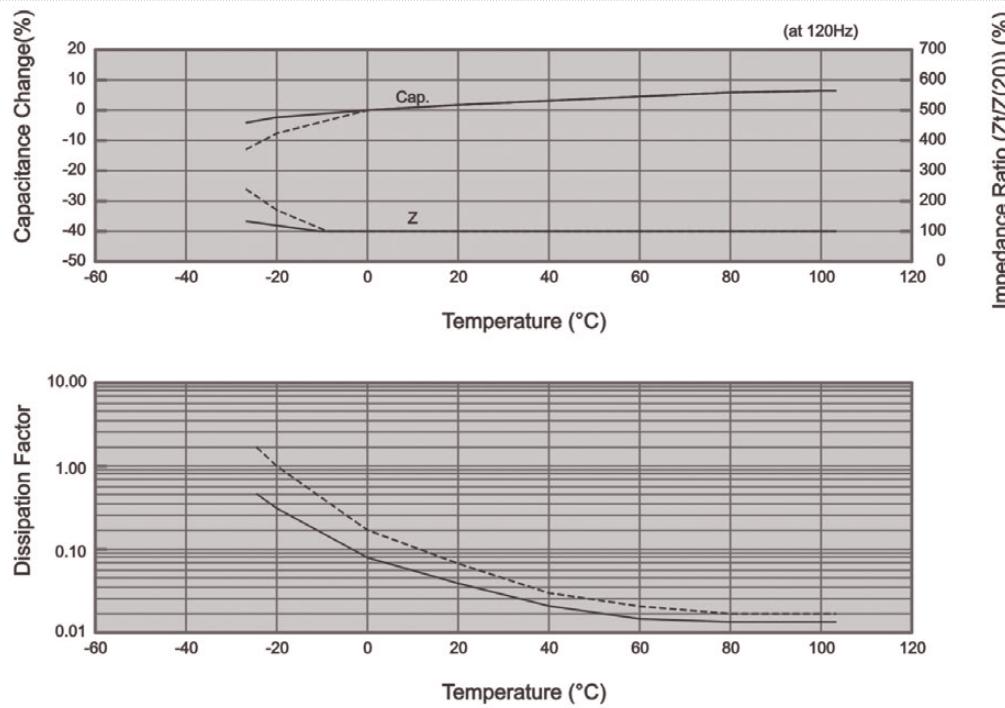

ENDURANCE

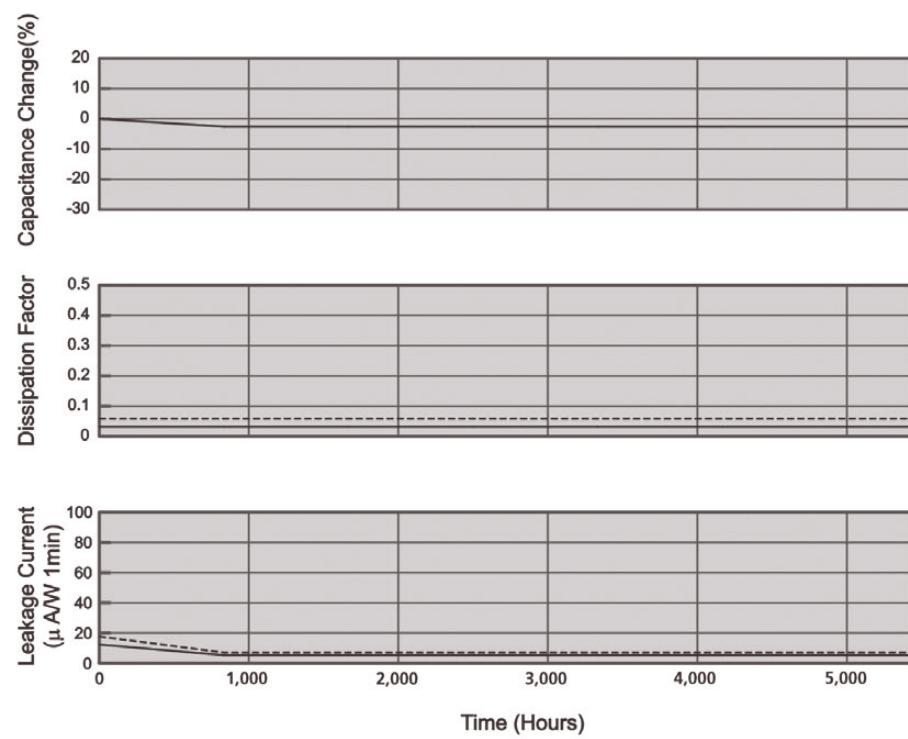

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Aluminum Electrolytic Capacitors - Leaded category:

Click to view products by Man Yue manufacturer:

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [MAL203125221E3](#) [MAL204216159E3](#) [ESMG101ETD100MF11S](#) [RBC-25V-10UF-4X7](#) [RE3-35V222MJ6#](#) [RFO-100V471MJ7P#](#) [B41041A2687M8](#) [B41041A7226M8](#) [B41044A7157M6](#) [EKRG250ELL100MD07D](#) [EKXG201EC3101ML20S](#) [EKXG351ETD6R8MJ16S](#) [EKZM160ETD471MHB5D](#) [EPA-201ELL151MM25S](#) [NCD681K10KVY5PF](#) [NRLF103M25V35X20F](#) [KM4700/16](#) [KME50VB100M-8X11.5](#) [RXJ222M1EBK-1625](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESX472M16B](#) [MAL211929479E3](#) [40D506F050DF5A](#) [TE1202E](#) [36DA273F050BB2A](#) [KME25VB100M-6.3X11](#) [511D336M250EK5D](#) [511D337M035CG4D](#) [515D477M035CG8PE3](#) [052687X](#) [EKMA500ELL4R7ME07D](#) [EKRG100ETC221MF09D](#) [NRE-S560M16V6.3X7TBSTF](#) [ERZA630VHN182UP54N](#) [MAL214099813E3](#) [MAL211990518E3](#) [MAL204281229E3](#) [NEV680M35EF](#) [686KXM050M](#) [ERS1VM222L30OT](#) [EGW2GM150W16OT](#) [EGS2GM6R8G12OC](#) [EHS2GM220W20OT](#) [ERF1VM222L30OT](#) [ERF1KM151G20OT](#) [EKZE500ELL101MHB5D](#) [EKMM251VSN221MP25S](#) [RGA221M1HBK-1016G](#)