

## Sensitivity Wavelength Range: 250-1100nm


The MT03-026 is a circular ( $\varnothing 2.52$ ) 5mm<sup>2</sup> active area Silicon Photodiode in an isolated, hermetic TO-5 metal can package with a UV transmitting glass window. It is optimized for applications requiring high sensitivity in the 300 to 560nm region (UVA, Blue & Green).

### Features

- > Ultra Low Noise
- > High Shunt Resistance
- > Wide Dynamic Range
- > 365nm & Blue/Green Enhanced

### Applications

- > Flame Detection
- > Currency Authentication
- > Spectroscopy Equipment
- > Fluorescence

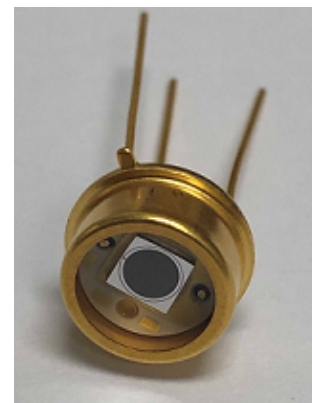

## Absolute Maximum Ratings




Items	Symbol	Rating	Unit
Reverse Voltage	V <sub>R</sub>	50	V
Operating Temperature Range	T <sub>opr</sub>	-40 ~ +100	°C
Storage Temperature Range	T <sub>stg</sub>	-55 ~ +125	°C
Lead Soldering Temperature*1	T <sub>ls</sub>	260	°C

\*1: Time 5 Sec max, Position: Up to 3mm from the body.

## Electrical & Optical Characteristics (T<sub>a</sub> = 23°C)


Items	Symbol	Conditions	MIN	TYP	MAX	Unit
Dark Current	I <sub>d</sub>	V <sub>R</sub> =5V	--	0.05	0.5	nA
Breakdown Voltage	V <sub>(BR)</sub>	I <sub>R</sub> =10μA	50	--	--	V
Spectral Sensitivity	λ	--	--	250-1100	--	nm
Peak Sensitivity	λ <sub>p</sub>	--	--	950	--	nm
Wavelength Responsivity	R	V <sub>R</sub> =0V, λ=365nm	--	0.22	--	A/W
Responsivity	R	V <sub>R</sub> =0V, λ=633nm	--	0.40	--	A/W
Response Time @635nm	T <sub>r</sub>	R <sub>L</sub> =50Ω, V <sub>R</sub> =5V	--	20	--	ns
Junction Capacitance	C <sub>j</sub>	@ 1MHz, V <sub>R</sub> =0V	--	80	--	pF
Junction Capacitance	C <sub>j</sub>	@ 1MHz, V <sub>R</sub> =5V	--	18	25	pF
Shunt Resistance	R <sub>sh</sub>	V <sub>R</sub> =10mV	500	800	--	MΩ

TO-5 Package Dimensions (3 Pin)

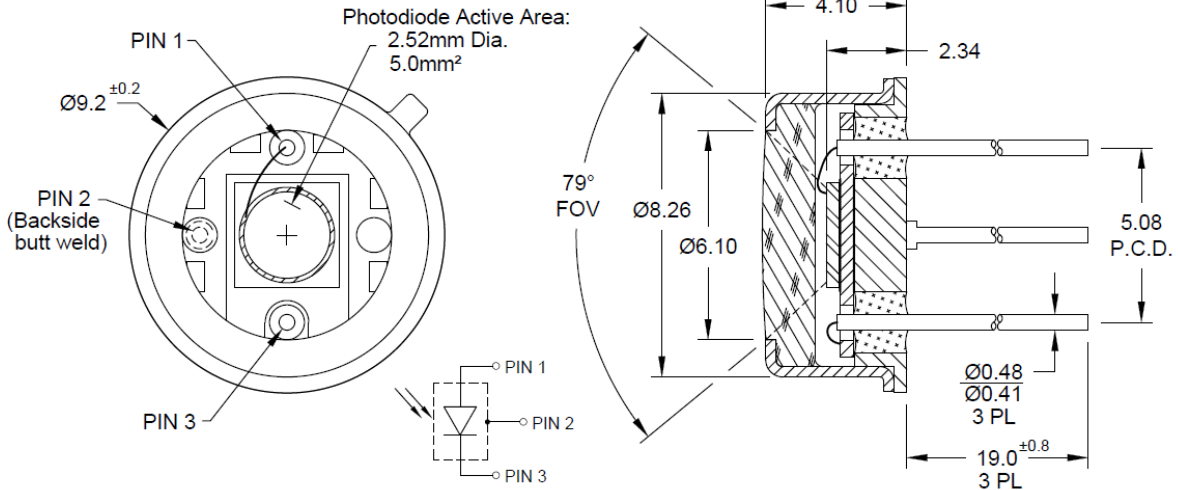


Unit: mm, Tolerance: ±0.15


Capacitance vs Reverse Bias

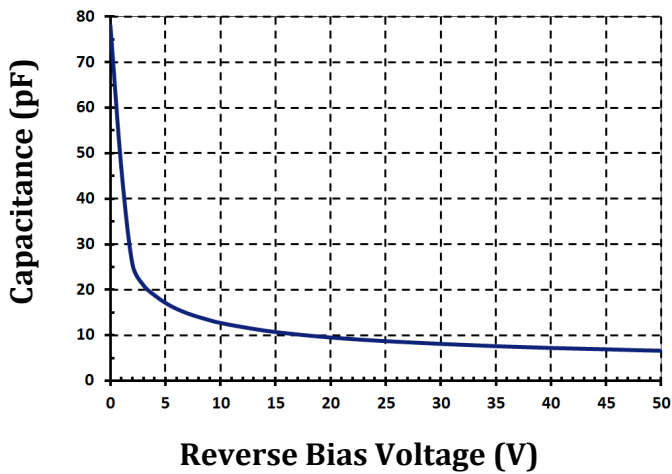


Dark Current vs Reverse Bias (23°C)

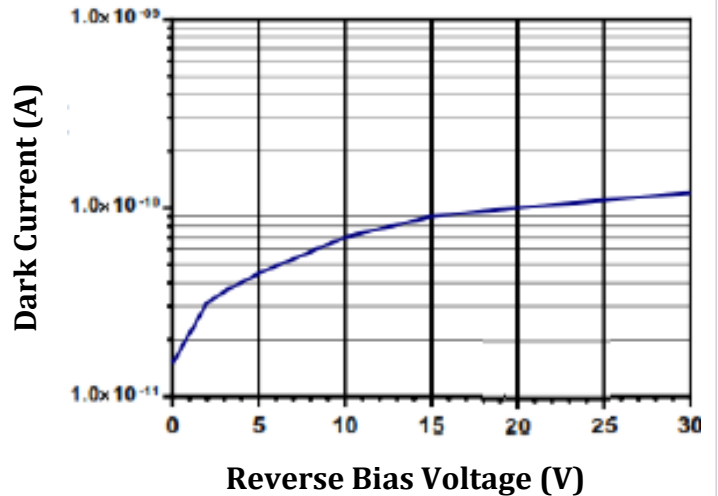


Dark Current vs Temperature ( $V_r=10V$ )

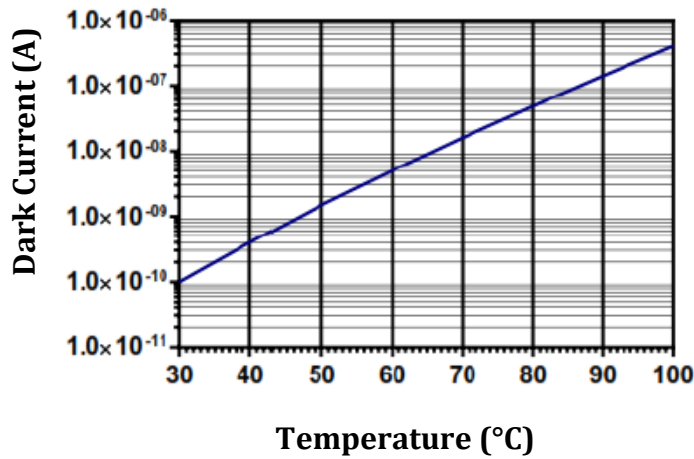

Series 4 Quantum Efficiency (23°C)

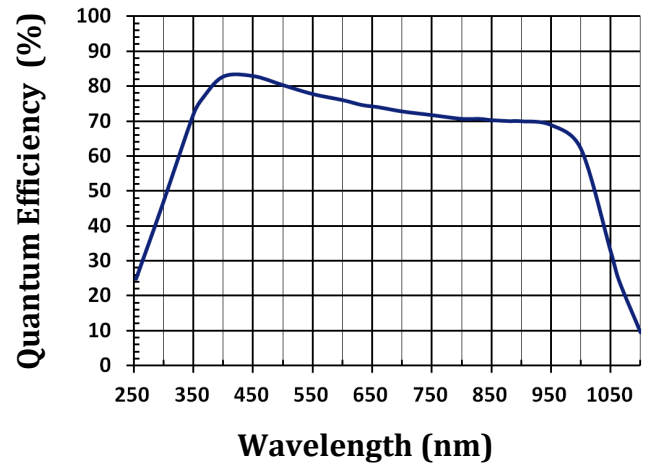


Photodiode Responsivity by Series

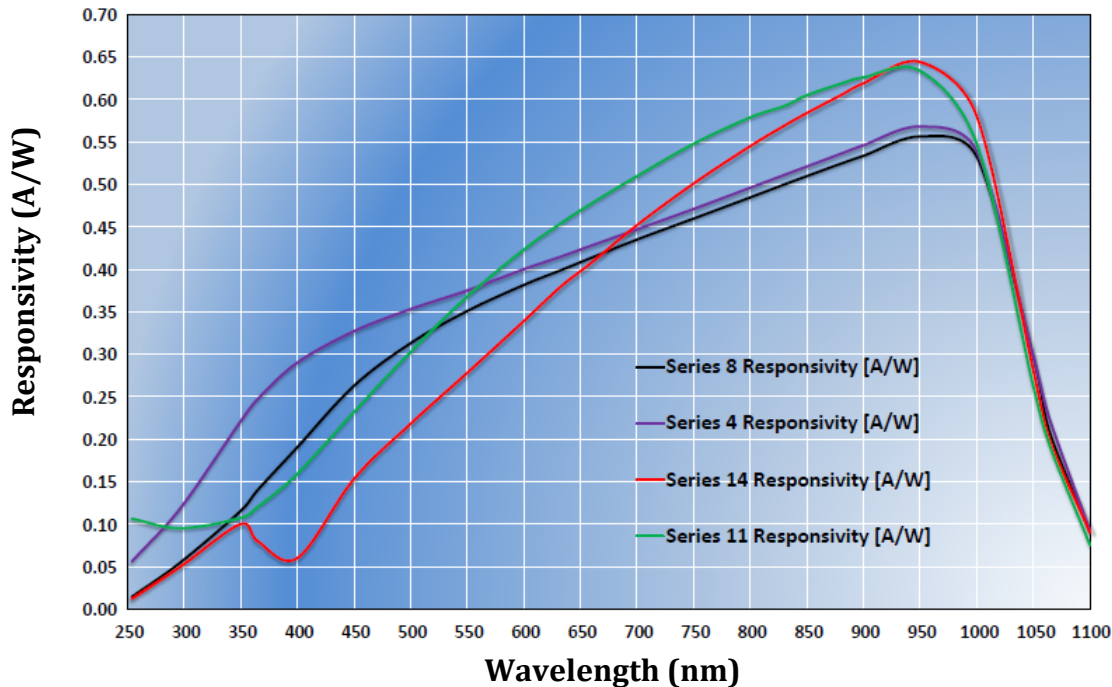

The information contained herein is subject to change without notice.

2020-04-14

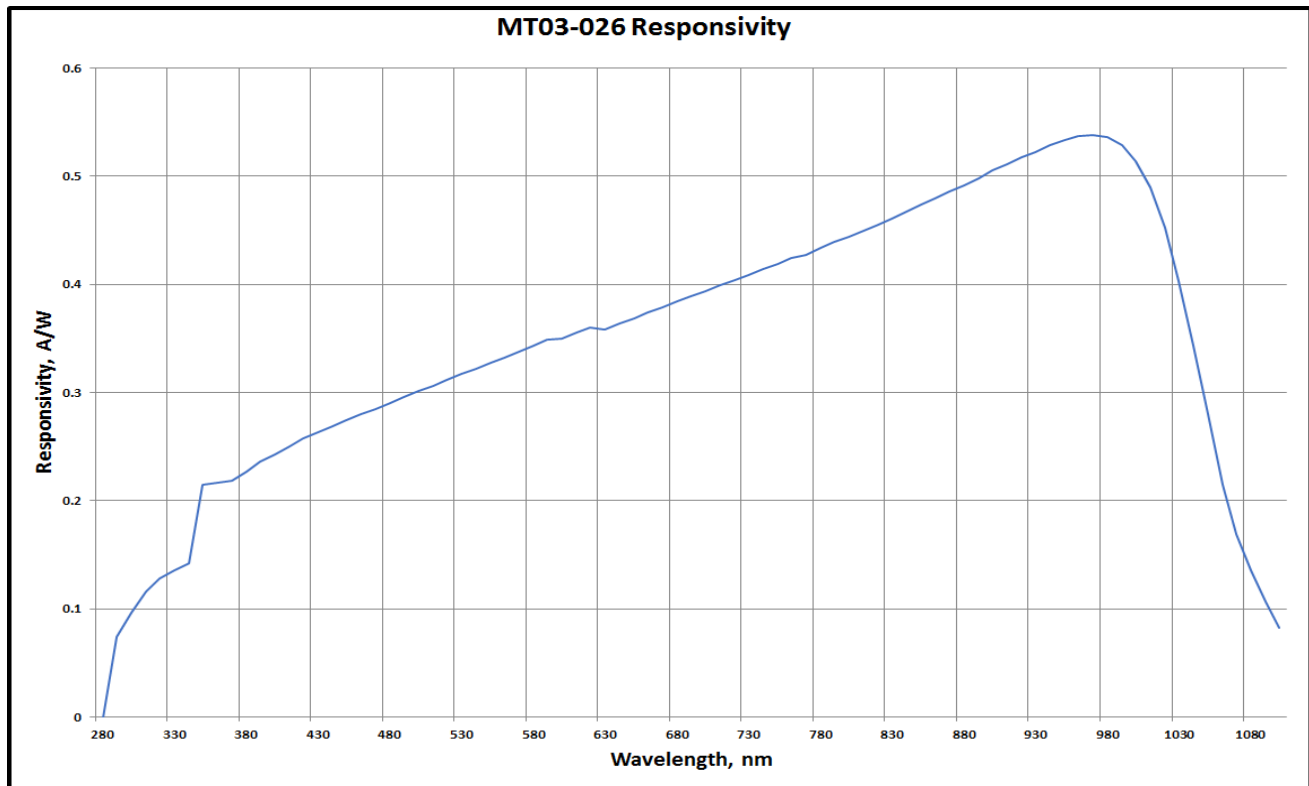

The information contained herein is subject to change without notice.

2020-04-14

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Photodiodes](#) category:*

*Click to view products by [Marktech](#) manufacturer:*

Other Similar products are found below :

[LTR-526AD](#) [OED-SP-7L](#) [LTR-536AB](#) [LTR-743DBM1-TA](#) [67-21SYGC-S349-TR8](#) [SFH 2200 A01](#) [HFD3081-108-XBA](#) [BPW 34 S E9601](#)  
[SFH 2713](#) [SFH 2703](#) [LTR-546AD](#) [BPV23FL](#) [BPW 34 FAS](#) [BPW 34 FS](#) [IG17X1000S4I](#) [IG22X250S4I](#) [VTD205H](#) [VTD205KH](#)  
[VTP1232FH](#) [VTP4085H](#) [SFH 2400](#) [OP913WSL](#) [OPF794](#) [PD70-01C/TR7](#) [LTR-536AD](#) [VTP8651H](#) [VTD206KH](#) [VTB1013H](#) [BPV23NF](#)  
[OP905](#) [LTR-516AD](#) [BPW 34 FS-Z](#) [VTD34FH](#) [QSB34CGR](#) [SFH 2500 FA](#) [PD15-22C/TR8](#) [VEMD5510C](#) [SFH 2200](#) [VEMD5510CF](#)  
[SAH230M](#) [SAH230M2](#) [SAH500M2](#) [MTAPD-07-010](#) [BP 104 FS](#) [BPV22F-AS12](#) [BPW 21](#) [BPW 34 SR-Z](#) [BPX 65](#) [HSDL-5400#011](#) [BPW](#)  
[34 FASR](#)