


## Cree XB-D Color Series

Cree XLamp XB-D color LEDs extend the double lumens-per-dollar performance of the XB package to color LEDs, delivering up to 40% higher maximum light output than XP-E color LEDs. The combination of performance and small size of XB-D color LEDs enable better color mixing and lower system cost.

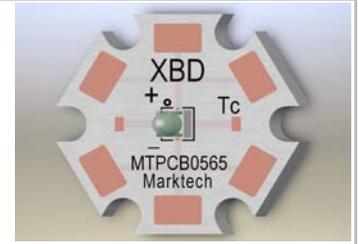

### FEATURES

- > Cree's smallest lighting class LED: 2.45 x 2.45 mm
- > 1A Maximum Drive Current
- > Wide viewing angle: 115°(white) to 140° (red)
- > Electrically Neutral Thermal Path

### APPLICATIONS

- > Non-Directional
- > Directional
- > Downlight
- > Consumer Portable

### FLUX CHARACTERISTICS @ 85°C

COLOR	DWL (nm)	MIN.FLUX (LM) @350MA	KIT USED
Blue	465-485	35.2	0Z01
Green	520-535	93.9	0B01
Red-Orange	610-620	80.6	0901
Red	620-630	67.2	0701

CHARACTERISTICS	UNIT	MINIMUM	TYPICAL	MAXIMUM
Thermal resistance, junction to solder point - white, royal blue, blue	°C/W		6.5	
Thermal resistance, junction to solder point - green	°C/W		11	
Thermal resistance, junction to solder point - amber	°C/W		7	
Thermal resistance, junction to solder point - red-orange, red	°C/W		5	
Viewing angle (FWHM) - white	degrees		115	
Viewing angle (FWHM) - royal blue, blue, green	degrees		135	
Viewing angle (FWHM) - amber, red-orange, red	degrees		140	
Temperature coefficient of voltage - white	mV/°C		-2.5	
Temperature coefficient of voltage - royal blue, blue, green	mV/°C		-3.3	
Temperature coefficient of voltage - amber, red-orange, red	mV/°C		-2	
ESD classification (HBM per Mil-Std-883D)			Class 2	
DC forward current	mA			1000
Reverse voltage	V			-5
Forward voltage (@ 350 mA, 85 °C) - white	V		2.9	3.5
Forward voltage (@ 350 mA, 25 °C) - royal blue, blue	V		3.1	3.7
Forward voltage (@ 350 mA, 25 °C) - green	V		3.3	3.9
Forward voltage (@ 350 mA, 25 °C) - amber, red-orange, red	V		2.25	2.6
LED junction temperature	°C			150

It is highly recommended for the user to review the CREE XBD Series page for additional and most recent technical data at:  
<http://www.cree.com/led-components-and-modules/products/xlamp/discrete-directional/xlamp-xbd>

- \* Exceeding maximum ratings may damage the LED and cause potential safety hazards.
- \* Elevated operating temperatures can be expected to negatively impact the service life (lumen output)
- \* All data is related to entire assembly. Data reflects statistical mean values. Actual data may differ depending on variances in the manufacturing process.
- \* End users need to take into account the lumen depreciation as the temperature rises with various thermal solutions installed.

Note 1: Using continuously under elevated loads (i.e. the application of high temperature/current/voltage or a significant change in temperature, etc.) may cause this product to significantly decrease in reliability even if the operating conditions are within the absolute maximum ratings.

Note 2: The thermal resistance from the LED junction to ambient temperature,  $R_{th(j-a)}$ , should be kept below  $10^{\circ}\text{C/W}$  so that the LED is not exposed to a condition beyond the absolute maximum ratings.

Note 3: The temperature of the LED assembly must be measured at the TC-point according to EN60598-1 in a thermally constant status with a temperature sensor or a temperature sensitive label.

#### **Hardware (not included)**

- > Mount with #4 Machine Screws.
- > 16AWG Maximum Wire Gauge.
- > Use only with constant current power supplies.

#### **PCB Fabrication**

- > Layer Count: 1
- > Core Material: 6061-T6 Aluminum
- > Single Layer Copper Weight: 1oz
- > Solder Mask: White
- > Finishing Plating: Pb Free HASL

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [marktech](#) manufacturer:*

Other Similar products are found below :

[MTAPD-07-014](#) [MTE5066CJ-UR](#) [MTPS8085NJ1](#) [MT3700W3-UV](#) [MTE280F13-UV](#) [MTE5052W-UBG](#) [MTE8560P](#) [MTE8760NJ2](#) [MTG7-001I-XBD00-BL-0Z01](#) [MTD3010N](#) [MTE310H41-UV](#) [MTE340H33-UV](#) [MTAPD-06-014](#) [MTE5057N-UYG](#) [MTMS7700T38](#) [MTPS9067MC](#) [MTE5066WSC-UR](#) [MTAPD-07-010](#) [MTE310H32-UV](#) [MTE9460N1](#) [MTE325F13-UV](#) [MTE6000N](#) [MTE6000L-HP](#) [MTE9460N5](#) [MTAPD-07-012](#) [MTAPD-07-016](#) [MTE325H32-UV](#) [MTE4064PT-UR](#) [MTPS3085MT](#) [MTPS9067WC](#) [MTE5052N-UBG](#) [MTE5900M3A-UY](#) [MTG7-001I-XQB00-CW-L053](#) [MTPS8085PT](#) [MTAPD-07-007](#) [MTE310H33-UV](#) [MTPS8085CP](#) [MTE310H21-UV](#) [MTD1114M3B](#) [MTD6100PT](#) [MTE340F13-UV](#) [MTAPD-07-003](#) [MTE325H41-UV](#) [MTAPD-06-009](#) [MTE3061N-UO](#) [MTPS3085WS](#) [MTAPD-06-006](#) [MTAPD-06-010](#) [MTE9460N2](#) [MTE1300N](#)