

EST100BN120SN

Ultra-Fast Soft Recovery Diode Module


Equivalent Circuit and Package

Features

- Repetitive Reverse Voltage : $V_{RRM} = 1200V$
- Low Forward Voltage Drop : $V_F(\text{typ.}) = 1.6V$
- Average Forward Current : $I_F(\text{AV.}) = 100A @ T_c = 100^\circ C$
- Ultra-Fast Reverse Recovery Time : $t_{rr}(\text{typ.}) = 180 \text{ ns}$
- Extensive Characterization of Recovery Parameters
- Reduced EMI and RFI
- Isolation Type Package

Applications

- Welding Machine
- Induction Heating
- UPS

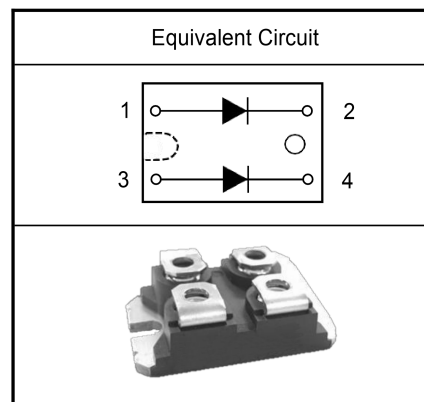

Absolute Maximum Ratings @ $T_c=25^\circ C$ (Per Leg)

Symbol	Parameter	Conditions	Ratings	Unit
V_{RRM}	Repetitive Peak Reverse Voltage		1200	V
$V_{R(DC)}$	Reverse DC Voltage		960	V
$I_{F(AV)}$	Average Forward Current	$T_c = 25^\circ C$	200	A
		$T_c = 100^\circ C$	100	A
$I_{FSM}^{(1)}$	Surge(non-repetitive) Forward Current	One Half Cycle at 60Hz, Peak Value	1400	A
I^2_t	I^2t for Fusing	Value for One Cycle Current, $t_w = 8.3ms, T_j = 25^\circ C$ Start	8.13×10^3	A^2s
$T_j^{(2)}$	Junction Temperature	-	-40 ~ 125	$^\circ C$
T_{stg}	Storage Temperature	-	-40 ~ 125	$^\circ C$
V_{isol}	Isolation Voltage	@ AC 1 minutes	2500	V
P_d	Maximum Power Dissipation		337	W
-	Mounting screw torque	M4	1.45	N.m
-	Mounting terminals screw torque	M4	1.45	N.m

(Note *1) Repetitive rating : Pulse width limited by max junction temperature

(Note *2) The maximum junction temperature of chip is $150^\circ C$

Electrical Characteristics of FRD @ $T_c=25^\circ\text{C}$ (unless otherwise specified)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit	
V_R	Cathode Anode Breakdown Voltage	$I_R = 100\mu\text{A}$	1200	-	-	V	
V_{FM}	Maximum Forward Voltage	$I_{FM} = 100\text{A}$	$T_j = 25^\circ\text{C}$	-	1.6	1.95	V
			$T_j = 125^\circ\text{C}$	-	1.6	-	
I_{RRM}	Repetitive Peak Reverse Current	$T_C = 100^\circ\text{C}$, V_{RRM} applied	-	-	2.0	mA	
t_{rr}	Reverse Recovery Time	$I_{FM} = 100\text{A}$, $V_R = 600\text{V}$ $di/dt = -1000\text{A}/\mu\text{s}$	$T_j = 25^\circ\text{C}$	-	180	220	ns
			$T_j = 125^\circ\text{C}$	-	240	-	

Thermal Characteristics and Weight

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
$R_{\theta JC}$	Junction-to-Case	per FRD	-	-	0.37	$^\circ\text{C}/\text{W}$
Weight	Weight of Module		-	-	30	g

Performance Curves

Fig. 1 Typical Forward Voltage Drop vs. Instantaneous Current

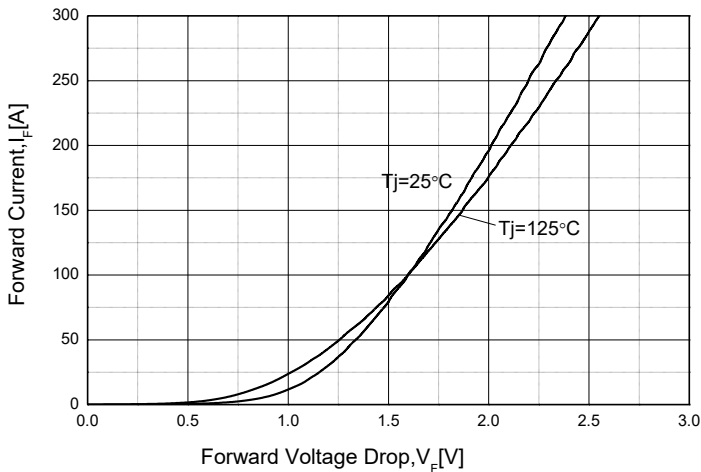


Fig. 2 Typical Reverse Recovery Time vs. $-di/dt$

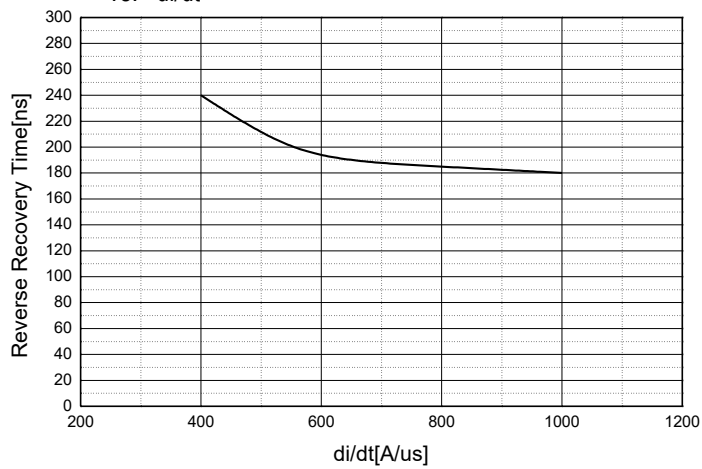


Fig. 3 Transient Thermal Impedance (Z_{thjc}) Characteristics



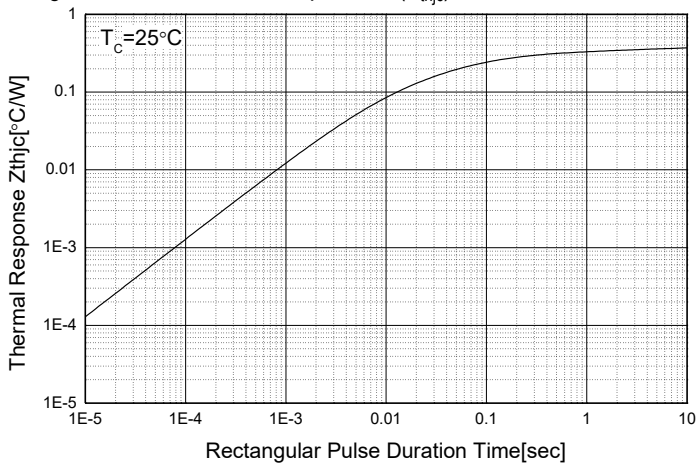


Fig. 4 Forward Current Derating Curve

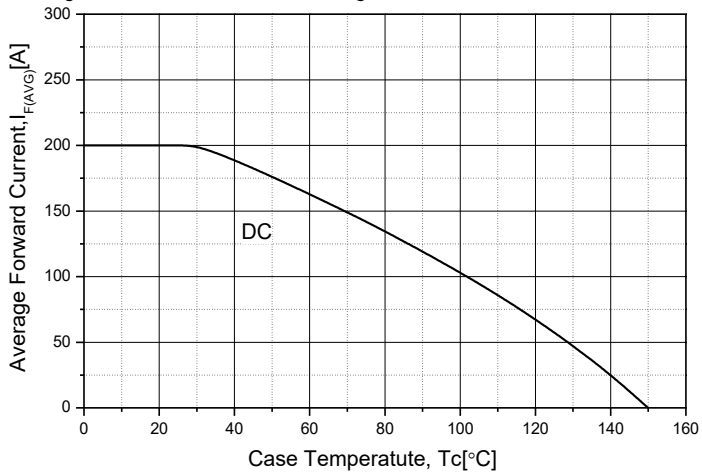

■ Package Out Line Information

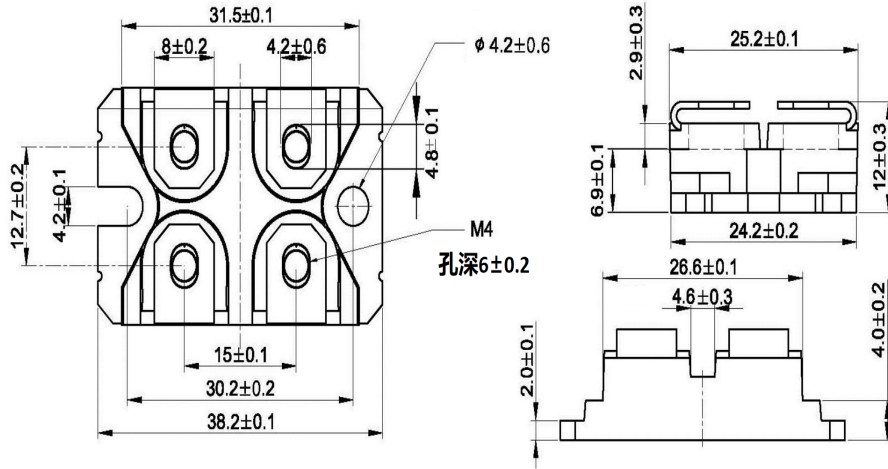

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Rectifiers](#) category:

Click to view products by [MASPOWER](#) manufacturer:

Other Similar products are found below :

[70HFR40](#) [FR105 R0](#) [RL252-TP](#) [1N5397](#) [JANTX1N5634A](#) [1N4005-TR](#) [1N4007-BP](#) [UFS120Je3/TR13](#) [20ETS12S](#) [RRE02VS6SGTR](#)
[MS306](#) [A1N5404G-G](#) [CRF02\(T5L,TEMQ\)](#) [ACGRB207-HF](#) [CLH07\(TE16L,Q\)](#) [CLH03\(TE16L,Q\)](#) [1N5395-TP](#) [UES1302](#) [ACGRC307-HF](#)
[ACEFC304-HF](#) [DZ-1380](#) [85HFR60](#) [40HFR60](#) [70HF120](#) [85HFR80](#) [SCF7500](#) [SM100](#) [ACGRA4001-HF](#) [SKN70/08](#) [SKR70/08](#) [NTE5819](#)
[NTE5827](#) [NTE5828](#) [NTE5911](#) [NTE5915](#) [NTE6104](#) [NTE6163](#) [NTE6164](#) [NTE6165](#) [NTE6364](#) [TSD3G](#) [SET130312](#) [NRVUS110VT3G](#)
[UES1106](#) [UES1306](#) [NRVUS240VT3G](#) [D5FE60-5063](#) [R4000GPS-TP](#) [D4015L56TP](#) [UES1306HR2](#)