



Features

- N-Channel, Low $R_{DS(on)}$
- High Current Handling Capability
- Fast Intrinsic Diode
- Avalanche Rated



Applications

- DC-DC Converter
- UPS
- AC Motor Drives
- Battery Chargers
- Switched-Mode and Resonant-Mode Power Supplies



Absolute Ratings ($T_c=25^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DSS}	650	V
Drain Current -continuous	I_D	170	A
Drain Current - pulse*	I_{DM}	340	A
Gate-Source Voltage	V_{GSS}	± 30	V
Single Pulsed Avalanche Energy	E_{AS}	5	J
Power Dissipation	PD	860	W
Operating and Storage Temperature Range	T_j, T_{STG}	$-55 \sim +150$	$^\circ\text{C}$
Maximum Lead Temperature for Soldering Purposes	T_L	300	$^\circ\text{C}$

*Drain current limited by maximum junction temperature

Electrical Characteristics ($T_{CASE}=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Tests conditions	Min	Type	Max	Units
Off-Characteristics						
Drain-Source Voltage	BV_{DSS}	$I_D=3\text{mA}, V_{GS}=0\text{V}$	650	-	-	V
Drain cut-off current	I_{DSS}	$V_{DS}=650\text{V}, V_{GS}=0\text{V}$ $T_j=25^\circ\text{C}$	-	-	50	μA
Gate-body leakage current, forward	I_{GSSF}	$V_{DS}=0\text{V}, V_{GS}=30\text{V}$	-	-	200	nA
Gate-body leakage current, reverse	I_{GSSR}	$V_{DS}=0\text{V}, V_{GS}=-30\text{V}$	-	-	-200	nA

On-Characteristics						
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=250\mu A$	3.0	-	5.0	V
Static Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS}=10V, I_D=35A$	-	18	-	m Ω
Forward transconductance	Gfs	$V_{DS}=10V, I_D=60A$	-	90	-	S
Dynamic Characteristics						
Input capacitance	Ciss	$V_{DS}=25V,$ $V_{GS}=0V,$ $f=1MHz$	-	25	-	nF
Output capacitance	Coss		-	15	-	nF
Reverse transfer capacitance	Crss		-	10	-	pF
Switching Characteristics						
Turn-On delay time	$t_{d(on)}$	$V_{DD}=325V, I_D=85A$ $R_g=1\Omega$	-	60	-	ns
Turn-On rise time	t_r		-	13	-	ns
Turn-Off delay time	$T_{d(off)}$		-	120	-	ns
Turn-Off Fall time	t_f		-	5	-	ns
Total Gate Charge	Qg	$V_{DS}=325V,$ $I_D=85A,$ $V_{GS}=10V$	-	360	-	nC
Gate-Source charge	Qgs		-	135	-	nC
Gate-Drain charge	Qgd		-	98	-	nC
Drain-Source Diode Characteristics and Maximum Ratings						
Drain-Source Diode Forward Voltage	V_{SD}	$V_{GS}=0V, I_S=100A,$ (note1)	-	-	1.4	V
Maximum Continuous Drain-Source Diode Forward Current		I_S	-	170	-	A
Reverse recovery time	t_{rr}	$I_F=85A$ $dI_F/dt=100A/\mu s$ $VR=100V$	-	200	-	ns
Reverse recovery charge	Qrr		-	750	-	nC







Thermal Characteristic







Parameter	Symbol	Value	Unit
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	0.145	$^{\circ}C/W$

Notes:

1. Pulse test, $t \leq 300\mu s$, duty cycle, $d \leq 2\%$.

Typical Electrical and Thermal Characteristics (Curves)

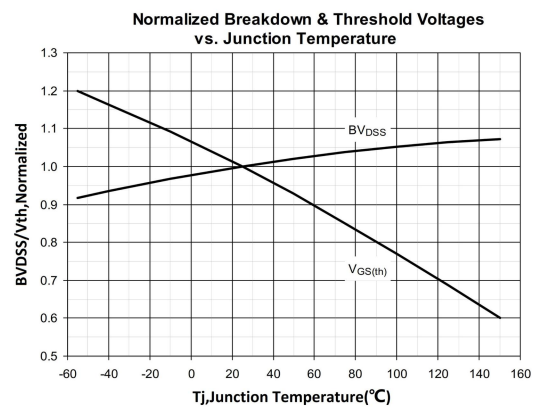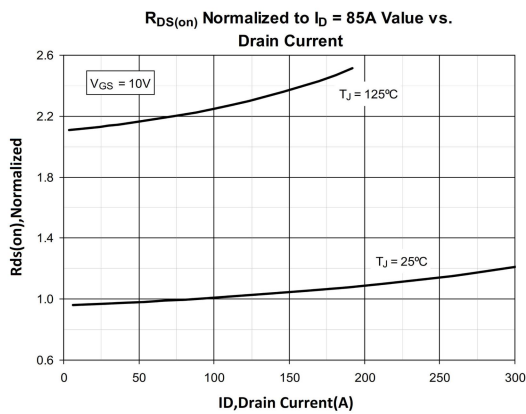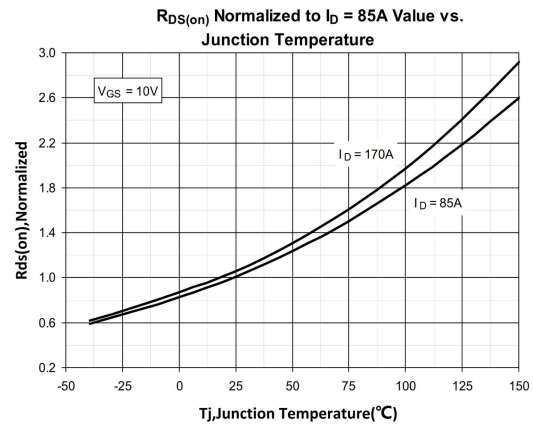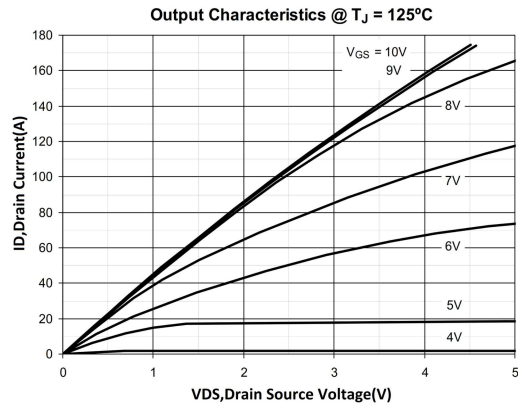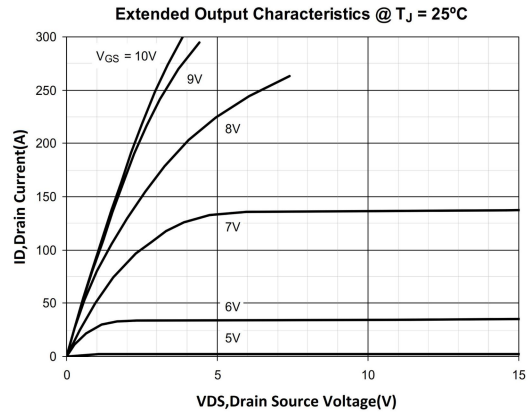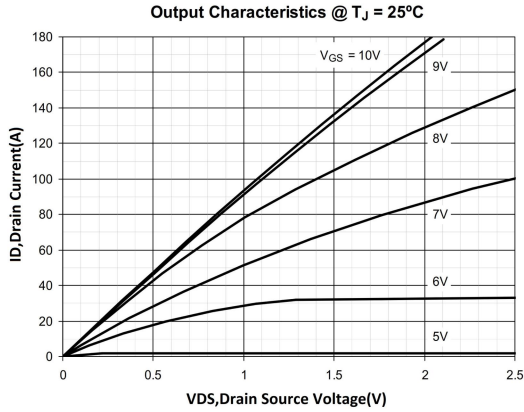

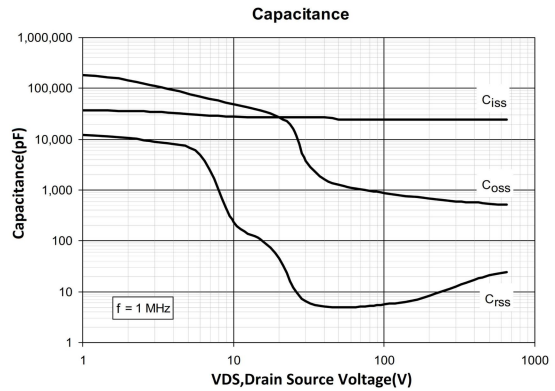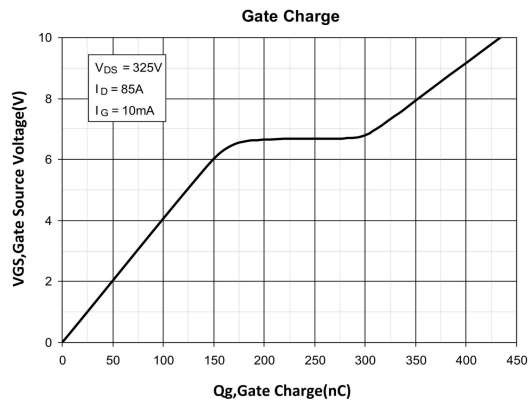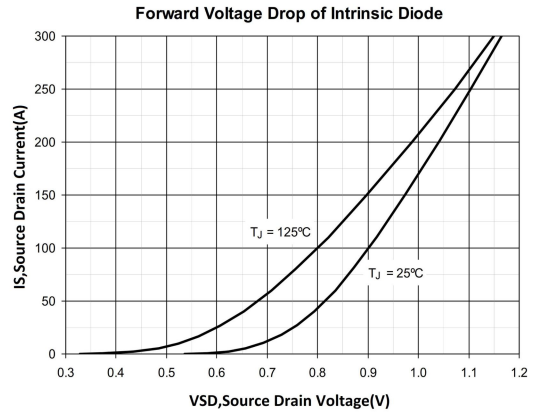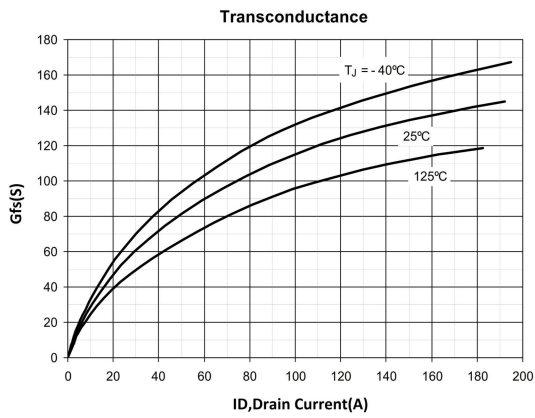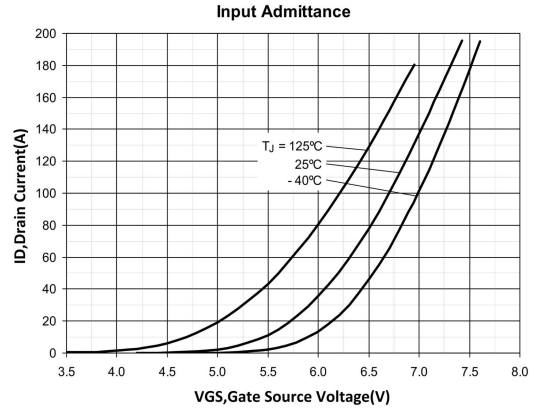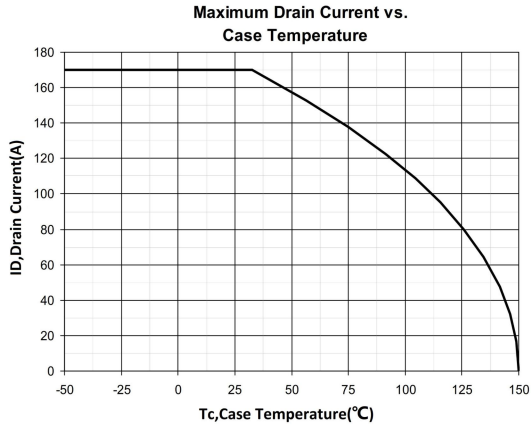

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [MASPOWER](#) manufacturer:

Other Similar products are found below :

[IRFD120](#) [IRFY240C](#) [JANTX2N5237](#) [2SK2267\(Q\)](#) [BUK455-60A/B](#) [MIC4420CM-TR](#) [VN1206L](#) [NDP4060](#) [SI4482DY](#)
[IPS70R2K0CEAKMA1](#) [SQD23N06-31L-GE3](#) [TK16J60W,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [EFC2J004NUZTDG](#)
[DMN1053UCP4-7](#) [SQJ469EP-T1-GE3](#) [NTE2384](#) [DMC2700UDMQ-7](#) [DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#)
[DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#)
[DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [DMTH10H4M6SPS-13](#) [DMN2990UFB-7B](#) [IPB80P04P405ATMA2](#) [2N7002W-G](#) [MCAC30N06Y-](#)
[TP](#) [MCQ7328-TP](#) [NTMC083NP10M5L](#) [NVMFS2D3P04M8LT1G](#) [BXP7N65D](#) [BXP4N65F](#) [AOL1454G](#) [WMJ80N60C4](#) [BXP2N20L](#)
[BXP2N65D](#) [BXT1150N10J](#) [BXT1700P06M](#) [TSM60NB380CP](#) [ROG](#) [RQ7L055BGTCR](#) [DMNH15H110SK3-13](#)