


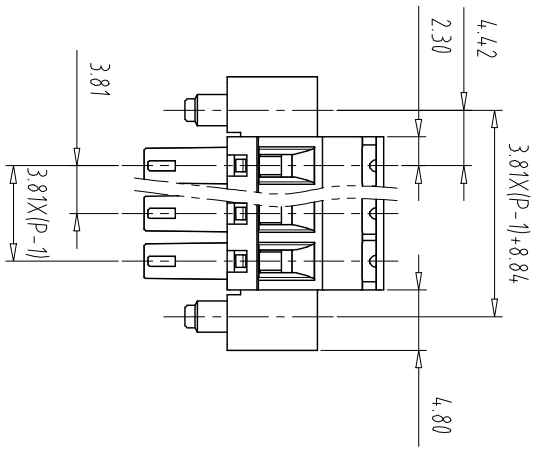


注：本板为禁止运输、复制、编辑文件，以及用其内容进行交流

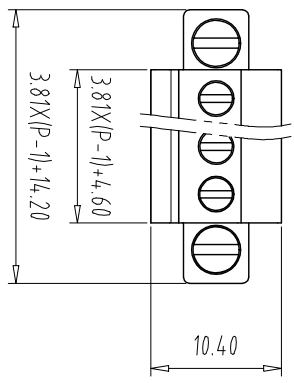

| REV | ECN NO. | CONTENT | CHK | DATE |
|-----|---------|---------|-----|------|
| | | | | |

NOTES:

UL Standard

| Use group | B | C | D |
|---------------|------|---|------|
| Rated Current | 8A | / | 8A |
| Rated Voltage | 300V | / | 300V |

1. Wire range: 28~16AWG

IEC Standard

| Pollution Degree | 3 | 2 | 2 |
|--------------------------|-------|-------|-------|
| Overvoltage Category | III | III | II |
| Rate Impulse Voltage(KV) | 2.5KV | 2.5KV | 2.5KV |
| Rate Voltage(V) | 160V | 160V | 320V |
| Rate Current(A) | 8A | 8A | 8A |

2. wire range: 0.2~1.5mm²

NOTES2:


- 1.Housing: PA66 (UL94V-0)
- 2.Cover: PA66 (UL94V-0)
- 3.Clamp: Copper alloy (Ni Plated)
- 4.Cage: Brass (Ni Plated)
- 5.Screw1: Steel (M2,Zn Plated)
- 6.Screw1: Steel (M2.5,Zn Plated)

NOTES3:

- 1.Pitch: 3.81mm Poles: 02-24P
- 2.Stripping length: 6-7mm
- 3.Operating temperature: -40°C~+105°C
- 4.RoHS Compliance

How to order

MX15EDGKAM - 3.81 - XXP - XXXX - XX - X - X

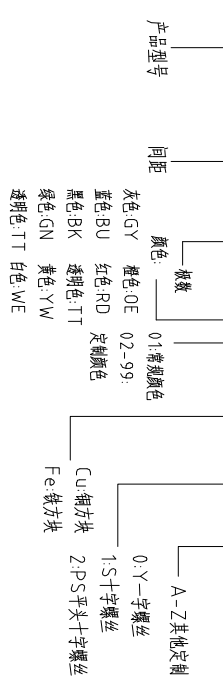

| Pitch Range In mm | Nominal Dimension In mm | Range | Symbol | | | | | |
|-------------------|-------------------------|------------|------------|-------------|-------------|--------|-------|-----|
| Over 6 TO | Over 10 TO | Over 30 TO | Over 60 TO | Over 100 TO | Over 150 TO | 0.1/10 | | |
| ±0.15 | ±0.20 | ±0.30 | ±0.30 | ±0.50 | ±0.70 | ±1.00 | ±1.30 | ±2° |

| ITEM | NAME OF PART | NO. OF PART | Q'TY | MATERIAL | NOTE |
|------|--------------|-------------|-------|---------------------|------|
| DWG | CHK | DATE | SCALE | SHEET/OF | 1/1 |
| APP | DATE | SCALE | NAME | MX15EDGKAM-3.81-XXP | |

CXI MAIXU ELECTRONICS CO., LTD.
 慈溪市迈旭电子有限公司
 DWGNO.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pluggable Terminal Blocks](#) category:

Click to view products by [MAX](#) manufacturer:

Other Similar products are found below :

[57.510.0053](#) [721-104/026-047](#) [721-204/026-045](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [860505](#) [860516](#) [860810](#) [GBPACX-12](#)
[93.731.4953.0](#) [PVP03-3,50](#) [PVS02-5,00](#) [1-1986160-3](#) [1377680000](#) [1531000000](#) [1546228-5](#) [ELFP03110](#) [ELFP10210](#) [ELFT07250](#)
[ELVD12100](#) [ELVF09400](#) [ELXH071G0E](#) [1725220000](#) [1760336](#) [1855000000](#) [19346](#) [1946309](#) [1973592](#) [19892](#) [25.320.4053.1](#) [25.320.4553.9](#)
[25.320.4753.1](#) [25.320.5453.1](#) [25.340.0353.1](#) [25.340.1053.1](#) [25.345.3553.0M001](#) [25.640.3553.1](#) [SH02-5,08](#) [SH06-3,81](#) [SH08-5,08](#) [SH08-](#)
[5,08-K](#) [SH12-5,08](#) [SHS04-5,00](#) [30.303](#) [30.305](#) [30.306](#) [PHP09-5,08](#) [25.193.0453.0](#) [25.320.4653.1](#) [25.332.2453.1](#)