

注：本板为禁止传输、复制、编辑文件，以及用其内容进行交流

REV	ECN NO.	CONTENT	CHK	DATE
-----	---------	---------	-----	------

NOTES:

- UL Standard
 1.Rating voltage/current: 300V/8A
 2.withstanding voltage: AC2000V/1min
 3.Torque value: M2.0, 1.77Lbin
 4.Wire range: 28~16AWG
- IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	250V
Rate Current(A)	7A	7A	7A

2. Torque value: M2, 0.2Nm
 3. wire range: 0.5~1.5mm²
- NOTES2:

- 1.Housing: PA66 (UL94V-0)
 2.Cover: PA66 (UL94V-0)
 3.Cage: Brass (Ni Plated)
 4.Clamp: Copper alloy (Ni Plated)
 5.Screw 1: Steel (M2.0,Zn Plated)
 6.Screw 2: Steel (M2.5,Zn Plated)




NOTES3:

- 1.Pitch: 3.81mm Poles: 02-24P
 2.Stripping length: 6-7mm
 3.Operating temperature: -40℃~+105℃
 4.RoHS Compliance

How to order
 MX15EDGKM - 381 - XXP - XXXX - XX - X - X

产品型号 间距 颜色: 极数
 灰色:GY 蓝色:BU 黑色:BK 绿色:GN 透明色:TW
 褐色:OE 红色:RD 透明色:T 黄色:YW 白色:WE

01:常规颜色
 02-99:定制颜色
 A-Z其他定制
 0-Y一字螺丝
 1:S十字螺丝
 2:PS平头十字螺丝
 Cu:铜方块 Fe:铁方块

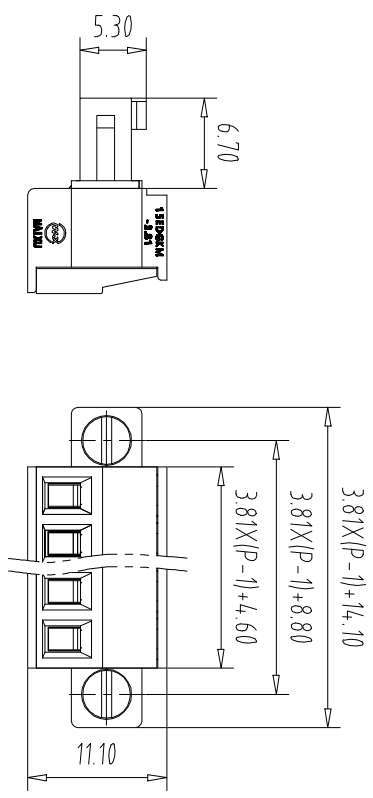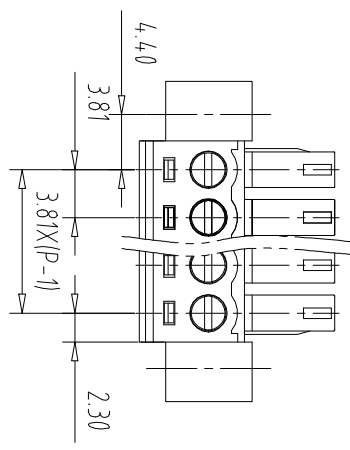

Pitch Range In mm

Over	Nominal Dimension	Range
6	In mm	-
10		0.1/10
15		0.1/10
20		0.1/10
25		0.1/10
30		0.1/10
35		0.1/10
40		0.1/10
45		0.1/10
50		0.1/10
55		0.1/10
60		0.1/10
65		0.1/10
70		0.1/10
75		0.1/10
80		0.1/10
85		0.1/10
90		0.1/10
95		0.1/10
100		0.1/10
105		0.1/10
110		0.1/10
115		0.1/10
120		0.1/10
125		0.1/10
130		0.1/10
135		0.1/10
140		0.1/10
145		0.1/10
150		0.1/10

Pitch Range In mm

Over	Nominal Dimension	Range
±0.15	±0.20	±0.30
±0.30	±0.30	±0.50
±0.50	±0.70	±1.00
±1.00	±1.00	±1.30
±1.30	±1.30	±2°

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	APP	DATE	SCALE	NAME
CKK	DATE	DATE	22.09.14	MM	MX15EDGKM-3.81-XXP
DATE	DATE	DATE		A4	

CI XI MAIXU ELECTRONICS CO.,LTD
 慈溪市迈旭电子有限公司
 DWGNO.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pluggable Terminal Blocks](#) category:

Click to view products by [MAX](#) manufacturer:

Other Similar products are found below :

[57.510.0053](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [860505](#) [860516](#) [860810](#) [GBPACX-12](#) [93.731.4953.0](#) [PV05-5,08-K](#) [PVP03-3,50](#)
[PVS02-5,00](#) [1-1986160-3](#) [1377680000](#) [1531000000](#) [1546228-5](#) [ELFP03110](#) [ELFP10210](#) [ELFT07250](#) [ELVD12100](#) [ELVF09400](#)
[ELVP03100](#) [ELXH071G0E](#) [1700410](#) [1746952](#) [1760336](#) [1800272](#) [1809474](#) [1855000000](#) [19346](#) [1946309](#) [1950227](#) [1973592](#) [19892](#)
[25.320.4053.1](#) [25.320.4553.9](#) [25.320.4753.1](#) [25.320.5453.1](#) [25.340.0353.1](#) [25.340.1053.1](#) [25.345.3553.0M001](#) [25.640.3553.1](#) [SH02-5,08](#)
[SH06-3,81](#) [SH08-5,08](#) [SH08-5,08-K](#) [SH12-5,08](#) [SHS04-5,00](#) [30.303](#) [30.305](#) [30.306](#)