
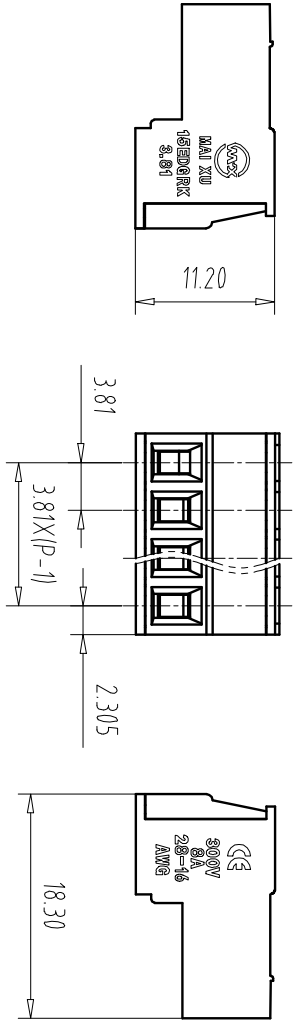


注: 本板为禁止传输、复制、编辑文档, 以及利用其内容建设交流




- NOTES1:
- UL Standard
 - 1.Rating voltage/current: 300V/8A
 - 2.withstanding voltage: AC1600V/1Min
 - 3.Torque value: M2.0, 1.77Lbin
 - 4.Wire range: 28~16AWG
- IEC Standard
- | | | |
|--------------------------|-------|-------|
| 1. Pollution Degree | 2 | 2 |
| Overvoltage Category | III | II |
| Rate Impulse Voltage(KV) | 2.5KV | 2.5KV |
| Rate Voltage(V) | 160V | 320V |
| Rate Current(A) | 7A | 7A |

- NOTES2:
1. Torque value: M2, 0.2Nm
 2. Torque value: M2, 0.2Nm
 3. wire range: 15mm²

- NOTES3:
- 1.Housing: PA66 (UL94V-0)
 - 2.Cover: PA66 (UL94V-0)
 - 3.Cage: Brass (Ni Plated)
 - 4.Conductor: Copper alloy (Sn Plated)
 - 5.Screw: Steel (M2.0,Zn Plated)

- NOTES3:
- 1.Pitch: 3.81mm Poles: 02-24P
 - 2.Stripping length: 7-8mm
 - 3.Operating temperature: -40℃~+105℃
 - 4.RoHS Compliance

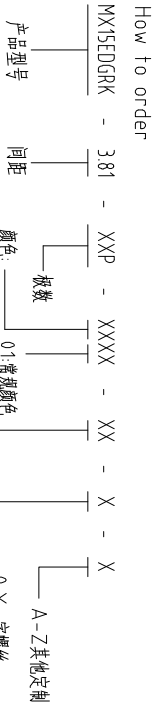

Pitch	Range	In	Nominal Dimension	Range		
mm					—	□
Over	6	Over	10	Over	30	Over
TO	10	TO	24	TO	60	TO
6	10	TO	30	TO	100	TO
		TO	60	TO	150	TO
			100	TO	150	
			150	TO	150	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00
					±1.30	±1.30
						±2°

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	UNITS	MM	SHEET/OF
APP	DATE	SCALE	1:1	A4	1/1
CXI MAIXU ELECTRONICS CO.,LTD 慈溪市迈旭电子有限公司					
MX15EDGRK-3.81-XXP					
DWGNO.					

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pluggable Terminal Blocks](#) category:

Click to view products by [MAX](#) manufacturer:

Other Similar products are found below :

[57.510.0053](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [860505](#) [860516](#) [860810](#) [GBPACX-12](#) [93.731.4953.0](#) [PV05-5,08-K](#) [PVP03-3,50](#)
[PVS02-5,00](#) [1-1986160-3](#) [1377680000](#) [1531000000](#) [1546228-5](#) [ELFP03110](#) [ELFP10210](#) [ELFT07250](#) [ELVD12100](#) [ELVF09400](#)
[ELVP03100](#) [ELXH071G0E](#) [1700410](#) [1746952](#) [1760336](#) [1800272](#) [1809474](#) [1855000000](#) [19346](#) [1946309](#) [1950227](#) [1973592](#) [19892](#)
[25.320.4053.1](#) [25.320.4553.9](#) [25.320.4753.1](#) [25.320.5453.1](#) [25.340.0353.1](#) [25.340.1053.1](#) [25.345.3553.0M001](#) [25.640.3553.1](#) [SH02-5,08](#)
[SH06-3,81](#) [SH08-5,08](#) [SH08-5,08-K](#) [SH12-5,08](#) [SHS04-5,00](#) [30.303](#) [30.305](#) [30.306](#)