
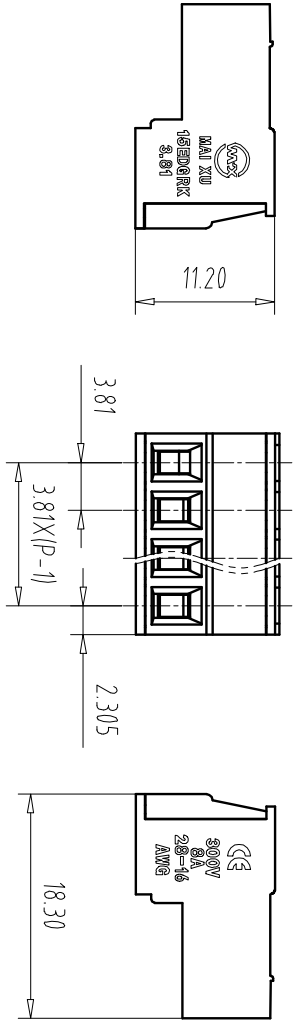


注：本板为禁止运输、复制、翻印文件，以及用其内容进行交流



| Pitch | Range | In | Nominal Dimension | Range |
|-------|-----------------|------------------|---|--------------------|
| mm | Over 6 TO 10 | Over 10 TO 24 | Over 30 TO 60 Over 60 TO 100 Over 100 TO 150 | Over 150 TO 150 |
| | ±0.15 | ±0.20 | ±0.30 | ±0.50 |
| | | | ±0.70 | ±1.00 |
| | | | | ±1.30 |
| | | | | ±2° |

| REV | ECN NO. | CONTENT | CHK | DATE |
|-----|---------|---------|-----|------|
| | | | | |

NOTES:

- UL Standard
- 1.Rating voltage/current: 300V/8A
- 2.withstanding voltage: AC1600V/1Min
- 3.Torque value: M2.0, 1.77Lbin
- 4.Wire range: 28~16AWG

IEC Standard

| Pollution Degree | 2 | 2 |
|--------------------------|-------|-------|
| Overvoltage Category | III | II |
| Rate Impulse Voltage(KV) | 2.5KV | 2.5KV |
| Rate Voltage(V) | 160V | 320V |
| Rate Current(A) | 7A | 7A |

- 1. Torque value: M2, 0.2Nm
- 2. Torque value: M2, 0.2Nm
- 3. wire range: 15mm²

NOTES2:

- 1.Housing: PA66 (UL94V-0)
- 2.Cover: PA66 (UL94V-0)
- 3.Cage: Brass (Ni Plated)
- 4.Conductor: Copper alloy (Sn Plated)
- 5.Screw: Steel (M2.0,Zn Plated)

NOTES3:

- 1.Pitch: 3.81mm Poles: 02-24P
- 2.Stripping length: 7-8mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

MX15EDGRK - 381 - XXP - XXXX - XX - X - X

产品型号

间距

极数

颜色: 01:常规颜色

灰色:GY 橙色:OE 02-99:
蓝色:BU 红色:RD 定制颜色
黑色:BK 透明色:TT
绿色:GN 黄色:YW
透明色:TT 白色:WE

A-Z其他定制
0:Y一字螺丝
1:S十字螺丝
2:P十字螺丝
Cu:铜方块
Fe:铁方块

| ITEM | NAME OF PART | NO. OF PART | Q'TY | MATERIAL | NOTE |
|--------------------------------|--------------|-------------|--------------------|----------|------|
| DWG | CHK | DATE | SCALE | SHEET/OF | 1/1 |
| APP | DATE | | 1:1 | A4 | |
| CIXI MAIXU ELECTRONICS CO.,LTD | | | MX15EDGRK-3.81-XXP | | |
| 慈溪市迈旭电子有限公司 | | | DWGNO. | | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pluggable Terminal Blocks](#) category:

Click to view products by [MAX](#) manufacturer:

Other Similar products are found below :

[57.510.0053](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [860505](#) [860516](#) [860810](#) [GBPACX-12](#) [93.731.4953.0](#) [PV05-5,08-K](#) [PVP03-3,50](#)
[PVS02-5,00](#) [1-1986160-3](#) [1377680000](#) [1531000000](#) [1546228-5](#) [ELFP03110](#) [ELFP10210](#) [ELFT07250](#) [ELVD12100](#) [ELVF09400](#)
[ELVP03100](#) [ELXH071G0E](#) [1700410](#) [1746952](#) [1760336](#) [1800272](#) [1809474](#) [1855000000](#) [19346](#) [1946309](#) [1950227](#) [1973592](#) [19892](#)
[25.320.4053.1](#) [25.320.4553.9](#) [25.320.4753.1](#) [25.320.5453.1](#) [25.340.0353.1](#) [25.340.1053.1](#) [25.345.3553.0M001](#) [25.640.3553.1](#) [SH02-5,08](#)
[SH06-3,81](#) [SH08-5,08](#) [SH08-5,08-K](#) [SH12-5,08](#) [SHS04-5,00](#) [30.303](#) [30.305](#) [30.306](#)