

注：本板为禁止传输、复制、编辑、修改、以及用其内容进行交流

| REV | ECN NO. | CONTENT | CHK | DATE |
|-----|---------|---------|-----|------|
|-----|---------|---------|-----|------|

NOTES1:  
UL Standard

|               |      |   |      |
|---------------|------|---|------|
| 1. Use group  | B    | C | D    |
| Rated Current | 15A  | - | 10A  |
| Rated Voltage | 300V | - | 300V |

3. Torque value: M2.5, 3.54Lb/in  
4. Wire range: 28~12AWG

IEC Standard

|                          |     |       |    |
|--------------------------|-----|-------|----|
| 1. Pollution Degree      | 3   | 2     | 2  |
| Overvoltage Category     | III | III   | II |
| Rate Impulse Voltage(KV) | /   | 4.0KV | /  |
| Rate Voltage(V)          | /   | 320V  | /  |
| Rate Current(A)          | /   | 12A   | /  |

2. Torque value: M2.5, 0.4Nm  
3. wire range: 1.0~2.5mm<sup>2</sup>

NOTES2:






- 1.Housing: PA66 (UL94V-0)
- 2.Cover: PA66 (UL94V-0)
- 3.Cage: Brass (Ni Plated)
- 4.Clamp: Copper alloy (Ni Plated)
- 5.Screw: Steel (M2.5,Zn Plated)

NOTES3:

- 1.Pitch: 5.08mm Poles: 02-24P
- 2.Stripping length: 7-8mm
- 3.Operating temperature: -40°C~+105°C
- 4.RoHS Compliance

How to order

MXZEDGKA - 508 - XXP - XXXX - XX - X - X

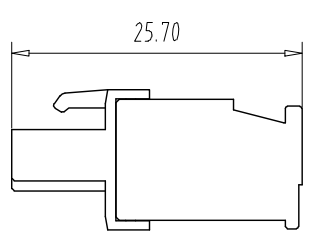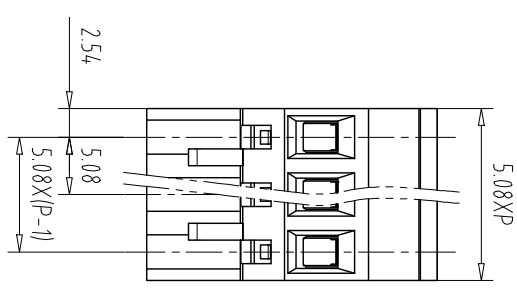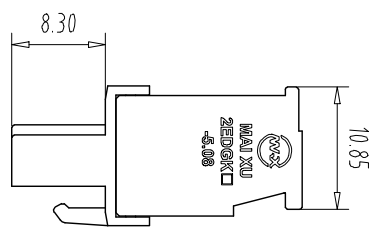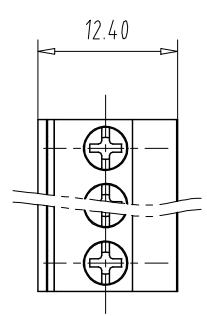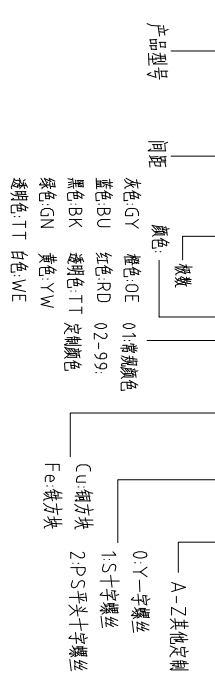

| Pitch | Range | In    | Nominal Dimension | Range |
|-------|-------|-------|-------------------|-------|
| mm    |       | In mm |                   |       |

|        |         |         |         |         |          |          |          |
|--------|---------|---------|---------|---------|----------|----------|----------|
| Over 6 | Over 10 | Over 24 | Over 30 | Over 60 | Over 100 | Over 100 | Over 150 |
| TO 6   | TO 10   | TO 24   | TO 30   | TO 60   | TO 100   | TO 150   |          |
| ±0.15  | ±0.20   | ±0.30   | ±0.30   | ±0.50   | ±0.70    | ±1.00    | ±1.30    |
|        |         |         |         |         |          |          | ±2°      |

| ITEM                           | NAME OF PART | NO. OF PART | Q'TY              | MATERIAL | NOTE |
|--------------------------------|--------------|-------------|-------------------|----------|------|
| DWG                            | CHK          | DATE        | SCALE             | SHEET/OF | 1/1  |
| APP                            | DATE         |             | 1:1               | A4       |      |
| CIXI MAIXU ELECTRONICS CO.,LTD |              |             | MXZEDGKA-5.08-XXP |          |      |
| 慈溪市迈旭电子有限公司                    |              |             | DWGNO.            |          |      |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pluggable Terminal Blocks](#) category:*

*Click to view products by [MAX](#) manufacturer:*

Other Similar products are found below :

[57.510.0053](#) [721-104/026-047](#) [721-204/026-045](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [860505](#) [860516](#) [860810](#) [GBPACX-12](#)  
[93.731.4953.0](#) [PVP03-3,50](#) [PVS02-5,00](#) [1-1986160-3](#) [1377680000](#) [1531000000](#) [1546228-5](#) [ELFP03110](#) [ELFP10210](#) [ELFT07250](#)  
[ELVD12100](#) [ELVF09400](#) [ELXH071G0E](#) [1725220000](#) [1760336](#) [1855000000](#) [19346](#) [1946309](#) [1973592](#) [19892](#) [25.320.4053.1](#) [25.320.4553.9](#)  
[25.320.4753.1](#) [25.320.5453.1](#) [25.340.0353.1](#) [25.340.1053.1](#) [25.345.3553.0M001](#) [25.640.3553.1](#) [SH02-5,08](#) [SH06-3,81](#) [SH08-5,08](#) [SH08-](#)  
[5,08-K](#) [SH12-5,08](#) [SHS04-5,00](#) [30.303](#) [30.305](#) [30.306](#) [PHP09-5,08](#) [25.193.0453.0](#) [25.320.4653.1](#) [25.332.2453.1](#)