
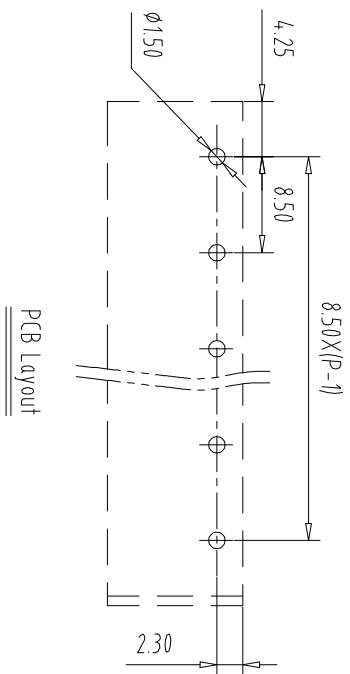
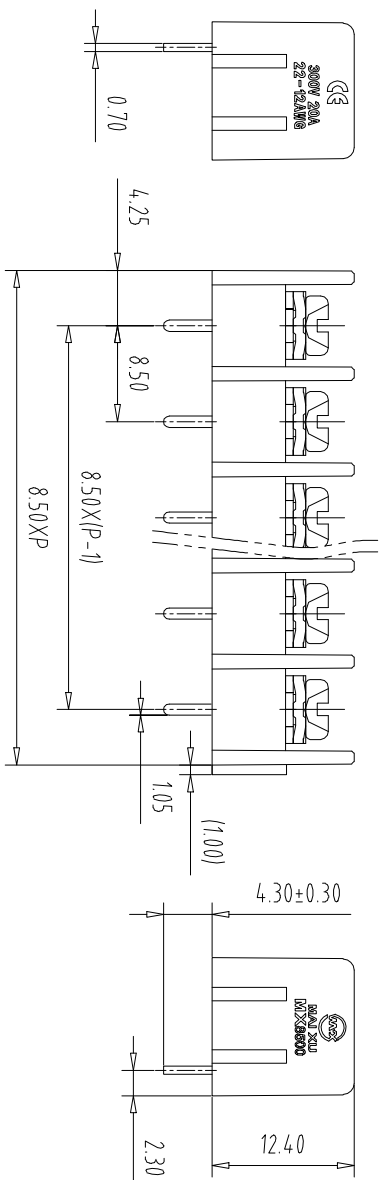


注：本板为禁止传输、复制、编辑文件，以及利用其内容建设数据库

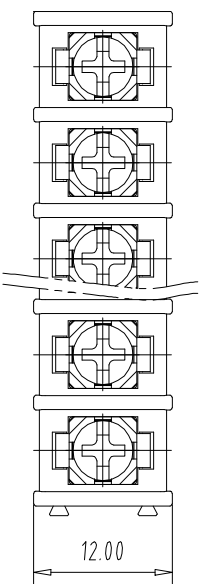

PCB Layout

REV	ECN NO.	CONTENT	CHK	DATE

NOTES1:

- UL Standard
- 1.Rating voltage/current: 300V/20A
- 2.withstanding voltage: AC2500V//1Min
- 3.Torque value: M3, 4.43Lb.in
- 4.Wire range: 22~12AWG

IEC Standard

- 1.Rating voltage/current: 450V/17.5A
- 2.Torque value: M3, 0.5Nm
- 3.wire range: 2.5mm²


NOTES2:

- 1.Housing: PA66(UL94V-0)
- 2.Screw: Steel(M3, Ni Plated)
- 3.Solder Pin: Copper alloy(Sn Plated)

NOTES3:

- 1.Pitch: 8.50mm Poles: 02-24P
- 2.Operating temperature: -40~+105℃
- 3.RoHS Compliance

How to order

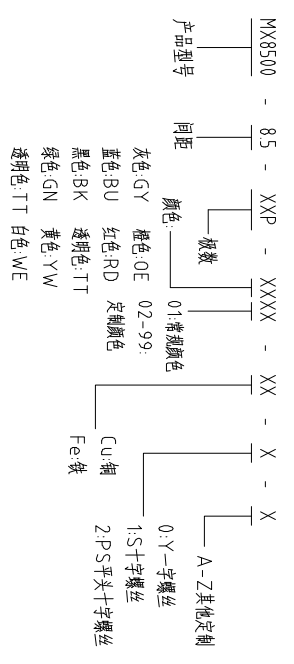

Pitch Range	In mm	Nominal Dimension	Range		
Over 6	Over 10	Over 30	Over 60	Over 100	Over 150
TO 6	TO 10	TO 24	TO 30	TO 60	TO 100
±0.15	±0.20	±0.30	±0.30	±0.50	±1.00
					±1.30
					±2°

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	UNITS	MM	1/1
APP	DATE	SCALE	SCALE	A4	1/1
			NAME		
			MX8500-8.5-XXP		
			DWGNO.		

MAXXU 慈溪市迈旭电子有限公司



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Barrier Terminal Blocks](#) category:

Click to view products by [MAX](#) manufacturer:

Other Similar products are found below :

[CR151D20104](#) [670A-RZ-15-KT20](#) [6C1N03](#) [6PCR-02](#) [6PCR-02-008](#) [6PCR-05-008](#) [6PCR-08-008](#) [6PCR-09-008](#) [6PCR-13-006](#) [6PCR-15-006](#) [6PCV-06-008](#) [6PCV-06-716](#) [6PCV-09-001](#) [6PCV-15-008](#) [6PCV-17-1206](#) [6PCV-20-323](#) [6STR-06-006](#) [6STR-08-006](#) [6STR-12-008](#) [6STR-13-006](#) [6STR-14-008](#) [6STR-16-008](#) [6STR-17-008](#) [6STR-21-008](#) [6STR-25-008](#) [6STR-27-008](#) [6STV-03-008](#) [6STV-09-006](#) [6STV-10-006](#) [6WWV-11-008](#) [6WWV-12-008](#) [6WWV-16-008](#) [71502-50](#) [71507-47-50](#) [72504-C-50](#) [72506-C](#) [72507-C-50](#) [72508-56](#) [73203](#) [75505-C-50](#) [812-GP-3/4ST-09](#) [8-1437402-5](#) [8-1437402-7](#) [8PCR-06-006](#) [8PCR-11-006](#) [8PCV-02-008](#) [8PCV-04-001](#) [8PCV-05-008](#) [8PCV-09-006](#) [8PCV-15-006](#)