

1、订货代码 HOW TO ORDER

举例 For example

| | | | | | | | |
|----|------|---|-----|---|---|----|---|
| XR | 0307 | — | 220 | K | P | 52 | E |
| ↓ | ↓ | | ↓ | ↓ | ↓ | ↓ | ↓ |
| A | B | | C | D | E | F | G |

A:

| | |
|----------------------|--------------------------------------|
| 产品类别 Product type | |
| XR | 轴向色码电感器 Axial color code inductor |

C:

| | |
|---|--|
| 标称电感量 Nominal inductance (μH) | |
| 前两位数字为有效数字，后一位数字表示零的个数。 The first two digits are significant, and the third digit is number of zero. | |
| * 例如 For example : 101=100μH ; 5R6=5.6μH R22=0.22μ H | |

E:

| | | |
|-------------------------|----|------------------------------|
| 包装方式 Packaging style | | |
| 编带 Tape & reel | P | 盒带包装 Ammo |
| | T | 卷带包装 Reel |
| 散包装 Bulk | F | 直脚轴向 Axial |
| | L | 直脚成型 Straight lead formed |
| | V | 弯脚成型 Bent lead formed |
| | VK | 弯脚 K 型 Bent lead K formed |

G:

| | |
|--------------|----------------------|
| 备注 Remark | |
| E | 无铅 Lead Free |
| 空格 Blank | 含铅 Lead Contained |



B:

| | | |
|-------------------------|------------------------|------------------------|
| 尺寸 Dimensions (mm) | | |
| 类型 Type | 外径 D _{max} | 体长 L _{max} |
| 0204 | 2.3 | 4.2 |
| 0307 | 2.8 | 7.0 |
| 0410 | 4.0 | 10.5 |
| 0510 | 5.0 | 10.5 |

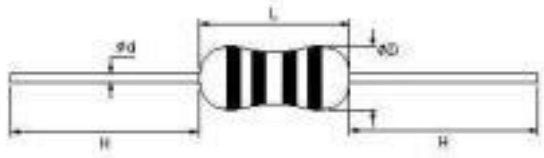
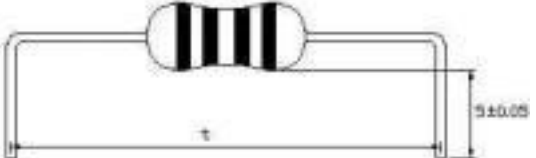
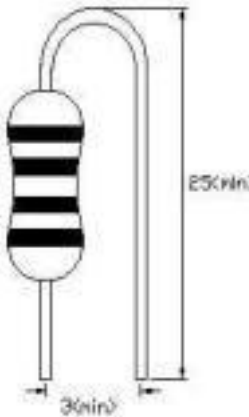
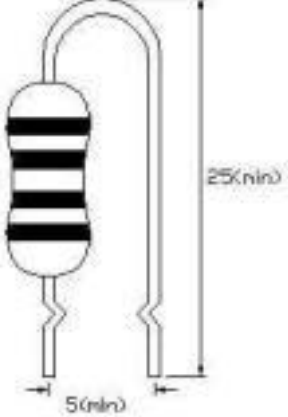
D:

| | |
|-------------------|-------|
| 感量偏差 Tolerance | |
| J | ±5.0% |
| K | ±10% |
| M | ±20% |

F:

| | | |
|----------------------------|----|-------------------------------------|
| 引脚形式 Lead configuration | | |
| 编带 Tape & reel | 26 | 编带内距 : 26mm Tape width: |
| | 52 | 编带内距 : 52mm Tape width: |
| 引脚成型 Formed lead | 05 | 引脚脚距 : 5.08mm Formed lead pitch: |
| | 07 | 引脚脚距 : 7.5mm Formed lead pitch: |
| | 10 | 引脚脚距 : 10.0mm Formed lead pitch: |
| | 12 | 引脚脚距 : 12.5mm Formed lead pitch: |
| | 15 | 引脚脚距 : 15.0mm Formed lead pitch: |
| | 17 | 引脚脚距 : 17.5mm Formed lead pitch: |
| | 20 | 引脚脚距 : 20.0mm Formed lead pitch: |

2、外形尺寸 EXTERNAL DIMENSIONS

| 类型 Type | 尺寸 Body size (mm) | | | | |  轴向 (Axial) |
|------------|------------------------|----------|--|---------------|----------|--|
| | $\phi D \leq$ | $L \leq$ | t | ϕd | $H \geq$ | |
| XR0204 | 2.3 | 4.2 | t = 5.08±0.6 t = 7.50±0.6 | 0.50 ±0.05 | 20 |  直脚成型 (L type) |
| XR0307 | 2.8 | 7.0 | t = 10.0±0.6 t = 12.5±0.6 | 0.50 ±0.05 | |  弯脚成型 (V type) |
| XR0410 | 4.0 | 10.5 | t = 12.5±0.6 t = 15.0±0.6 t = 17.5±0.6 t = 20.0±0.6 | 0.60 ±0.05 | |  弯脚 K 型 (VK type) |
| XR0510 | 5.0 | 10.5 | t = 15.0±0.6 t = 17.5±0.6 t = 20.0±0.6 | 0.65 ±0.05 | | |

3、产品结构 STRUCTURE



| 序号 NO. | ① 磁芯 Core | ② 漆包线 Wire | ③ 引脚 Lead | ④ 涂覆层 Coating | ⑤ 色码 Color code |
|-----------------------|----------------|------------------------|----------------------------|---------------------|---|
| 材料名称 Material name | 铁氧体 Ferrite | 漆包铜线 Enamelled wire | 镀锡铜线 Tinned copper wire | 环氧树脂 Epoxy resin | 环氧色漆 Epoxy paint for Color coding |

4、色码标记代号 MARKING



| | 标称电感量 Nominal inductance (μH) | | | 感量偏差 Tolerance |
|-------------|---|------------------------------------|------------------------------------|------------------------------------|
| | 第一色环 1 st color zone | 第二色环 2 nd color zone | 第三色环 3 rd color zone | 第四色环 4 th color zone |
| | 第一数字 1 st digit | 第二数字 2 nd digit | 第三数字 3 rd digit | |
| 黑 Black | 0 | 0 | $\times 10^0 (1)$ | M : $\pm 20\%$ |
| 棕 Brown | 1 | 1 | $\times 10^1 (10)$ | |
| 红 Red | 2 | 2 | $\times 10^2 (100)$ | |
| 橙 Orange | 3 | 3 | $\times 10^3 (1000)$ | |
| 黄 Yellow | 4 | 4 | $\times 10^4 (10000)$ | |
| 绿 Green | 5 | 5 | $\times 10^5 (100000)$ | |
| 蓝 Blue | 6 | 6 | | |
| 紫 Purple | 7 | 7 | | |
| 灰 Gray | 8 | 8 | | |
| 白 White | 9 | 9 | | |
| 金 Gold | / | / | $\times 10^{-1} (0.1)$ | J : $\pm 5\%$ |
| 银 Silver | / | / | $\times 10^{-2} (0.01)$ | K : $\pm 10\%$ |

*例如 e.g. :

标称电感量及偏差为 22 μH , $\pm 5\%$ 的电感器其色码为：红+红+黑+金；

If nominal inductance & tolerance is 22 μH , $\pm 5\%$, respectively red+red+black+gold should be marked;

标称电感量及偏差为 1.0 μH , $\pm 10\%$ 的电感器其色码为：棕+黑+金+银；

If nominal inductance & tolerance is 1.0 μH , $\pm 10\%$, respectively brown+black+gold+silver should be marked;

标称电感量及偏差为 0.22 μH , $\pm 20\%$ 的电感器其色码为：红+红+银+黑。

If nominal inductance & tolerance is 0.22 μH , $\pm 20\%$, respectively red+red+silver+black should be marked.

备注：XR0204 由于体长较小，只标注前三条代表标称电感量的色码。

NOTE: Only the first three color zones are marked on the body of XR0204, due to the small body size.

5、电性能参数及测试条件

ELECTRICAL CHARACTERISTICS & TEST CONDITIONS

XR0204 型电感器电性能参数及测试条件

XR0204 TYPE INDUCTORS ELECTRICAL CHARACTERISTICS & TEST CONDITIONS

| XR0204 类型 Type | 电感量 Inductance (μH) | 误差 Tolerance | Q (min) | 直流电阻 RDC (Ω) max | 测试频率 Test frequency (MHz) | 自谐频率 SRF (MHz) min | 额定电流 Rated current I _{dc} (mA) max |
|-----------------------------|--|-------------------|--------------|---------------------------------|-----------------------------------|----------------------------|---|
| XR0204-R22 | 0.22 | M : $\pm 20\%$ | 35 | 0.40 | 25.2 | 150 | 400 |
| XR0204-R27 | 0.27 | | | 380 | | | |
| XR0204-R33 | 0.33 | | | 370 | | | |
| XR0204-R39 | 0.39 | | | 350 | | | |
| XR0204-R47 | 0.47 | | | 330 | | | |
| XR0204-R56 | 0.56 | | | 320 | | | |
| XR0204-R68 | 0.68 | | | 310 | | | |
| XR0204-R82 | 0.82 | | | 290 | | | |
| XR0204-1R0 | 1.0 | | | 270 | | | |
| XR0204-1R2 | 1.2 | | | K : $\pm 10\%$ | | | 40 |
| XR0204-1R5 | 1.5 | 80 | 250 | | | | |
| XR0204-1R8 | 1.8 | 60 | 240 | | | | |
| XR0204-2R2 | 2.2 | 45 | 230 | | | | |
| XR0204-2R7 | 2.7 | 40 | 220 | | | | |
| XR0204-3R3 | 3.3 | 38 | 210 | | | | |
| XR0204-3R9 | 3.9 | 35 | 200 | | | | |
| XR0204-4R7 | 4.7 | 32 | 190 | | | | |
| XR0204-5R6 | 5.6 | 30 | 180 | | | | |
| XR0204-6R8 | 6.8 | 28 | 175 | | | | |
| XR0204-8R2 | 8.2 | 26 | 165 | | | | |
| XR0204-100 | 10 | 24 | 160 | | | | |
| XR0204-120 | 12 | 22 | 150 | | | | |
| XR0204-150 | 15 | 20 | 145 | | | | |
| XR0204-180 | 18 | 18 | 140 | | | | |
| XR0204-220 | 22 | 17 | 130 | | | | |
| XR0204-270 | 27 | 16 | 80 | | | | |
| XR0204-330 | 33 | 14 | 76 | | | | |
| XR0204-390 | 39 | 13 | 73 | | | | |
| XR0204-470 | 47 | 12 | 70 | | | | |
| XR0204-560 | 56 | 11 | 68 | | | | |
| XR0204-680 | 68 | 10 | 64 | | | | |
| XR0204-820 | 82 | 9.5 | 46 | | | | |
| XR0204-101 | 100 | 9.0 | 44 | | | | |
| XR0204-121 | 120 | 8.0 | 42 | | | | |
| XR0204-151 | 150 | 6.0 | 39 | | | | |
| XR0204-181 | 180 | 5.5 | 37 | | | | |
| XR0204-221 | 220 | 5.0 | 35 | | | | |
| 测试仪器 Test equipment | HP4285A (HP4286A , HP4287A) | | | HP4338B | | HM9461 | HP42841A |
| 环境温度 Ambient temperature | 18 ~ 25°C | | | | | | |
| 环境湿度 Ambient humidity | 45%~75% | | | | | | |

特殊要求的产品可以根据客户要求生产

The products can be customized according to customer requirement.

XR0307 型电感器电性能参数及测试条件
 XR0307 TYPE INDUCTORS ELECTRICAL CHARACTERISTICS & TEST CONDITIONS

| XR0307 类型 Type | 电感量 Inductance (μH) | 误差 Tolerance | Q (min) | 直流电阻 RDC (Ω) max | 测试频率 Test frequency (MHz) | 自谐频率 SRF (MHz) min | 额定电流 Rated current I_{DC} (mA) max | | | |
|-----------------------------|--|-------------------|-------------------|---------------------------------|-----------------------------------|----------------------------|--|------|-----|-----|
| XR0307-R22 | 0.22 | M : $\pm 20\%$ | 35 | 0.40 | 25.2 | 150 | 400 | | | |
| XR0307-R27 | 0.27 | | | 380 | | | | | | |
| XR0307-R33 | 0.33 | | | 370 | | | | | | |
| XR0307-R39 | 0.39 | | | 350 | | | | | | |
| XR0307-R47 | 0.47 | | | 330 | | | | | | |
| XR0307-R56 | 0.56 | | | 320 | | | | | | |
| XR0307-R68 | 0.68 | | 310 | | | | | | | |
| XR0307-R82 | 0.82 | | 290 | | | | | | | |
| XR0307-1R0 | 1.0 | | 270 | | | | | | | |
| XR0307-1R2 | 1.2 | | K : $\pm 10\%$ | 40 | | | 0.90 | 7.96 | 144 | 260 |
| XR0307-1R5 | 1.5 | | | | | | 131 | | 250 | |
| XR0307-1R8 | 1.8 | | | | | | 121 | | 240 | |
| XR0307-2R2 | 2.2 | | | | | | 110 | | 230 | |
| XR0307-2R7 | 2.7 | | | | | | 100 | | 220 | |
| XR0307-3R3 | 3.3 | | | | | | 94 | | 210 | |
| XR0307-3R9 | 3.9 | | | 65 | | | 200 | | | |
| XR0307-4R7 | 4.7 | | | 56 | | | 190 | | | |
| XR0307-5R6 | 5.6 | | | 48 | | | 180 | | | |
| XR0307-6R8 | 6.8 | 37 | | 175 | | | | | | |
| XR0307-8R2 | 8.2 | 25 | | 165 | | | | | | |
| XR0307-100 | 10 | 21 | | 160 | | | | | | |
| XR0307-120 | 12 | 19 | | 150 | | | | | | |
| XR0307-150 | 15 | 17 | | 145 | | | | | | |
| XR0307-180 | 18 | 13 | | 140 | | | | | | |
| XR0307-220 | 22 | 9.6 | | 130 | | | | | | |
| XR0307-270 | 27 | 7.2 | | 125 | | | | | | |
| XR0307-330 | 33 | J : $\pm 5\%$ | | 50 | 4.1 | 2.52 | 6.3 | | 120 | |
| XR0307-390 | 39 | | 4.5 | | 6.3 | | 115 | | | |
| XR0307-470 | 47 | | 4.9 | | 6.3 | | 110 | | | |
| XR0307-560 | 56 | | 5.3 | | 6.2 | | 105 | | | |
| XR0307-680 | 68 | | 5.8 | | 5.7 | | 100 | | | |
| XR0307-820 | 82 | | 6.3 | | 5.3 | | 95 | | | |
| XR0307-101 | 100 | | 7.0 | 4.8 | 90 | | | | | |
| XR0307-121 | 120 | | 13.0 | 3.8 | 90 | | | | | |
| XR0307-151 | 150 | | 15.0 | 3.5 | 85 | | | | | |
| XR0307-181 | 180 | | 16.0 | 3.3 | 80 | | | | | |
| XR0307-221 | 220 | | 17.0 | 3.0 | 75 | | | | | |
| XR0307-271 | 270 | | 19.0 | 2.8 | 65 | | | | | |
| XR0307-331 | 330 | | 20.0 | 2.6 | 60 | | | | | |
| XR0307-391 | 390 | | 22.0 | 2.4 | 55 | | | | | |
| XR0307-471 | 470 | | 24.0 | 2.25 | 55 | | | | | |
| XR0307-561 | 560 | | 26.0 | 2.10 | 50 | | | | | |
| XR0307-681 | 680 | | 28.0 | 1.95 | 45 | | | | | |
| XR0307-821 | 820 | | 30.0 | 1.85 | 40 | | | | | |
| XR0307-102 | 1000 | 33.0 | 1.40 | 40 | | | | | | |
| 测试仪器 Test equipment | HP4285A (HP4286A , HP4287A) | | | HP4338B | | HM9461 | HP42841A | | | |
| 环境温度 Ambient temperature | 18 ~ 25°C | | | | | | | | | |
| 环境湿度 Ambient humidity | 45%~75% | | | | | | | | | |

特殊要求的产品可以根据客户要求生产
 The products can be customized according to customer requirement.

XR0410 型电感器电性能参数及测试条件

XR0410 TYPE INDUCTORS ELECTRICAL CHARACTERISTICS & TEST CONDITIONS

| XR0410 类型 Type | 电感量 Inductance (μH) | 误差 Tolerance | Q (min) | 直流电阻 RDC (Ω) max | 测试频率 Test frequency (MHz) | 自谐频率 SRF (MHz) min | 额定电流 Rated current I_{DC} (mA) max |
|-----------------------------|--|-------------------|------------|---------------------------------|---------------------------------|--------------------------|--|
| XR0410-R22 | 0.22 | M : $\pm 20\%$ | 45 | 0.10 | 25.2 | 300 | 1400 |
| XR0410-R27 | 0.27 | | 45 | 0.11 | | 270 | 1320 |
| XR0410-R33 | 0.33 | | 45 | 0.12 | | 250 | 1280 |
| XR0410-R39 | 0.39 | | 45 | 0.13 | | 230 | 1200 |
| XR0410-R47 | 0.47 | | 45 | 0.14 | | 220 | 1150 |
| XR0410-R56 | 0.56 | | 45 | 0.15 | | 200 | 1122 |
| XR0410-R68 | 0.68 | | 45 | 0.16 | | 190 | 1030 |
| XR0410-R82 | 0.82 | | 45 | 0.17 | | 172 | 980 |
| XR0410-1R0 | 1.0 | | 45 | 0.19 | | 157 | 920 |
| XR0410-1R2 | 1.2 | | 50 | 0.21 | | 144 | 880 |
| XR0410-1R5 | 1.5 | | 50 | 0.23 | 131 | 830 | |
| XR0410-1R8 | 1.8 | | 55 | 0.25 | 121 | 790 | |
| XR0410-2R2 | 2.2 | | 55 | 0.28 | 110 | 750 | |
| XR0410-2R7 | 2.7 | | 60 | 0.30 | 100 | 720 | |
| XR0410-3R3 | 3.3 | | 65 | 0.34 | 94 | 670 | |
| XR0410-3R9 | 3.9 | | 65 | 0.37 | 65 | 640 | |
| XR0410-4R7 | 4.7 | | 70 | 0.39 | 56 | 620 | |
| XR0410-5R6 | 5.6 | | 70 | 0.43 | 48 | 590 | |
| XR0410-6R8 | 6.8 | | 75 | 0.48 | 37 | 550 | |
| XR0410-8R2 | 8.2 | | 80 | 0.52 | 25 | 530 | |
| XR0410-100 | 10 | 65 | 0.58 | 21 | 500 | | |
| XR0410-120 | 12 | 50 | 0.63 | 19 | 480 | | |
| XR0410-150 | 15 | 50 | 0.72 | 17 | 460 | | |
| XR0410-180 | 18 | 50 | 0.77 | 13 | 430 | | |
| XR0410-220 | 22 | 50 | 0.84 | 9.6 | 410 | | |
| XR0410-270 | 27 | 55 | 0.94 | 7.2 | 390 | | |
| XR0410-330 | 33 | 55 | 1.03 | 6.3 | 370 | | |
| XR0410-390 | 39 | 50 | 1.12 | 6.3 | 350 | | |
| XR0410-470 | 47 | 45 | 1.22 | 6.3 | 340 | | |
| XR0410-560 | 56 | 40 | 1.34 | 6.2 | 320 | | |
| XR0410-680 | 68 | 40 | 1.47 | 5.7 | 305 | | |
| XR0410-820 | 82 | 35 | 1.62 | 5.3 | 290 | | |
| XR0410-101 | 100 | 30 | 1.80 | 4.8 | 275 | | |
| XR0410-121 | 120 | 55 | 3.70 | 3.8 | 185 | | |
| XR0410-151 | 150 | 45 | 4.20 | 3.5 | 175 | | |
| XR0410-181 | 180 | 50 | 4.60 | 3.3 | 165 | | |
| XR0410-221 | 220 | 55 | 5.10 | 3.0 | 155 | | |
| XR0410-271 | 270 | 65 | 5.80 | 2.8 | 145 | | |
| XR0410-331 | 330 | 65 | 6.40 | 2.6 | 137 | | |
| XR0410-391 | 390 | 65 | 7.00 | 2.4 | 133 | | |
| XR0410-471 | 470 | 60 | 7.70 | 2.25 | 126 | | |
| XR0410-561 | 560 | 60 | 8.50 | 2.10 | 120 | | |
| XR0410-681 | 680 | 55 | 9.40 | 1.95 | 113 | | |
| XR0410-821 | 820 | 55 | 10.50 | 1.85 | 105 | | |
| XR0410-102 | 1000 | 50 | 14.00 | 1.40 | 100 | | |
| XR0410-152 | 1500 | 30 | 25.00 | 0.252 | 1.10 | 85 | |
| XR0410-222 | 2200 | 30 | 35.00 | 0.252 | 0.80 | 75 | |
| 测试仪器 Test equipment | HP4285A (HP4286A ,HP4287A) | | | HP4338B | | HM9461 | HP42841A |
| 环境温度 Ambient temperature | 18 ~ 25°C | | | | | | |
| 环境湿度 Ambient humidity | 45%~75% | | | | | | |

特殊要求的产品可以根据客户要求生产

The products can be customized according to customer requiremen

XR0510 型电感器电性能参数及测试条件
 XR0510 TYPE INDUCTORS ELECTRICAL CHARACTERISTICS & TEST CONDITIONS

| XR0510 类型 Type | 电感量 Inductance (μH) | 误差 Tolerance | Q (min) | 直流电阻 RDC (Ω) max | 测试频率 Test frequency (MHz) | 自谐频率 SRF (MHz) min | 额定电流 Rated current I_{DC} (mA) max | |
|-----------------------------|--|------------------|------------------|---------------------------------|---------------------------------|--------------------------|--|-----|
| XR0510-2R2 | 2.2 | M: $\pm 20\%$ | 10 | 0.26 | 7.96 | 50 | 2100 | |
| XR0510-3R3 | 3.3 | | 10 | 0.3 | | 50 | 1800 | |
| XR0510-3R9 | 3.9 | | 10 | 0.35 | | 50 | 1500 | |
| XR0510-4R7 | 4.7 | | 20 | 0.43 | | 50 | 900 | |
| XR0510-6R8 | 6.8 | | 15 | 0.45 | | 45 | 850 | |
| XR0510-100 | 10 | | 15 | 0.45 | | 30 | 750 | |
| XR0510-120 | 12 | | 30 | 0.6 | | 30 | 700 | |
| XR0510-150 | 15 | | 30 | 0.65 | | 30 | 650 | |
| XR0510-180 | 18 | | 30 | 0.65 | | 30 | 600 | |
| XR0510-220 | 22 | | K: $\pm 10\%$ | 30 | 0.65 | 2.52 | 8 | 550 |
| XR0510-270 | 27 | | | 30 | 0.65 | | 7 | 500 |
| XR0510-330 | 33 | | | 30 | 0.65 | | 6 | 470 |
| XR0510-390 | 39 | | | 30 | 0.65 | | 6 | 460 |
| XR0510-470 | 47 | | | 30 | 0.8 | | 5 | 430 |
| XR0510-560 | 56 | | | 30 | 0.8 | | 5 | 430 |
| XR0510-680 | 68 | | | 30 | 0.8 | | 4.5 | 430 |
| XR0510-820 | 82 | | | 30 | 0.82 | | 3.8 | 430 |
| XR0510-101 | 100 | | | 30 | 0.9 | | 3.5 | 400 |
| XR0510-121 | 120 | 30 | | 0.92 | 3.3 | 390 | | |
| XR0510-151 | 150 | 30 | | 0.92 | 3.2 | 390 | | |
| XR0510-181 | 180 | 30 | | 0.94 | 2.8 | 390 | | |
| XR0510-221 | 220 | 30 | | 0.94 | 2.6 | 380 | | |
| XR0510-271 | 270 | 30 | | 1 | 2.4 | 380 | | |
| XR0510-331 | 330 | 30 | | 1.11 | 2.2 | 380 | | |
| XR0510-391 | 390 | 30 | | 1.12 | 2 | 350 | | |
| XR0510-471 | 470 | J: $\pm 5\%$ | | 45 | 1.22 | 0.796 | 1.9 | 340 |
| XR0510-561 | 560 | | | 40 | 1.34 | | 1.8 | 320 |
| XR0510-681 | 680 | | 40 | 1.47 | 1.5 | | 305 | |
| XR0510-821 | 820 | | 35 | 1.62 | 1.3 | | 290 | |
| XR0510-102 | 1000 | | 45 | 14 | 1 | | 100 | |
| XR0510-122 | 1200 | | 40 | 16.9 | 0.95 | | 95 | |
| XR0510-152 | 1500 | | 40 | 21.6 | 0.9 | | 90 | |
| XR0510-182 | 1800 | | 40 | 24 | 0.85 | | 85 | |
| XR0510-222 | 2200 | | 40 | 34.7 | 0.8 | | 80 | |
| XR0510-272 | 2700 | | 40 | 40 | 0.75 | 75 | | |
| XR0510-332 | 3300 | | 40 | 59.5 | 0.7 | 62 | | |
| XR0510-392 | 3900 | | 40 | 66 | 0.65 | 59 | | |
| XR0510-472 | 4700 | | 40 | 74 | 0.6 | 55 | | |
| XR0510-562 | 5600 | | 30 | 80 | 0.5 | 40 | | |
| XR0510-682 | 6800 | | 30 | 85 | 0.45 | 35 | | |
| XR0510-822 | 8200 | | 30 | 95 | 0.4 | 30 | | |
| XR0510-103 | 10000 | | 50 | 14 | 0.0796 | 1.4 | 100 | |
| 测试仪器 Test equipment | HP4285A (HP4286A ,HP4287A) | | | HP4338B | | HM9461 | HP42841A | |
| 环境温度 Ambient temperature | 18 ~ 25°C | | | | | | | |
| 环境湿度 Ambient humidity | 45%~75% | | | | | | | |

特殊要求的产品可以根据客户要求生产

The products can be customized according to customer requirement.

- 盒带包装尺寸 Ammo packaging dimensions



- 包装盒尺寸 Dimensions of box

单位 Unit : mm

| 编带类型 Tape type | 尺寸 Dimensions (±5mm) | | |
|-------------------|---------------------------|----|-----|
| | A | B | C |
| 52 | 75 | 82 | 260 |
| 26 | 50 | 82 | 260 |

- 包装数量 Packaging quantity

| 包装方式 Packaging style | 盒带包装 Ammo | 卷带包装 Tape & reel | 散包装 Bulk |
|-------------------------|--------------|---------------------|-------------|
| 包装数量 Quantity | 2000 | 2000 | 1000 |

可根据用户需求包装

Packaging according to customer's requirement

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [MaxLinear](#) manufacturer:

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHQ1005P10NJ](#)
[MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC3-R50-R](#) [HC8-1R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#) [DH2280-4R7M](#) [DS1608C-106](#)
[ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#)