

■ Features :

- Economical open frame design
- Wide input range
- High efficiency up to 96%
- Built-in remote ON / OFF control
- Compact size 2.0"x0.512"x 0.421"(SIP package)
- Cooling by free air convection
- Protections: Short circuit / Overload / Over voltage
- 100% burn-in test
- Low cost / High reliability
- 2 years warranty




SPECIFICATION

ORDER NO.		NID30S24-05	NID30S24-12	NID30S24-15	NID30S48-24	
OUTPUT	DC VOLTAGE	5V	12V	15V	24V	
	CURRENT RANGE	0 ~ 2.5A	0 ~ 2.5A	0 ~ 2A	0 ~ 1.25A	
	RATED POWER	12.5W	30W	30W	30W	
	RIPPLE & NOISE (max.) Note.2	100mVp-p	120mVp-p	150mVp-p	200mVp-p	
	LINE REGULATION Note.3	±0.5%				
	LOAD REGULATION Note.4	±0.5%				
	VOLTAGE ACCURACY	±2.0%				
	SWITCHING FREQUENCY (Typ.)	250KHz				
INPUT	EXTERNAL CAPACITANCE LOAD (max.)	100uF / 25V low ESR	68uf/16V low ESR	47uf/50V low ESR		
	VOLTAGE RANGE	20 ~ 53VDC	20 ~ 53VDC	20 ~ 53VDC	30 ~ 53VDC	
	NORMAL VOLTAGE	24VDC (or 48VDC)	24VDC (or 48VDC)	24VDC (or 48VDC)	48VDC	
	EFFICIENCY (Typ.)	91%	95%	96%	93%	
	DC CURRENT	Full load	590mA	1310mA	1320mA	700mA
		No load	20mA	30mA	30mA	50mA
PROTECTION		Fuse recommended (3A)				
PROTECTION	OVERLOAD (Typ.)	120 ~ 300% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed				
	SHORT CIRCUIT	All output equipped with short circuit Protection type : Hiccup mode, recovers automatically after fault condition is removed				
	OVER VOLTAGE	Protection type : Shut off o/p voltage, clamp by TVS diode				
ENVIRONMENT	SAFETY STANDARDS	EAC TP TC 004 approved				
	WORKING TEMP.	-25 ~ +65°C (Refer to "Derating Curve")				
	WORKING HUMIDITY	20% ~ 85% RH non-condensing				
	STORAGE TEMP., HUMIDITY	-25 ~ +105°C, 10 ~ 85% RH				
	TEMP. COEFFICIENT	±0.03% / °C (0 ~ 50°C)				
OTHERS	VIBRATION	10 ~ 500Hz, 2G 10min./1 cycle, period for 60min. each along X, Y, Z axes				
	REMOTE CONTROL	Power on : 3.3VDC < R.C ~ com < 12VDC or open circuit ; power off : R.C ~ com < 0.4VDC or short circuit (PIN5,6 & PIN11)				
	DIMENSION	50.8*13*10.7mm or 2.0**0.512**0.421" inch (L*W*H)				
	WEIGHT	8g				


■ Mechanical Specification

■ Pin Configuration

■ Derating Curve

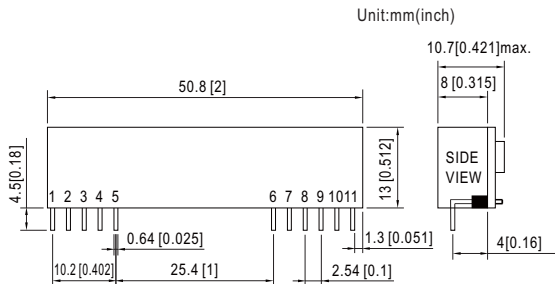

Pin No.	Output
1, 2, 3, 4	+Vout
5, 6	Com
7, 8	+Vin
9, 10	N.C.
11	R.C.

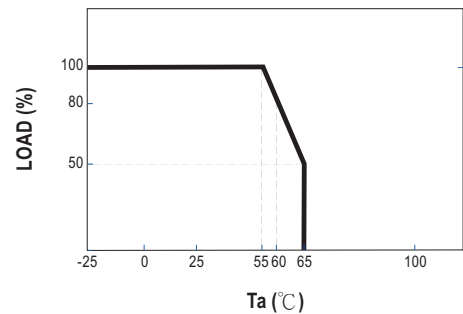

NOTE

- 1.All parameters are specified at normal input, rated load, 25°C 70% RH Ambient.
 - 2.Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uf & 47uf capacitor.
 - 3.Line regulation is measured from low line to high line at rated load.
 - 4.Load regulation is measured from 10% to 100% rated load.
- ※ Product Liability Disclaimer : For detailed information, please refer to <https://www.meanwell.com/serviceDisclaimer.aspx>

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Non-Isolated DC/DC Converters](#) category:

Click to view products by [Mean Well](#) manufacturer:

Other Similar products are found below :

[PSR152.5-7IR](#) [APTH003A0X-SRZ](#) [SPM1004-3V3C](#) [R-785.0-05](#) [10E24-P15-10PPM](#) [1E24-P4-25PPM-SHV-5KV](#) [PROPOWER-3.3V](#)
[MYGTM01210BZN](#) [JRCS016A0S4-HZ](#) [40C24-N250-I5-H](#) [10C24-N250-I10-AQ-DA](#) [4AA24-P20-M-H](#) [3V12-N0.8](#) [3V24-P1](#) [3V24-N1](#)
[BMR4672010/001](#) [BMR4652010/001](#) [T31SN12008NMFA](#) [6AA24-P30-I5-M](#) [6AA24-N30-I5-M](#) [BM2P101X-Z](#) [ROF-78E12-0.5SMD-R](#)
[RPMA5.0-8.0/OF](#) [PTV03010WAD](#) [PTV05020WAH](#) [PTV12010LAH](#) [PTV12020WAD](#) [R-7212D](#) [R-7212P](#) [R-78AA5.0-1.0SMD](#) [30A24-](#)
[N15-E](#) [10A12-P4-M](#) [10C24-N250-I5](#) [10C24-P125](#) [10C24-P250-I5](#) [6A24-P20-I10-F-M-25PPM](#) [1A24-P30-F-M-C](#) [TSR 1-24150SM](#)
[1/2AA24-N30-I10](#) [1C24-N125](#) [12C24-N250](#) [V7806-1500](#) [PTV12020LAH](#) [PTV05010WAH](#) [PTN04050CAZT](#) [PTH12020WAD](#)
[PTH12020LAS](#) [PTH05050YAH](#) [PTH05T210WAH](#) [PTH05030WAZ](#)