




- Features :
 - 2:1 wide input range
 - 4:1 wide input range(option)
 - 1000VDC I/O isolation
 - 3000VDC I/O isolation(option)
 - Built-in EMI filter
 - Protections: Short circuit / Overload
 - Cooling by free air convection
 - Six-sided shield metal case
 - 100% burn-in test
 - Low cost / High reliability
 - Approvals: FCC / EAC / CE / UKCA
 - 2 years warranty



SPECIFICATION

ORDER NO.	SKE15A-05	SKE15B-05	SKE15C-05	SKE15A-12	SKE15B-12	SKE15C-12	SKE15A-15	SKE15B-15	SKE15C-15	SKE15A-24	SKE15B-24	SKE15C-24	
OUTPUT	DC VOLTAGE			12V			15V			24V			
	CURRENT RANGE			125 ~ 1250mA			100 ~ 1000mA			62.5 ~ 625mA			
	RATED POWER												15W
	RIPPLE & NOISE (max.) Note.2			60mVp-p			60mVp-p			80mVp-p			
	LINE REGULATION Note.3												±0.3%
	LOAD REGULATION Note.4												±0.5%
	VOLTAGE ACCURACY												±2.0%
	SWITCHING FREQUENCY												150KHz min.
INPUT	VOLTAGE RANGE												A: 9 ~ 18VDC B: 18 ~ 36VDC C: 36 ~ 72VDC
	EFFICIENCY (Typ.)												79% 79% 80% 80% 82% 82% 80% 83% 83% 82% 83% 84%
	DC CURRENT												Full load A: 1700mA B: 800mA C: 400mA No load A: 40mA B: 20mA C: 10mA
	FILTER												Pi network
	PROTECTION												Fuse recommended
PROTECTION (Note. 5)	OVER CURRENT												160% ~ 250% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed
	SHORT CIRCUIT												All output equipped with short circuit Protection type : Hiccup mode, recovers automatically after fault condition is removed
ENVIRONMENT	WORKING TEMP.												-25 ~ +71°C (Refer to "Derating Curve")
	WORKING HUMIDITY												20% ~ 90% RH non-condensing
	STORAGE TEMP., HUMIDITY												-25 ~ +105°C, 10 ~ 95% RH
	TEMP. COEFFICIENT												±0.03% / °C (0 ~ 50°C)
	VIBRATION												10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes
SAFETY & EMC	SAFETY STANDARDS												EAC TP TC 020/2011 approved
	WITHSTAND VOLTAGE												I/P-O/P:1KVDC
	ISOLATION RESISTANCE												I/P-O/P: 100M Ohms / 500VDC / 25°C / 70% RH
	EMC EMISSION												Compliance to BS EN/EN55032 Class A, FCC part 15 Class A, EAC TP TC 020
	EMC IMMUNITY												Compliance to BS EN/EN61000-4-2,3,4,5,6,8, light industry level, criteria A, EAC TP TC 020
OTHERS	MTBF												300Khrs min. MIL-HDBK-217F(25°C)
	DIMENSION												50.8*50.8*11.0 mm or 2**2**0.43" inch (L*W*H)
	WEIGHT												65g


■ Mechanical Specification

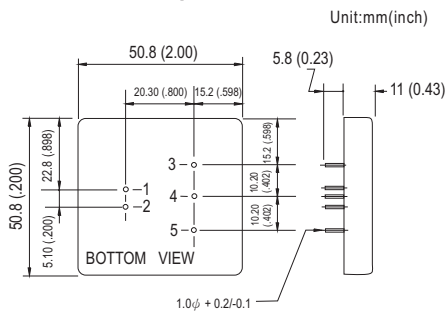

■ Pin Configuration

Pin No.	Output
1	+Vin
2	-Vin
3	+Vout
4	No Pin
5	-Vout

■ Derating Curve

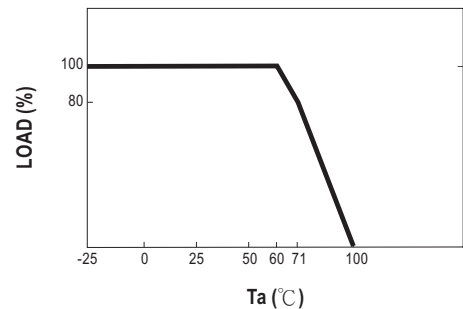

NOTE

- All parameters are specified at normal input, rated load, 25°C 70% RH ambient.
 - Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uf & 47uf capacitor.
 - Line regulation is measured from low line to high line at rated load.
 - Load regulation is measured from 10% to 100% rated load.
 - Please prevent the converter from operating in overload or short circuit condition for more than 30 seconds.
- ※ Product Liability Disclaimer : For detailed information, please refer to <https://www.meanwell.com/serviceDisclaimer.aspx>

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Isolated DC/DC Converters](#) category:

Click to view products by [Mean Well](#) manufacturer:

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [Q48T30020-NBB0](#) [JAHW100Y1](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [19-130041](#) [CE-1003](#)
[CE-1004](#) [GQ2541-7R](#) [RDS180245](#) [MAU228](#) [J80-0041NL](#) [DFC15U48D15](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-2415](#) [XKS-](#)
[1215](#) [06322](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [L-DA20](#) [DCG40-5G](#) [QME48T40033-PGB0](#) [XKS-2415](#) [XKS-2412](#) [XKS-2405](#)
[XKS-1212](#) [XKS-1205](#) [XKS-0515](#) [XKS-0505](#) [XGS-2405](#) [XGS-1215](#) [XGS-0515](#) [PS9Z-6RM4](#) [73-551-5038I](#) [AK1601-9RT](#) [VI-R5022-](#)
[EXWW](#) [PSC128-7iR](#) [RPS8-350ATX-XE](#) [DAS1004812](#) [VI-LJ11-iz](#) [PQA30-D24-S24-DH](#) [VI-M5F-CQ](#) [VI-LN2-EW](#) [VI-PJW01-CZY](#)