


Pin	A	B	C
2	1.25	7.50	
3	2.50	8.75	
4	3.75	10.00	2.50
5	5.00	11.25	3.75
6	6.25	12.50	5.00
7	7.50	13.75	6.25
8	8.75	15.00	7.50
9	10.00	16.25	8.75
10	11.25	17.50	10.00
11	12.50	18.75	11.25
12	13.75	20.00	12.50
13	15.00	21.25	13.75
14	16.25	22.50	15.00
15	17.50	23.75	16.25
16	18.75	25.00	17.50

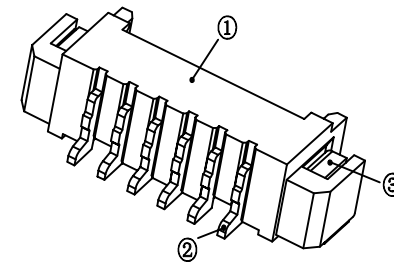

技术参数
 间距: 1.25
 温度范围: -25~+85°C
 额定电压: 125V AC, DC
 额定电流: 1.0A AC, DC
 接触电阻: 20mΩ
 绝缘电阻: 100MΩ
 耐压: 500V AC/minute

线性公差 / General Tolerance X ±0.2 X.X ±0.1 X.XX ±0.05 角度公差 / Angle Tolerance X° ±5.0° X.X° ±3.0° X.XX° ±1.0°					材料 / Material ①塑座: LCP 本色 ②接触针: 黄铜(镀锡) ③焊片: 黄铜(镀锡)			兆星精密电子(深圳)有限公司 品名 / ProduceName MX1.25 卧贴 4P 型号 / Model ZX-MX1.25-4PWT
	标记 绘图 审核 工艺	变更内容 	签名 	年月日 	阶段标记 	版本 2.0	比例 1:1	
视角 / Projection 	批准 	共 1 张 第 1 张						

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Megastar](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#) [821-22-002-10-001101](#)