

# **QVGA TIME-OF-FLIGHT CHIPSET EVALUATION KIT**

The EVK75123 is the evaluation kit for the MLX75023 and MLX75123 Time-of-Flight (TOF) chipset. This new chipset enables real-time 3D imaging at full QVGA resolution with unsurpassed sunlight robustness. The evaluation kit is a complete camera built around this chipset and can be directly connected to a PC for visualization and recording of depth map data, while allowing direct access to many configuration settings.

EVK75123 is a modular plug and play platform perfectly set up for customization by its customers. The kit consists of four stacked PCBs (from top to bottom: illumination board, TOF chipset board, interface board and a processor board). It is possible to detach the top two PCBs from the bottom two PCBs by bypassing the board to board connection with an external cable suitable for FPD-Link III communication. A graphical user interface for Windows is provided for live depth map visualization, basic recording, analysis and configuration. For custom SW development, a MATLAB SDK and C API is also provided. The built-in flexibility of our evaluation kit enables any designer to develop the necessary system know-how and experience for use in their application.

The evaluation kit is available in variants with 60 deg and 110 deg field-of-view (FOV).

#### **KEY FEATURES**



**⊘** QVGA resolution

20 klux sunlight rejection

VCSEL illumination (60° or 110°)


Modulation frequency up to 40MHz

Distance and confidence data at max. 60 FPS

Visualizer, C API and Matlab SDK

Dimensions: 80 x 50 x 35mm

15mm TOF chipset board only

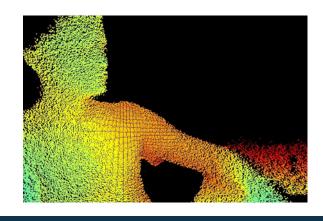



#### **ILLUMINATION BOARD**

- 4x VCSELs (60° or 110° field of view)
- Programmable peak optical power (0 25W)
- Onboard temperature sensor
- Eye safe (certificate available)

# **TOF CHIPSET BOARD**

- MLX75023 QVGA, 320x240 pixels, TOF sensor array
- MLX75123 TOF companion chip
- Standard S mount (M12x0.5) lens holder
- Programmable input clock and VMIX voltage
- FPD-Link III serializer

### **INTERFACE BOARD**

- Interface between TOF Chipset Board and CM-i.MX6 Board
- FPD-Link III deserializer
- Power input (9 16V) and RJ45 ethernet connector
- GPIO connector (I<sup>2</sup>C, SPI, VIN, 3V3 & three GPIOs)

#### CM-I.MX6 PROCESSOR BOARD

- Quad core i.MX6 processor running up to 1.2 GHz
- Calculates the distance and confidence data


#### **EVK75123 PACKAGE CONTENTS**

- ✓ 1x HW module
- 2 1x ethernet cable
- Visualizer for Windows
- MATLAB SDK & C API (+ example code)
- Registration number (for SW, documentation & support)

## **EVK75123 ORDER CODES**

- EVK75123-110-850-1: 110deg FOV, 850nm VCSELs
- EVK75123-110-940-1: 110deg FOV, 940nm VCSELs

#### **BLOCK DIAGRAM**

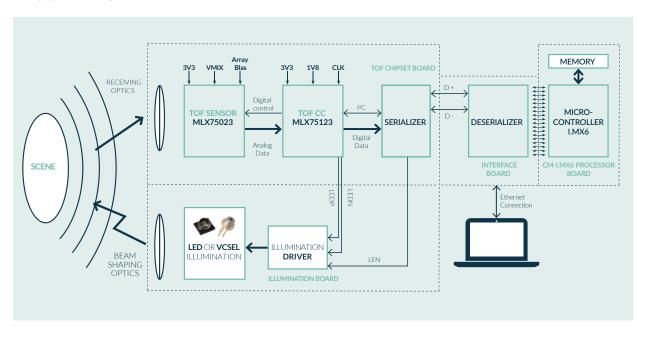

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Distance Sensor Development Tool category:

Click to view products by Melexis manufacturer:

Other Similar products are found below:

SEN0004 MIKROE-2509 172 DFR0315 SEN0006 SEN0007 SEN0008 SEN0187 SEN0202 SEN0208 DM160234 SEN0143 SEN-13968
3316 SEN-08504 SEN-08502 DFR0445 3317 984 SEN0014 SEN0001 SEN0171 3942 979 981 982 985 AFBR-S50MV85G-EK
TMF8701-DB TMF8801-DB TMF8801-EVM AD8283CP-EBZ AD8285CP-EBZ ADUX1020-EVAL-SDP SEN0245
EVALBGT24LTR22TOBO1 DM160238 MIKROE-3339 MIKROE-3439 MIKROE-1589 MIKROE-1991 MIKROE-2086 MIKROE-3103
SECO-RANGEFINDER-GEVK PIM058 PIM062 PIM373 101020083 101020353 101020532