


- High Common Mode Impedance at High Frequency.
- Excellent Noise Suppression Performance.
- Small Size and Low Profile, Surface Mount Type.
- Operating Temperature Range: -40°C to +85°C.
- RoHS Compliant.



Electrical Specifications @25°C

Part Number	Common Mode Impedance	Insulation Resistance	Rated Current	DC Resistance	Rated Voltage	Withstand Volt
	Ω , @100MHz	M Ω Min	mA Max	Ω Max	Vdc Max	Vdc Max
CC2012A-801	800±25%	10	300	0.88	50	125


MECHANICAL DIMENSIONS (unit:mm)

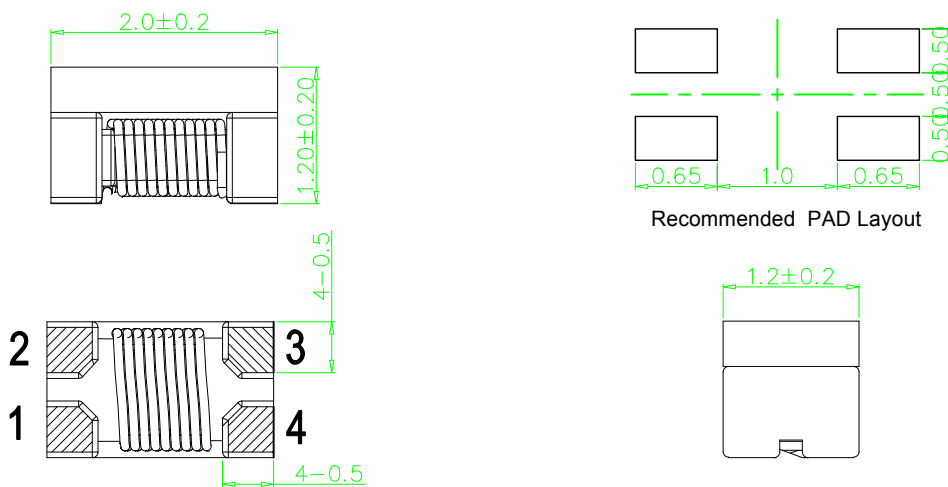


Recommended PAD Layout

Unless otherwise specified all tolerances are: ± 0.25 mm

SCHEMATIC

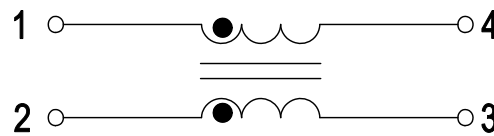

Impedance-Frequency Characteristics (Typical)

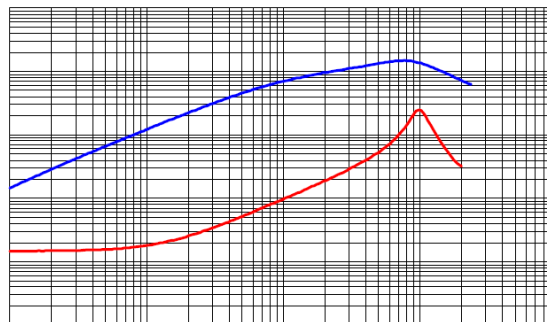

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Audio Transformers / Signal Transformers](#) category:

Click to view products by [Mentech](#) manufacturer:

Other Similar products are found below :

[CU4S0506AT-2655-H1](#) [CX2041NLT](#) [MGPWT-00449-P](#) [PE-64961](#) [H1302FNLT](#) [H5008FNL](#) [H5012FNL](#) [H5020FNLT](#) [H5077NLT](#)
[H5079NLT](#) [H5084FNLT](#) [1812WBT2-4](#) [1879479-1](#) [HX2260FNL](#) [PA1528ANL](#) [EX2024FNL](#) [T1137NLT](#) [T3012NL](#) [PE-65812FNL](#) [PE-65848FNLT](#) [H1174FNL](#) [H1302FNL](#) [H5015FNL](#) [H5019EFNL](#) [H5062FNLT](#) [CX2045ALNLT](#) [CX2047LNL](#) [MET-14](#) [MGPWT-00059-P](#)
[MGPWT-00266-P](#) [MGPWT-00278-P](#) [MGPWT-00431-P](#) [TTC-100](#) [TTC-143-H](#) [BX1194WNLT](#) [HX1234NLT](#) [HX5008FNLT](#) [HX5019FNL](#)
[HX5084NL](#) [3-1879385-5](#) [TX1263NLT](#) [4-1879391-0](#) [100213](#) [T1142NL](#) [HX6101FNL](#) [HX5084FNL](#) [HX1148NL](#) [HX5020FNLT](#)
[HX5014FNLT](#) [T1124NL](#)