


- IEC60950 Compatible
- RoHS Compliance Product
- Surface Mount Device Providing Compact Footprint
- Operating temperature range:-40°C to +85°C




Electrical Specifications @25°C								
Part Number	Turns Ratio @20KHz, 1V	OCL @200KHz,0.1V	OCL @200KHz,0.1V (Ipk 2.6A/DC)	LK @100KHz,0.1V	DCR			HI-POT 1mA/3S
EFD-021SG	1,2-3,4:10,11,12-7,8,9:5-6	1,2-3,4	1,2-3,4	1,2-3,4(short other pins)	1,2-3,4	5-6	10,11,12-7,8,9	Pri/Aux TO Sec
	1:0.333:0.333±3%	42uH±10%	L <sub>2,6A</sub> ≥90%(L <sub>0A</sub> )	1.0uH max	61mΩ max	195mΩ max	15mΩ max	1500V/AC

## MECHANICAL

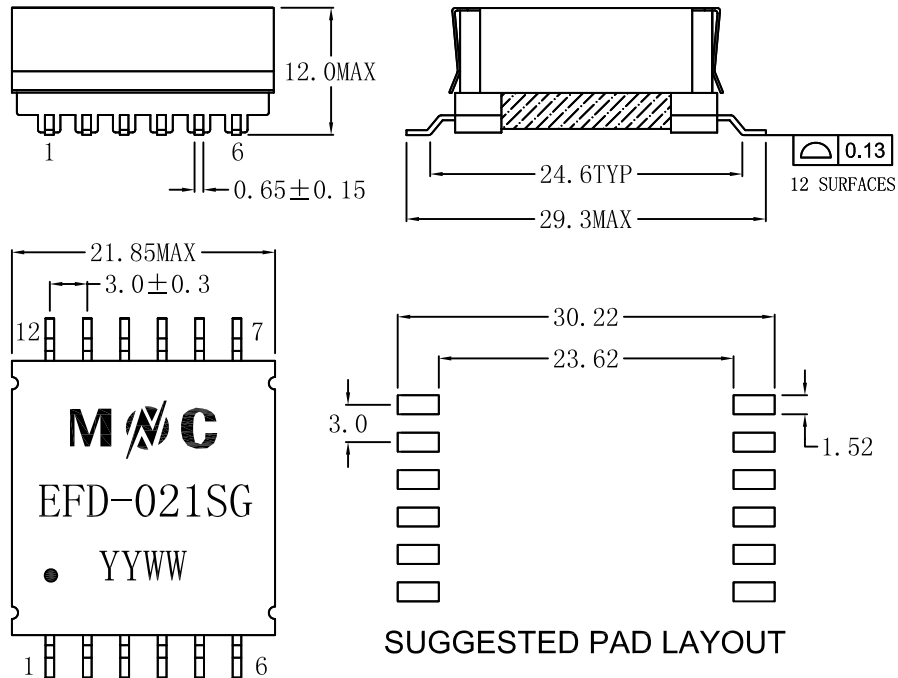

Unless otherwise specified all tolerances are:±0.25 in mm

## SCHEMATICS

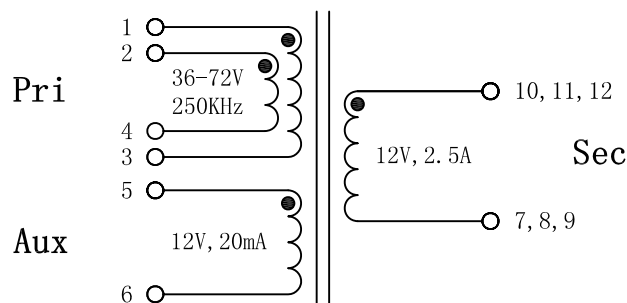

● Start Point

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Audio Transformers / Signal Transformers](#) category:*

*Click to view products by [Mentech](#) manufacturer:*

Other Similar products are found below :

[CU4S0506AT-2655-H1](#) [MGPWT-00449-P](#) [PE-64961](#) [1812WBT2-4](#) [BX1194WNL](#) [1879479-1](#) [PA1528ANL](#) [T1137NLT](#) [T3012NL](#) [PE-65848FNLT](#) [H5019EFNL](#) [CX2045ALNLT](#) [MET-14](#) [MGPWT-00059-P](#) [MGPWT-00266-P](#) [MGPWT-00278-P](#) [MGPWT-00431-P](#) [TTC-100](#) [TTC-143-H](#) [TTC-5032-1](#) [4-1879391-0](#) [100213](#) [T1142NL](#) [T1124NL](#) [1879732-1](#) [2-1879391-5](#) [B8846NL](#) [MABA-010321-CT1A42](#) [TX1341NL](#) [H0013FNL](#) [H5020FNL](#) [H2009FNLT](#) [H5004NLT](#) [S553-5999-52-F](#) [T5008NLT](#) [PE-68517T](#) [TG111-E212NWLFR](#) [MGPWT-00339-P](#) [H5014FNLT](#) [TX1473NLT](#) [PE-69011NLT](#) [CX2043LNLT](#) [H7137FNLT](#) [H1259NLT](#) [TX1344NLT](#) [LM-LP-1005L](#) [H0013NLT](#) [S558-5500-JV](#) [TX1193NLT](#) [T7015NL](#)